

4.5" MINI MADISON CYLINDER - PENDANT


CABLE PENDANT MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

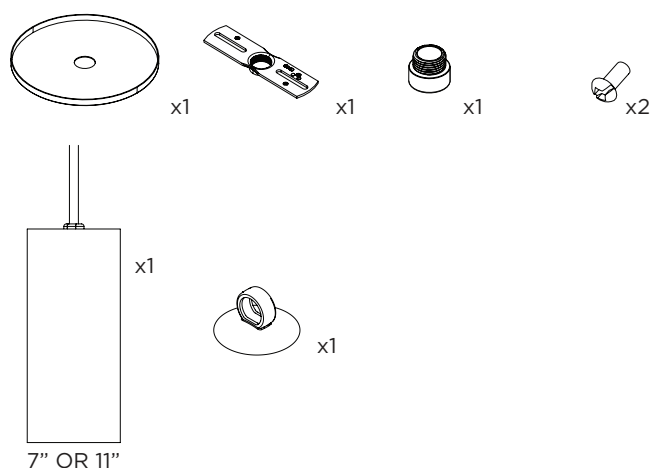


CONDUIT FEED CANOPY

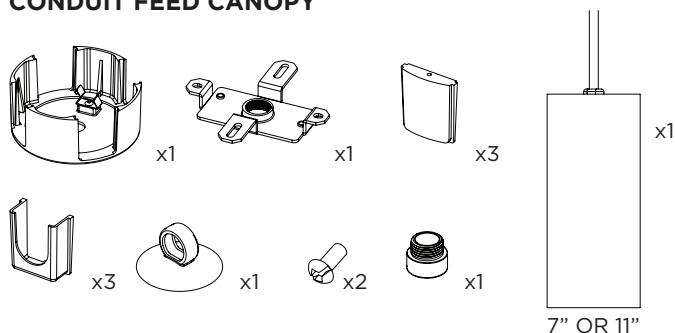

POWER CANOPY

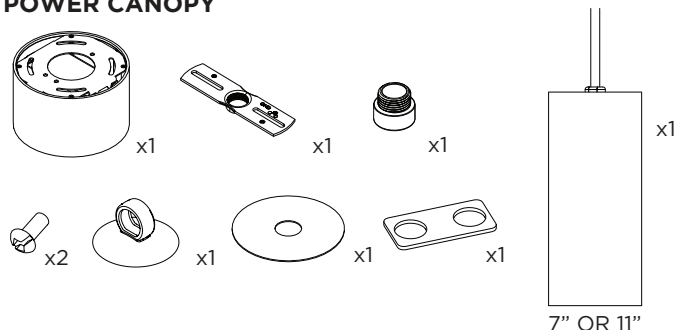










4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

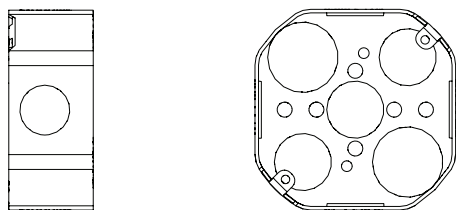


JUNCTION BOX (BY OTHERS)


INSTRUCTION KEY	INFORMATION
⚠	ADDITIONAL
ⓘ	ATTENTION
⚡	POWER ON
⏻	POWER OFF
	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

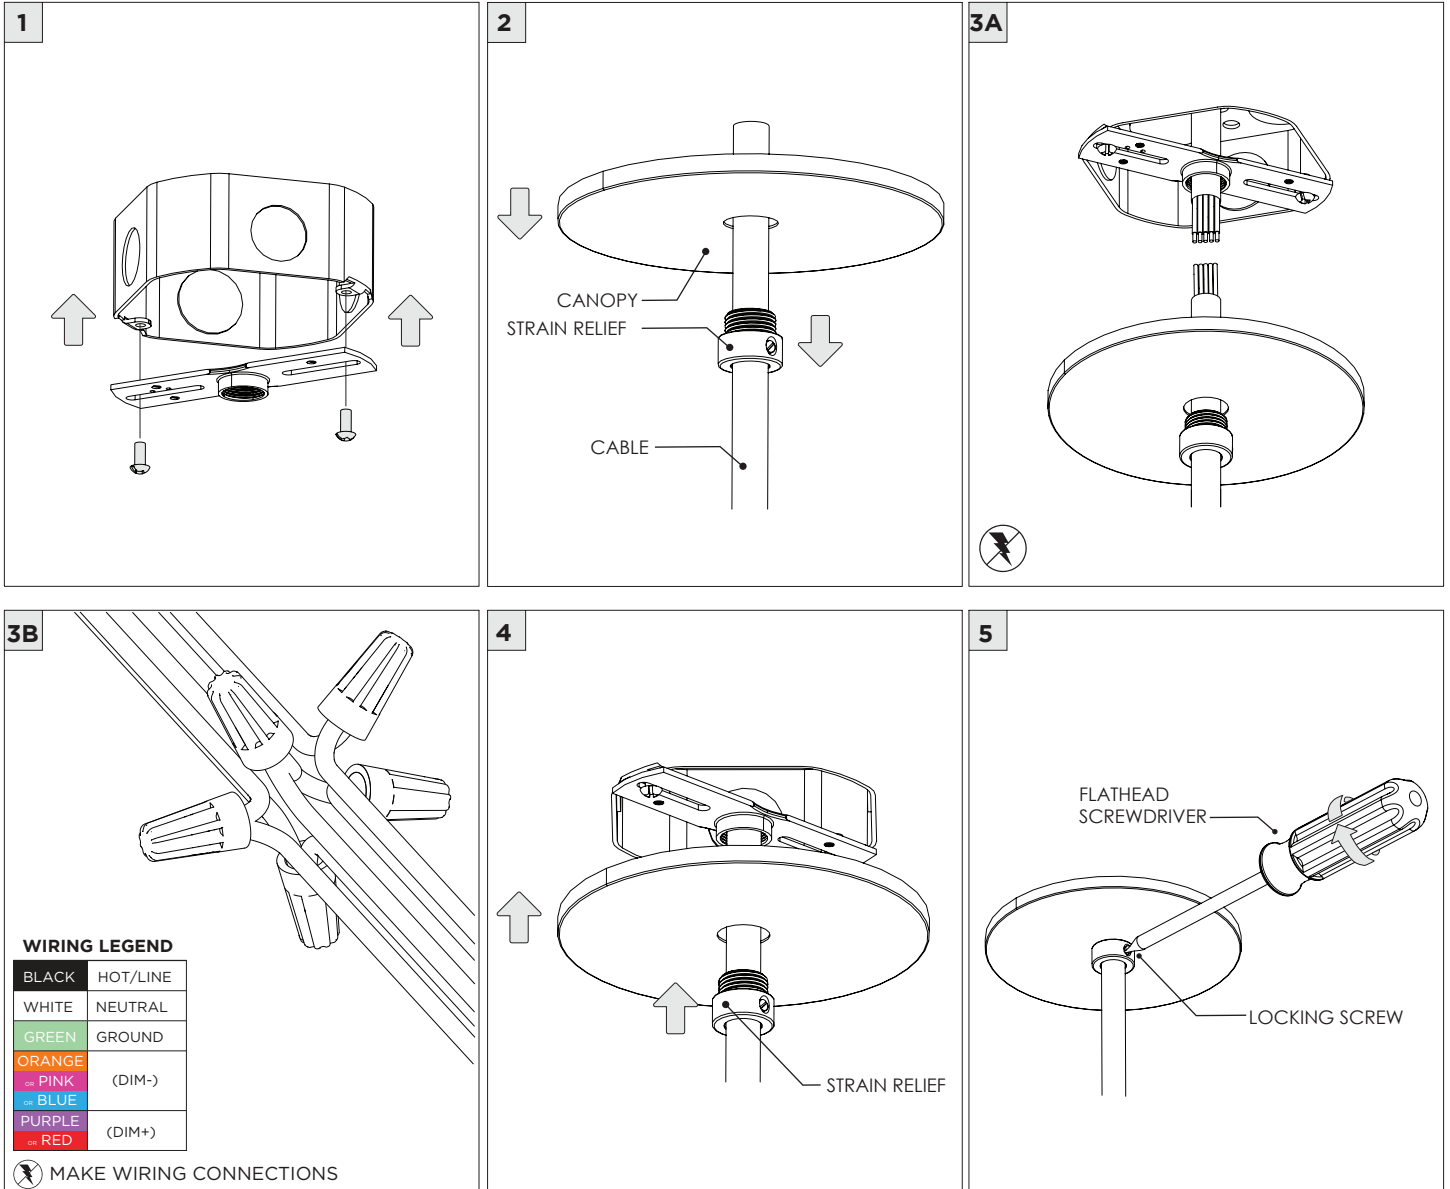

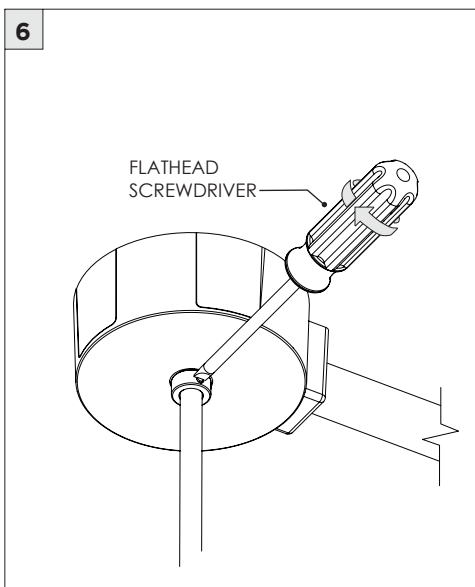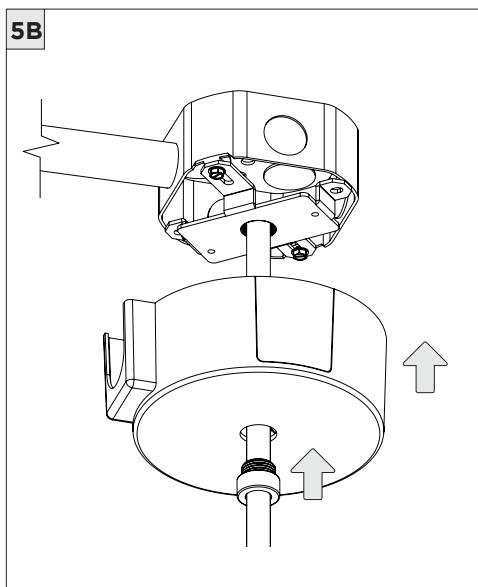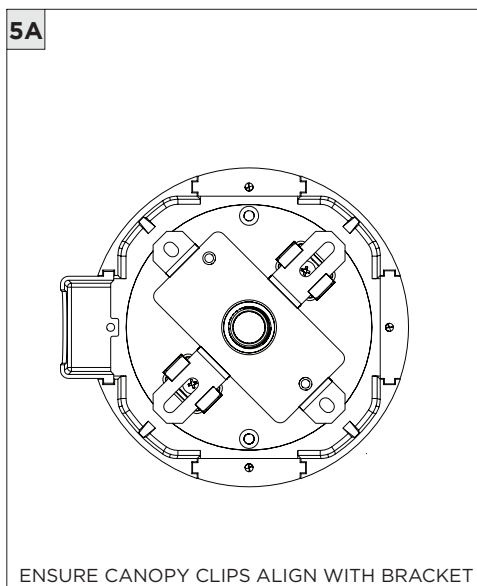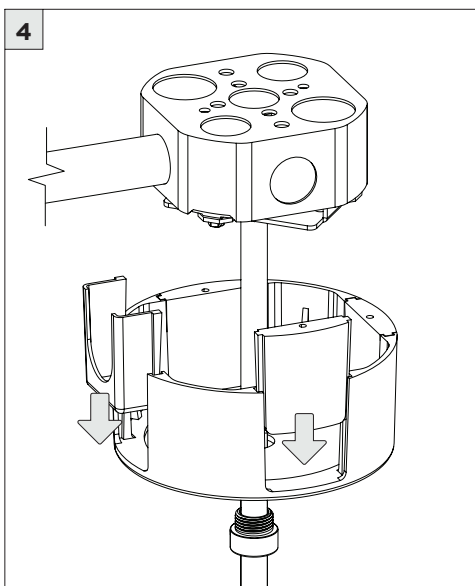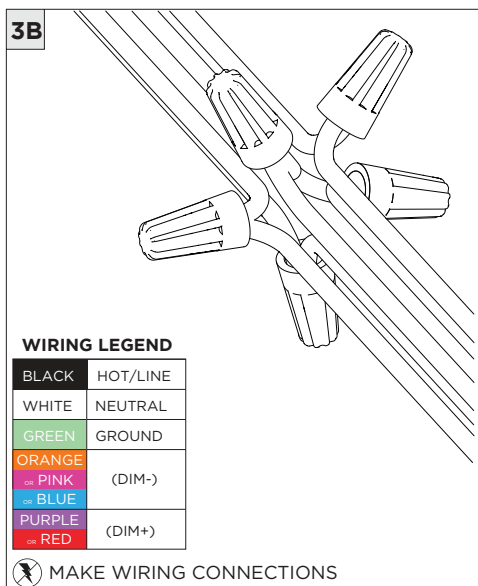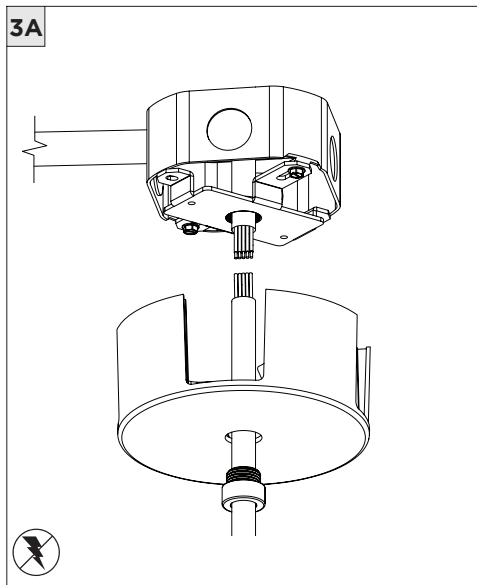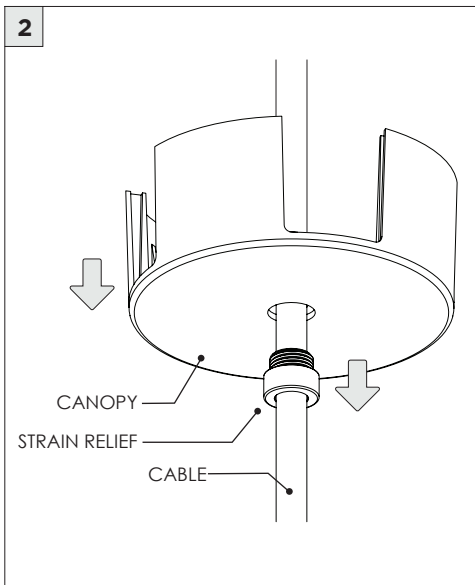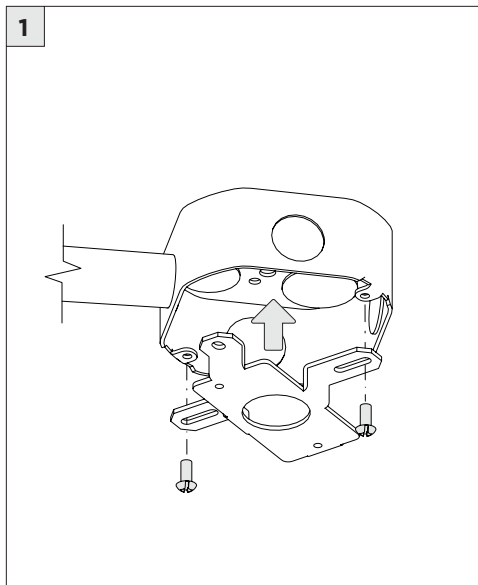


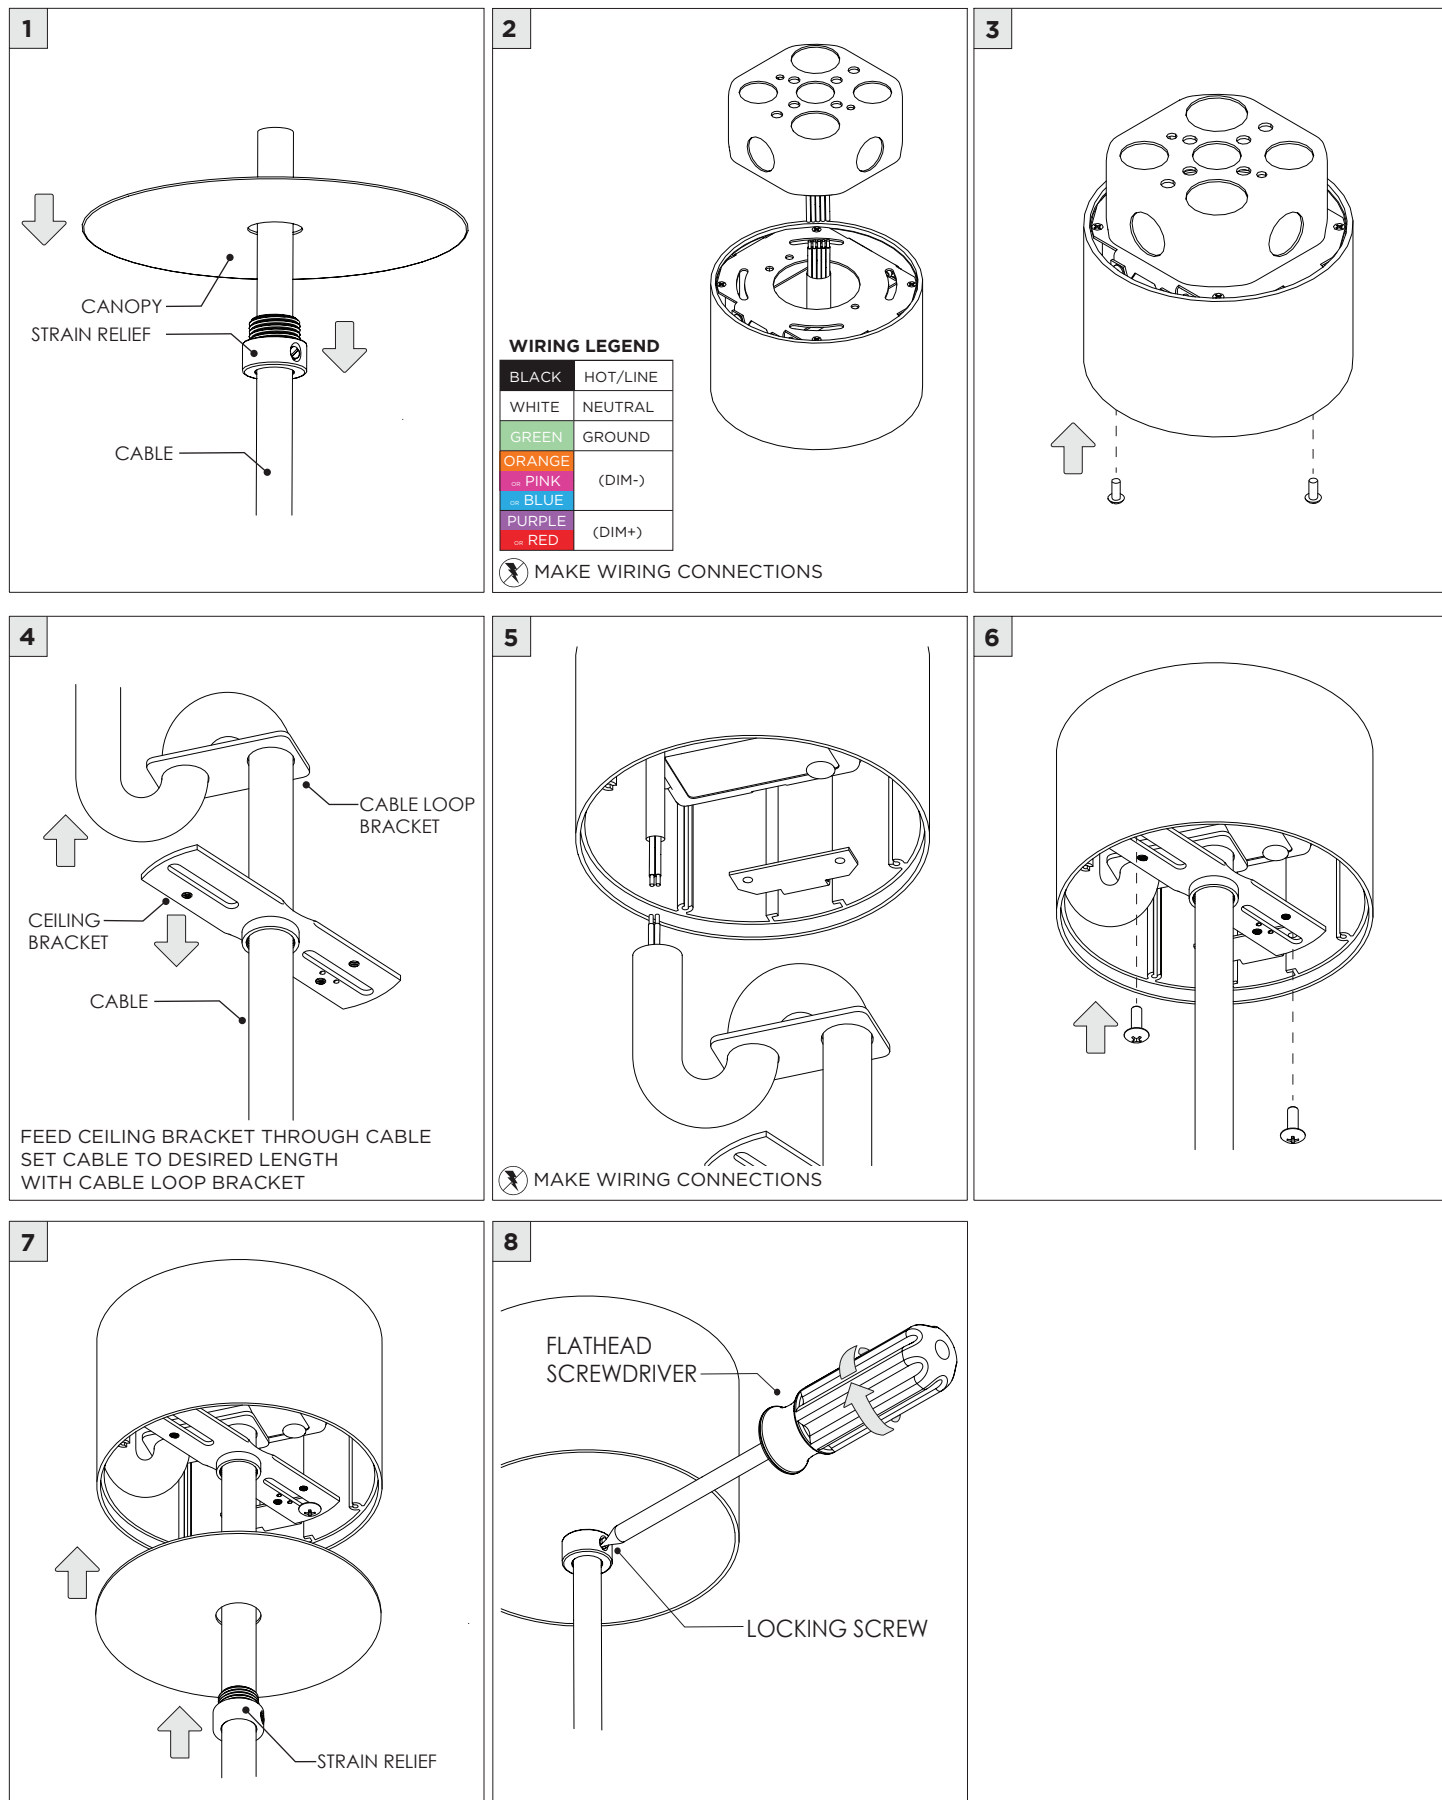


1 CONDUIT FEED CANOPY

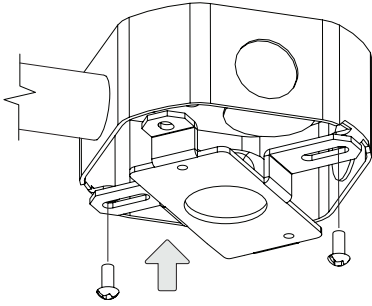

2

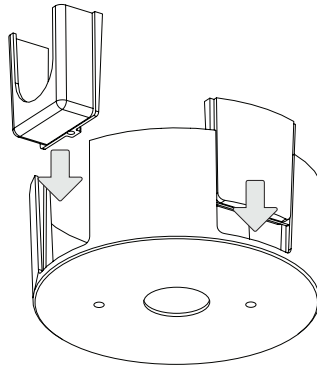


3

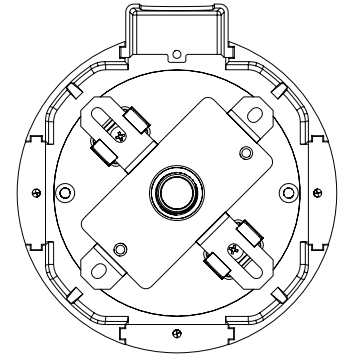


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

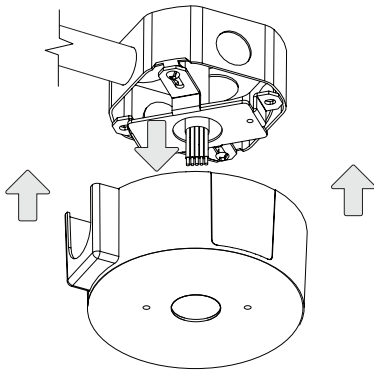


CONNECT CANDUIT CANOPY AND FEED
JUNCTION BOX WIRES THROUGH HOLE

5

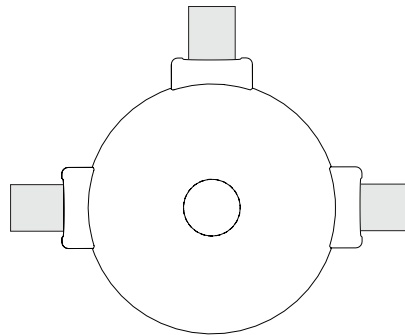

! CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

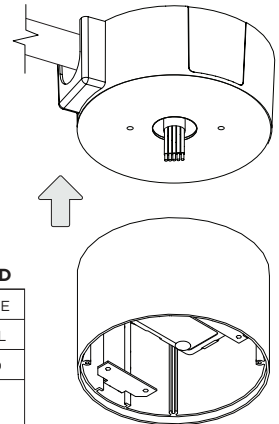


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PINK	(DIM-)
BLUE	(DIM-)
PURPLE	(DIM+)
RED	(DIM+)

⚡ MAKE WIRING CONNECTIONS


7





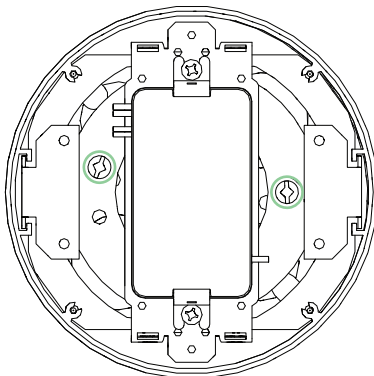


8

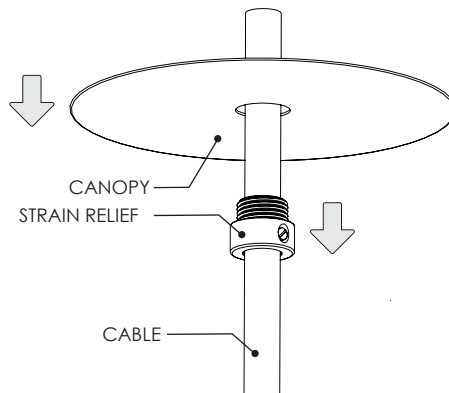


9

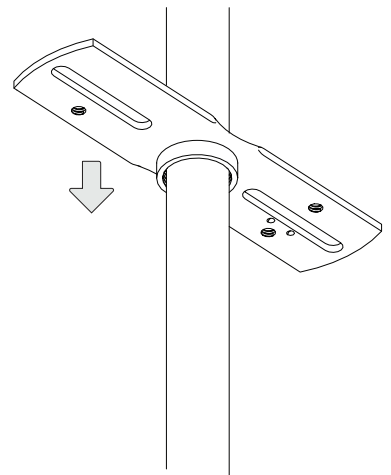

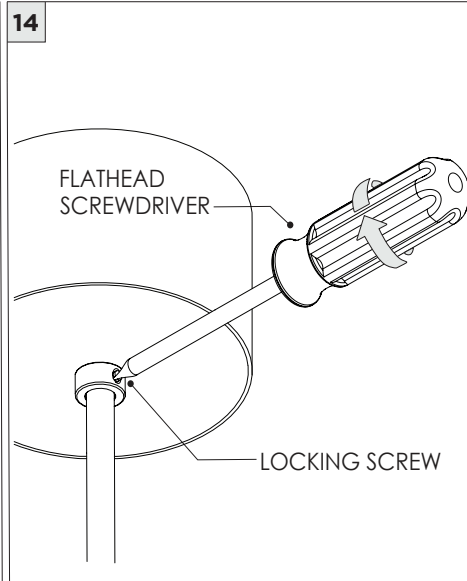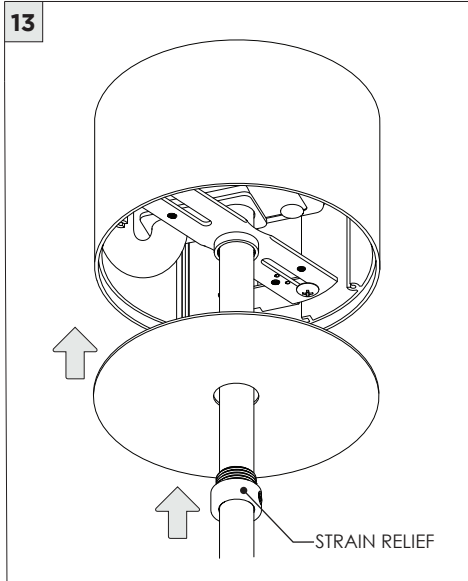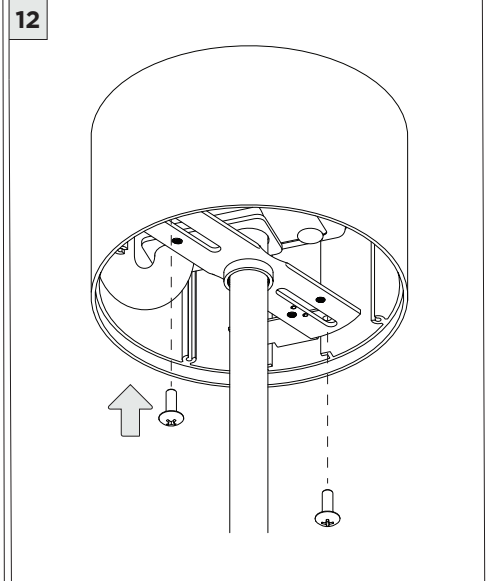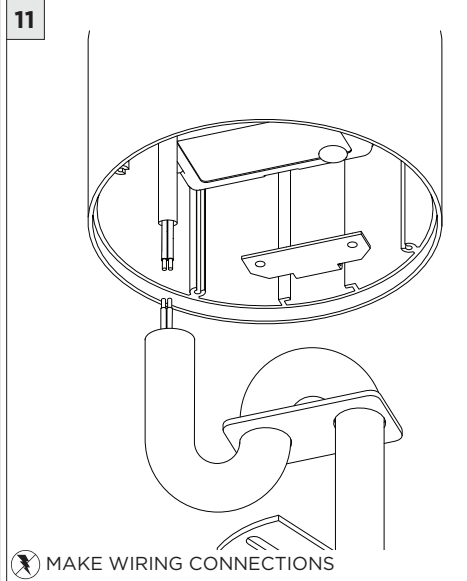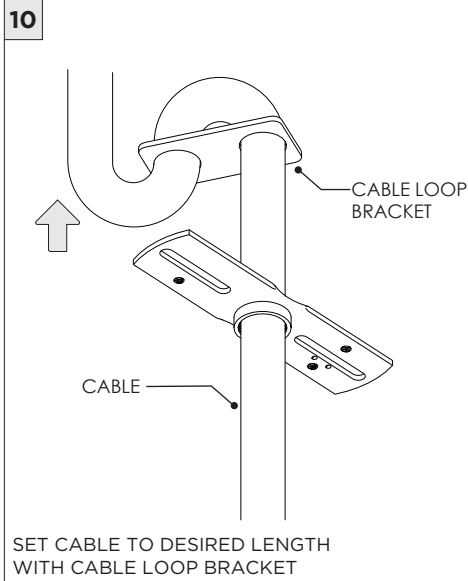


DRIVER SERVICING

1

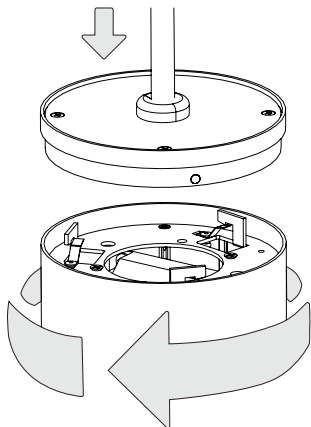


2

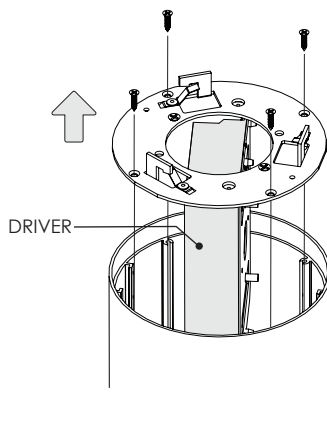


LED SERVICING


1

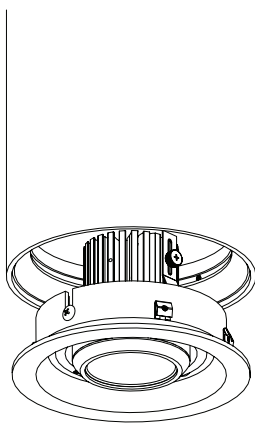

2

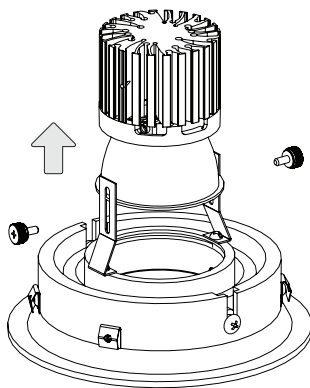


3

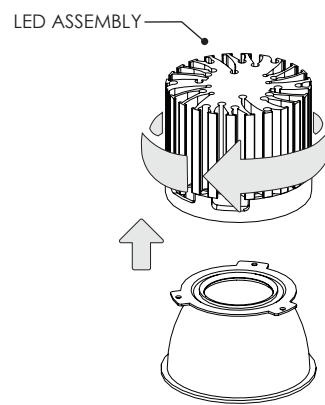


DRIVER SERVICING


1

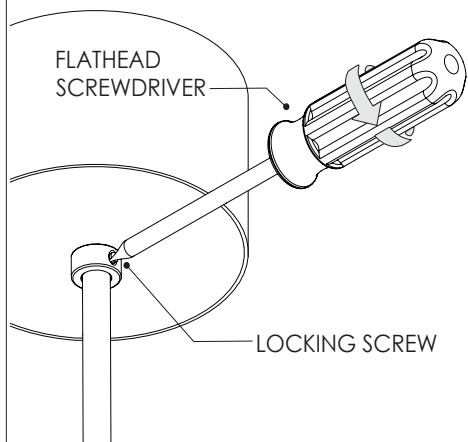


2

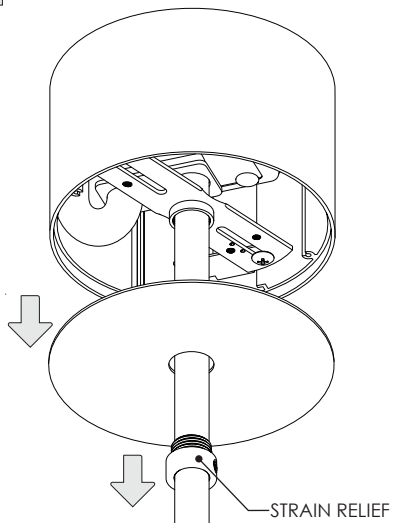

3

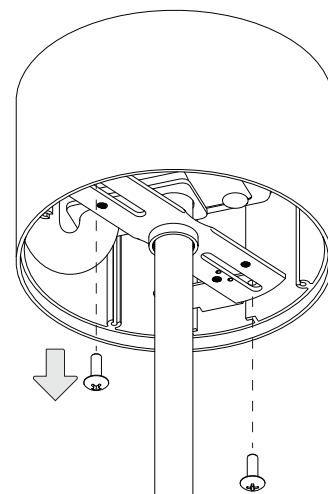

4

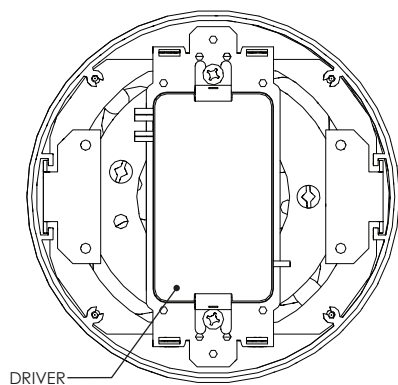


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

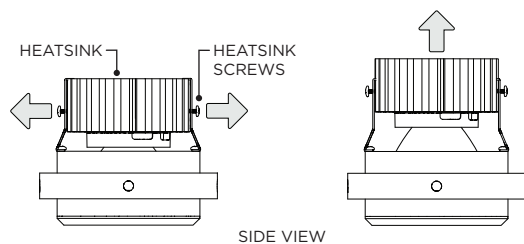


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

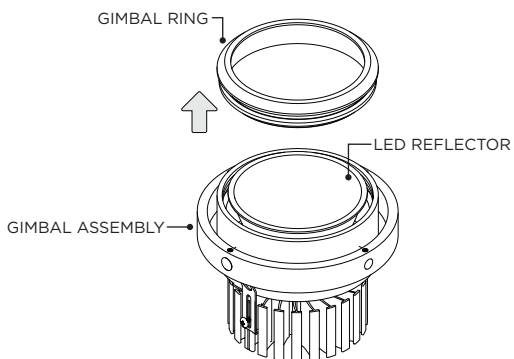


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

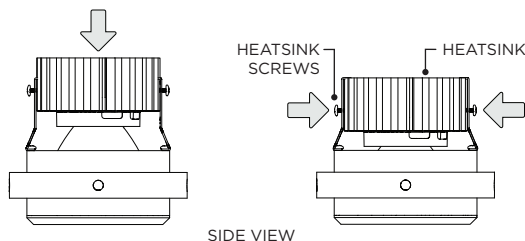

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS