


4.5" MINI MADISON CYLINDER

SURFACE MOUNT




COMPONENTS


STANDARD CANOPY

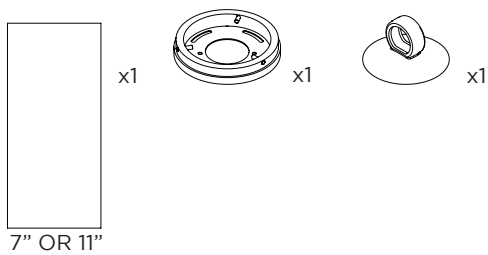

CONDUIT FEED CANOPY




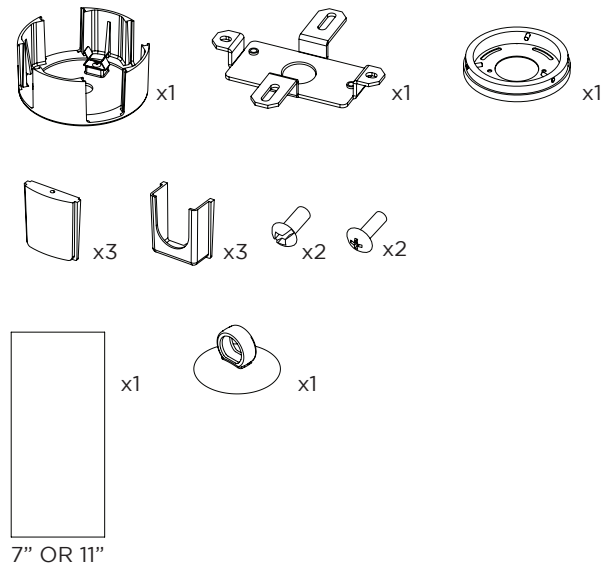











4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

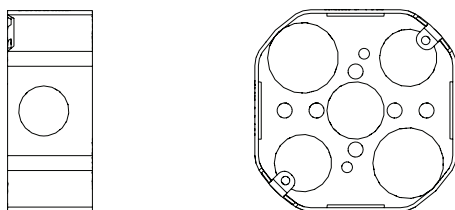


JUNCTION BOX (BY OTHERS)

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ⓘ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
⚡ POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
⏻ POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

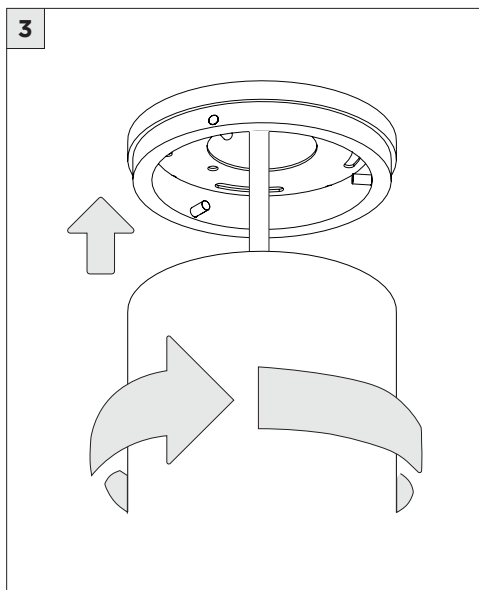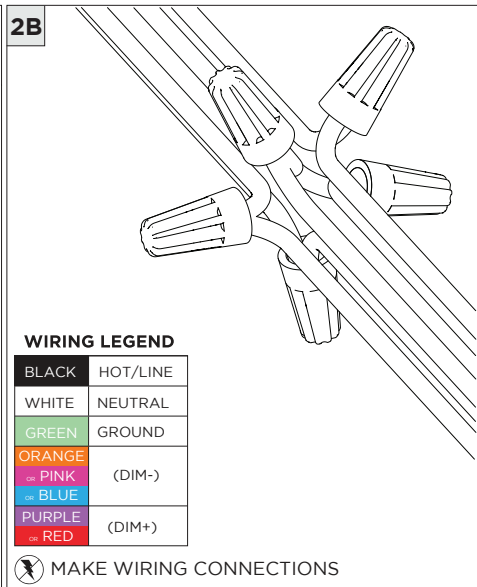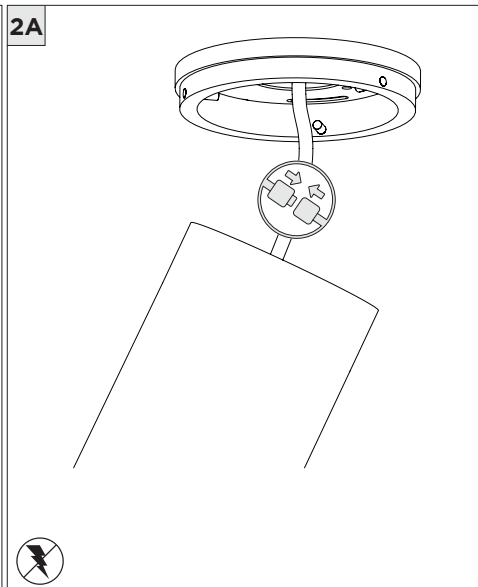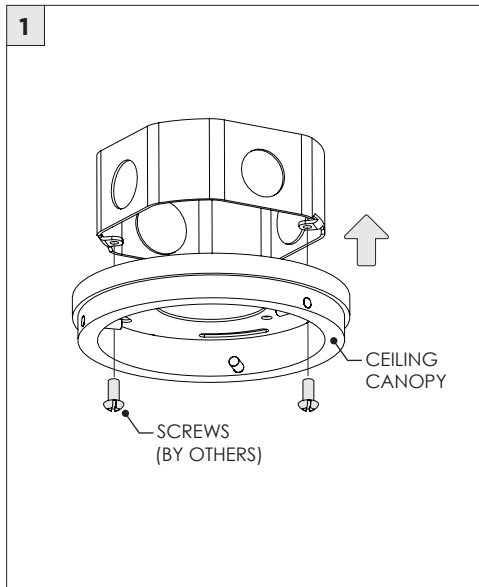


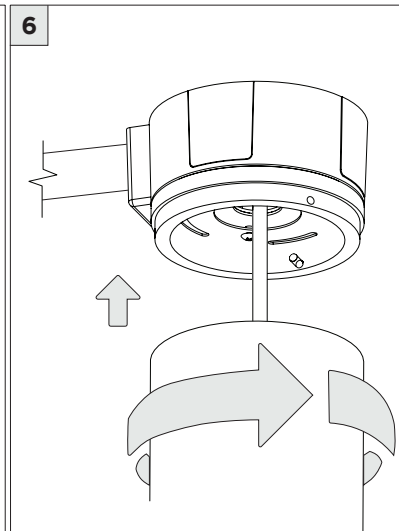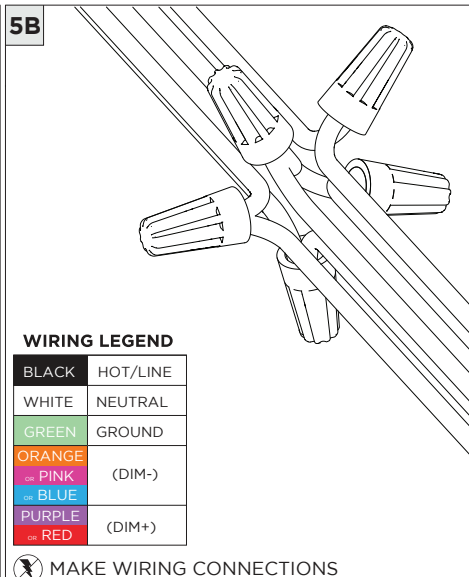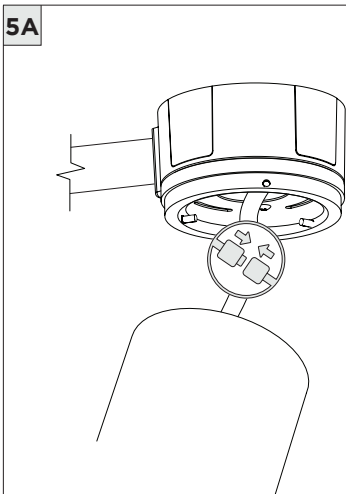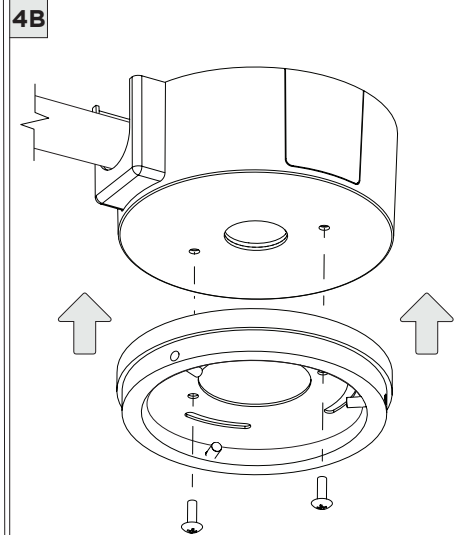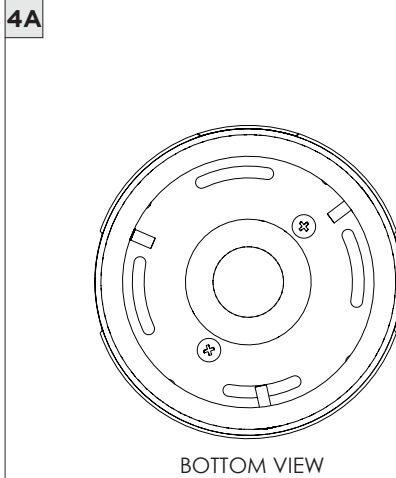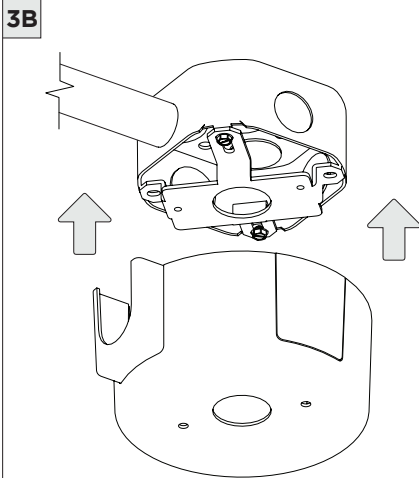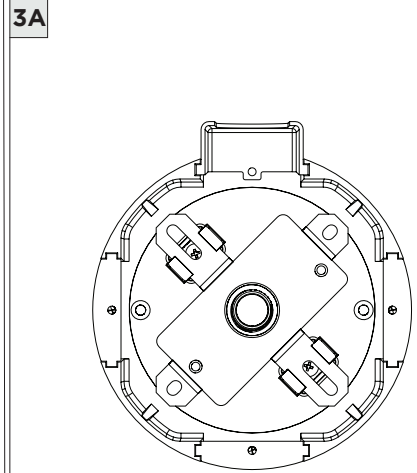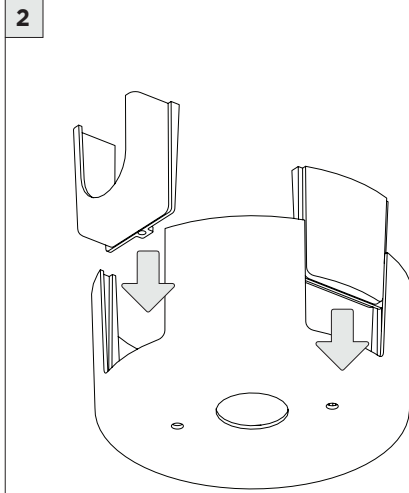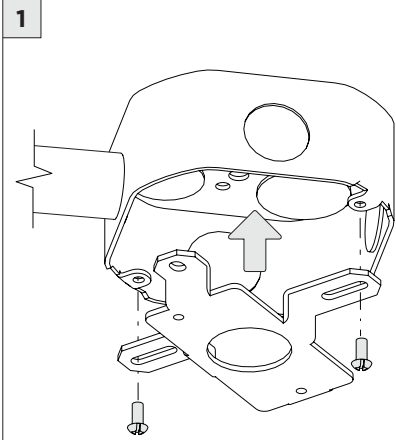

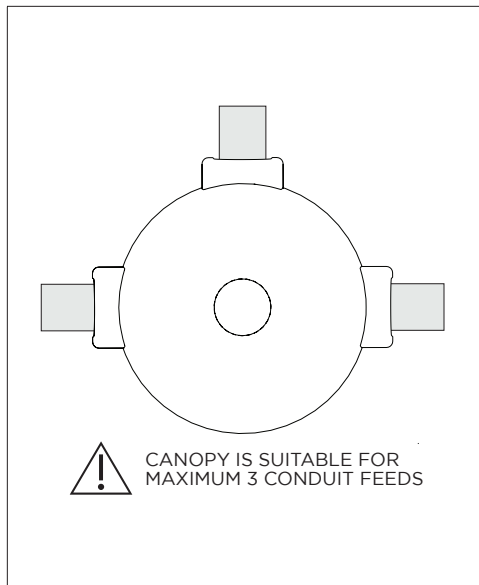


DRIVER SERVICING


1

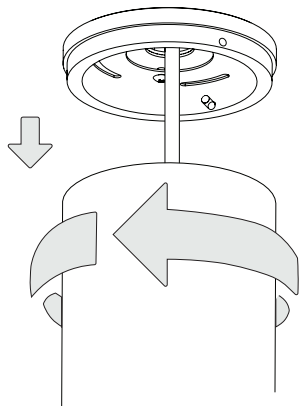

2

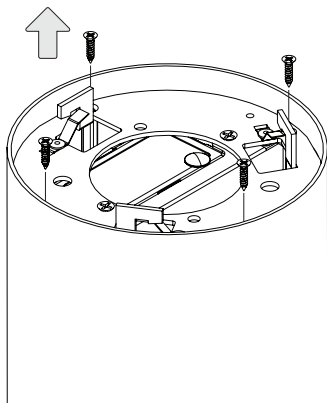


2

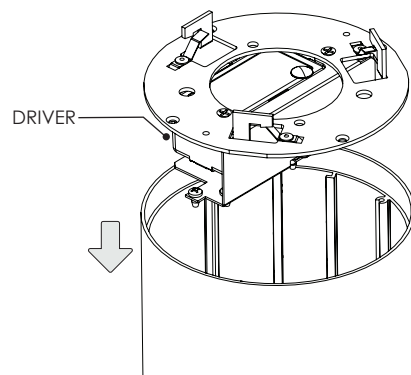


LED SERVICING


1

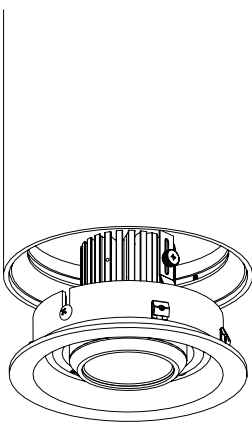

2

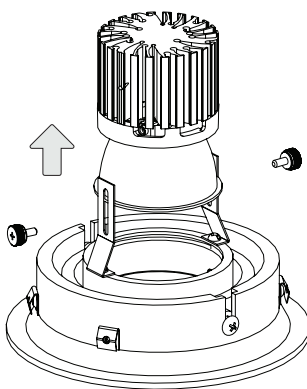


3

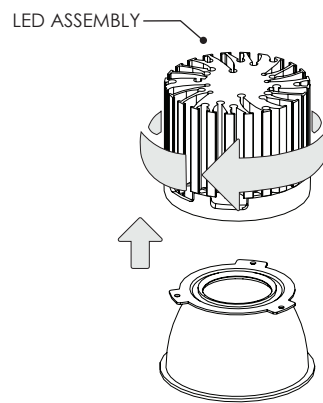


DRIVER SERVICING


1

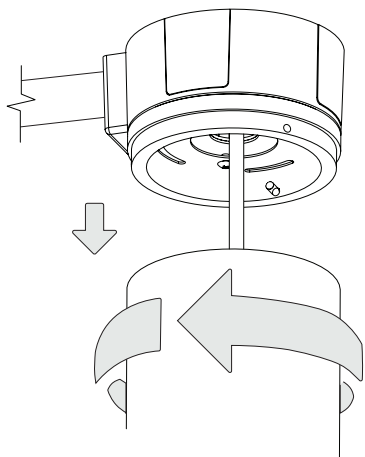

2

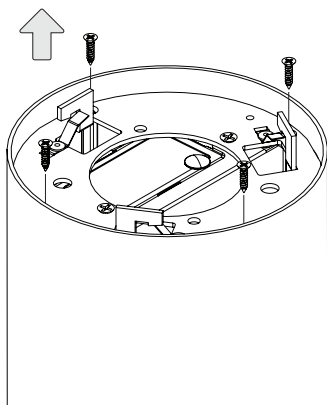


2

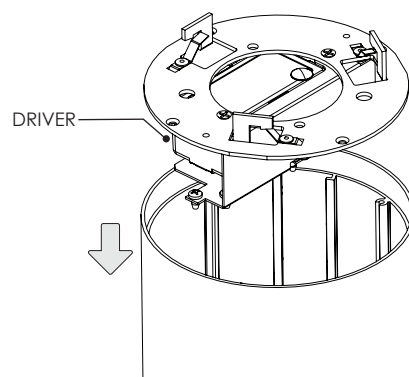


LED SERVICING


1

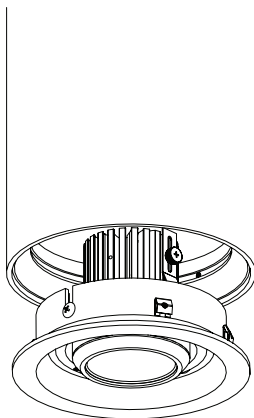

2

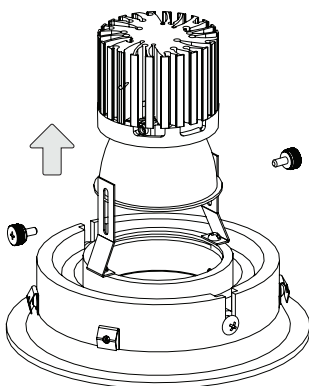

3

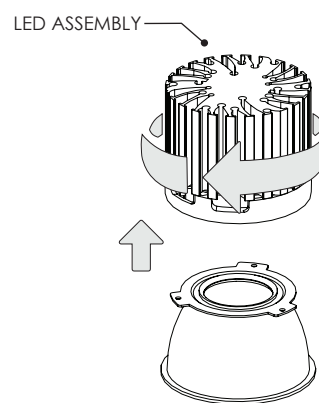


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

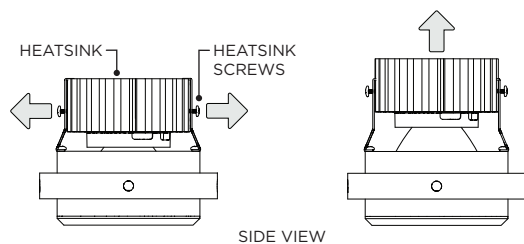


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

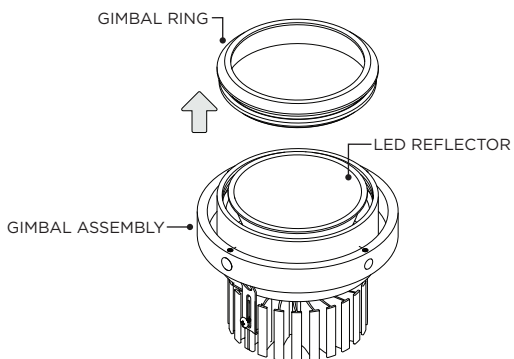


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

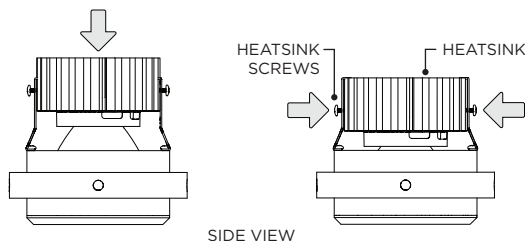

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS