




3G-58RMSL, 3G-48RMSL, 3G-38RMSL
5.8”, 4.8” and 3.8” RECESSED SLOT
TRIMLESS



⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY



ℹ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

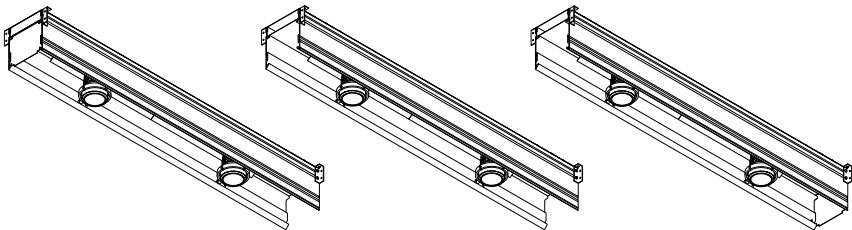FIXTURE TYPES			INCLUDED COMPONENTS		
58RMSL PROFILE	48RMSL PROFILE	38RMSL PROFILE			
			STARTER	JOINER	ENDER

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
ℹ ATTENTION	
⚡ POWER ON	
⏻ POWER OFF	

OVERVIEW


TRIMLESS - XTR

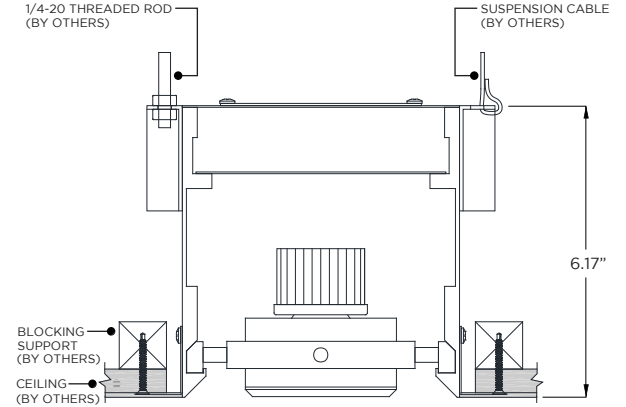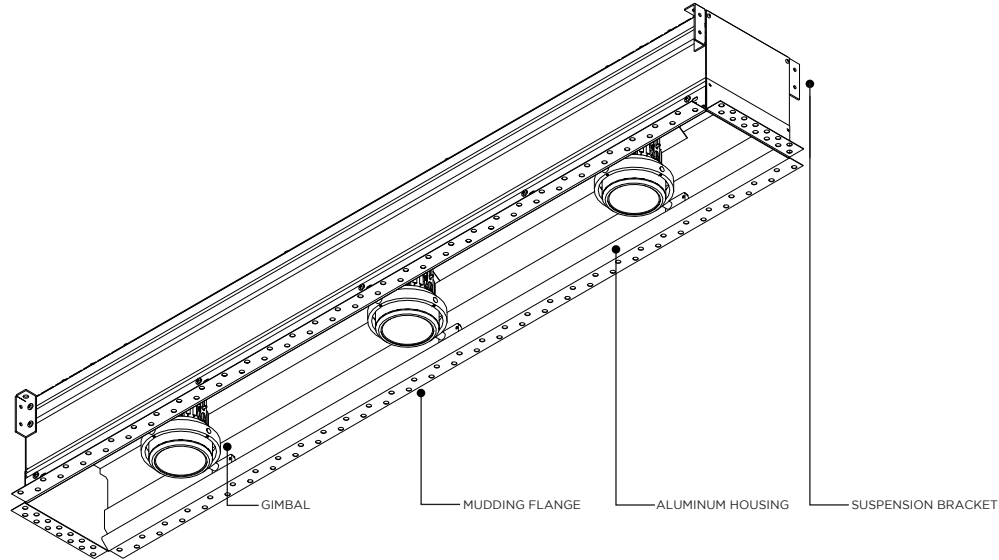


TRIMLESS - XTR - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3Gi-38RSL	3.95"	LENGTH + 0.40"
3Gi-48RSL	4.95"	LENGTH + 0.40"
3Gi-58RSL	5.95"	LENGTH + 0.40"

THREADED ROD LOCATION

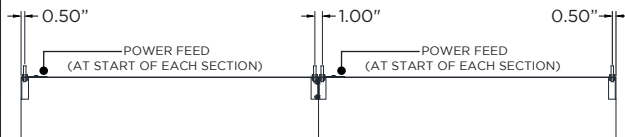

IDENTIFICATION AND PREPARATION









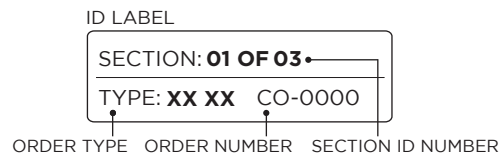


i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS


ID LABEL

SECTION: **01 OF 03**
TYPE: **XX XX** CO-0000




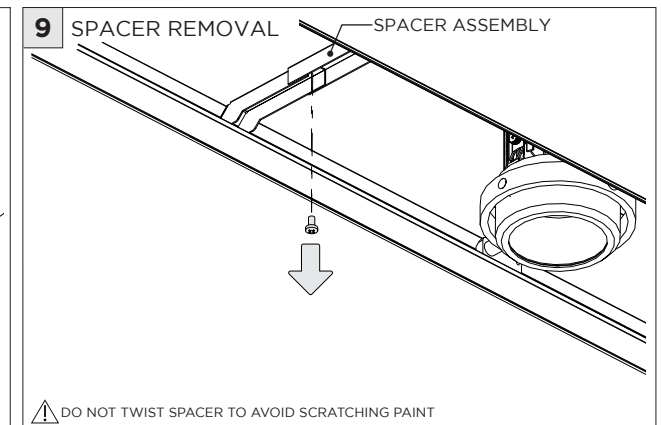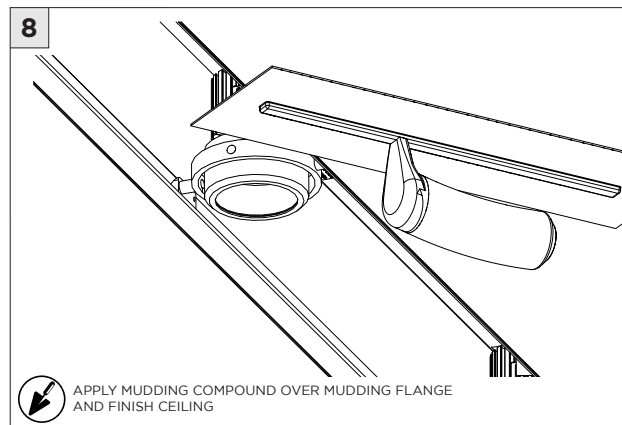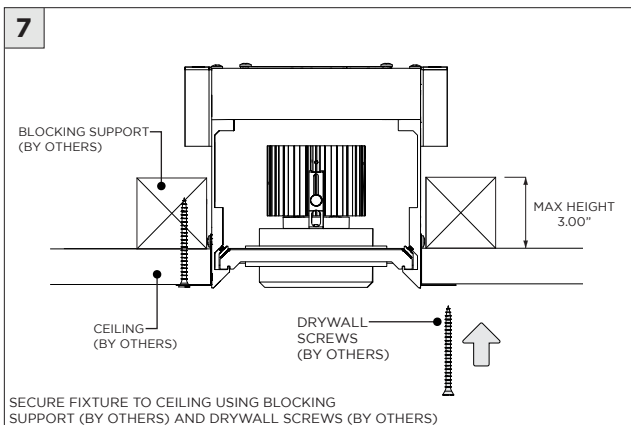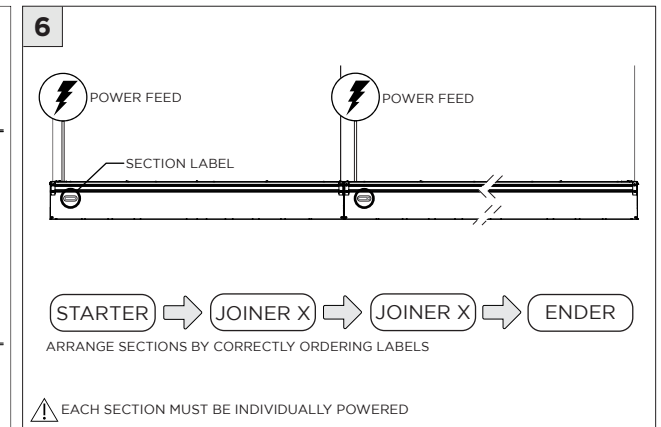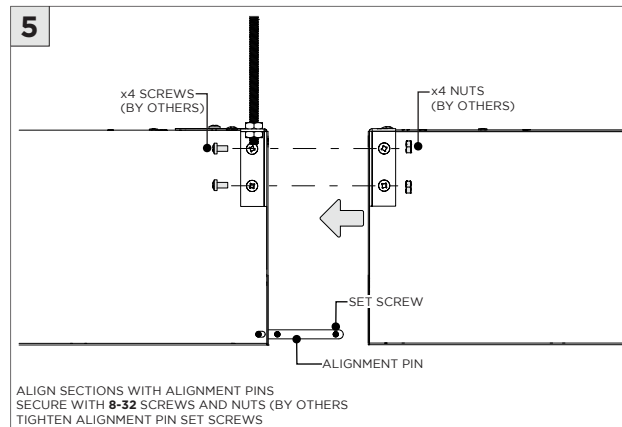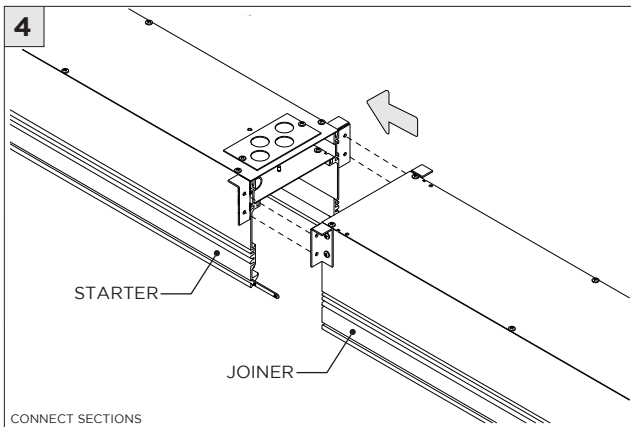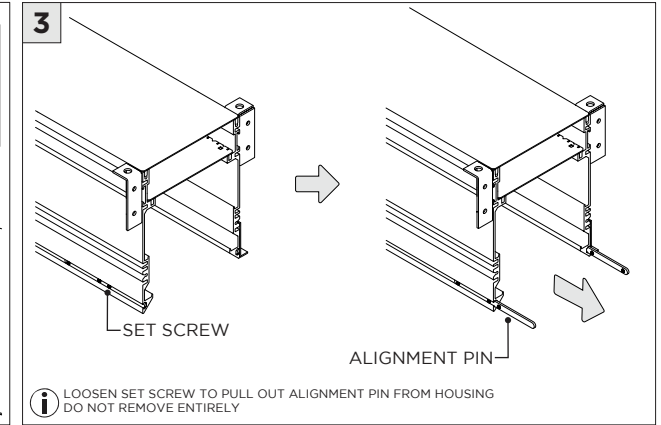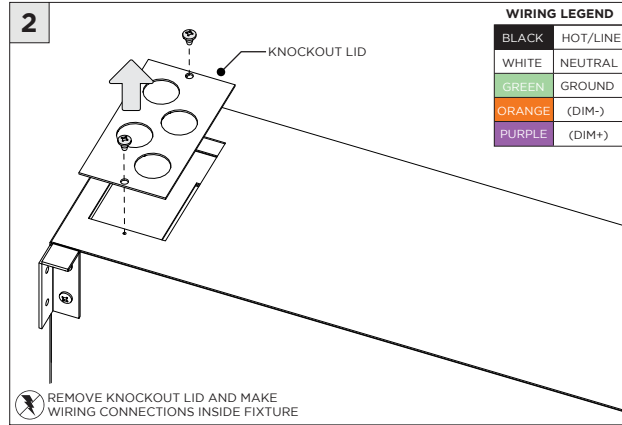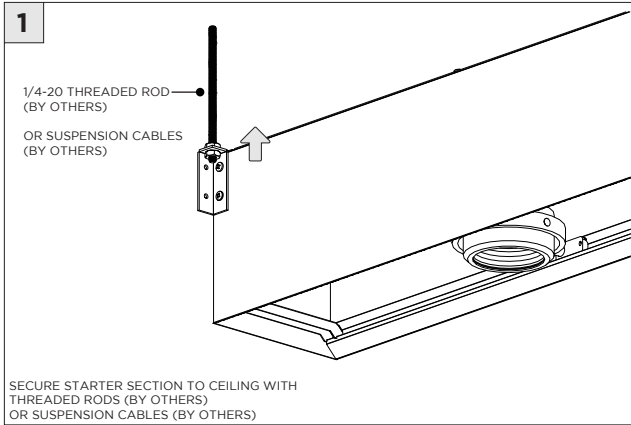

10

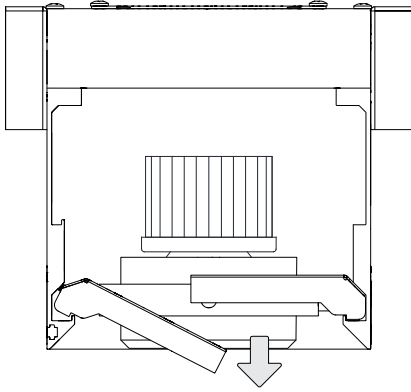


11

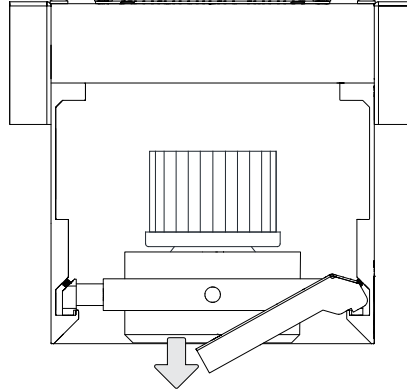


LED SERVICING - 48/58RMSL

1

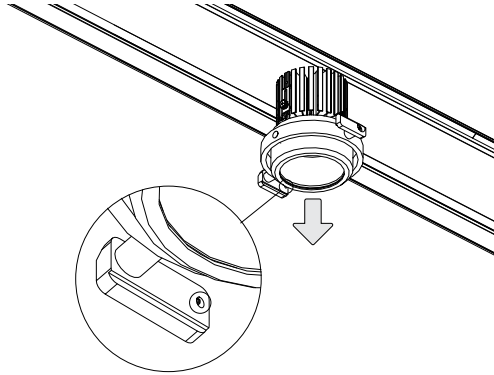


2

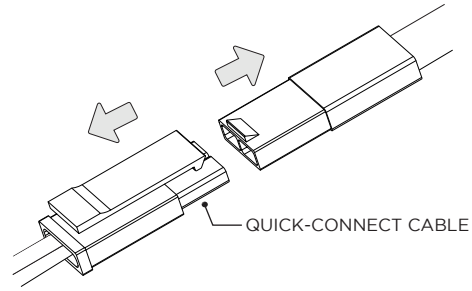


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3




4

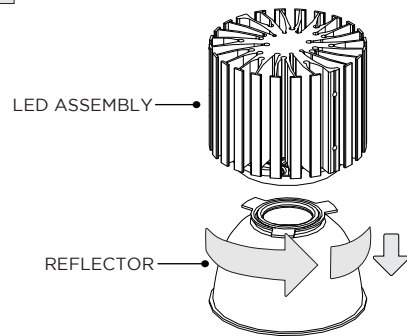


TWIST REFLECTOR TO REMOVE FROM LED ASSEMBLY

LED SERVICING - 38RMSL

1

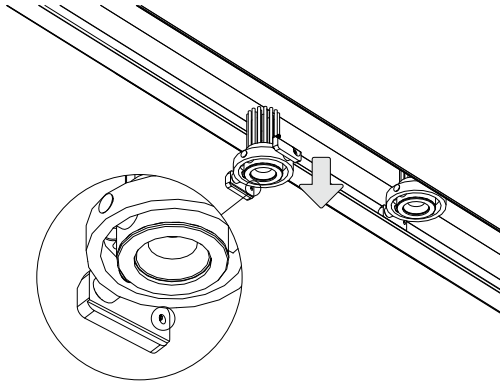


2

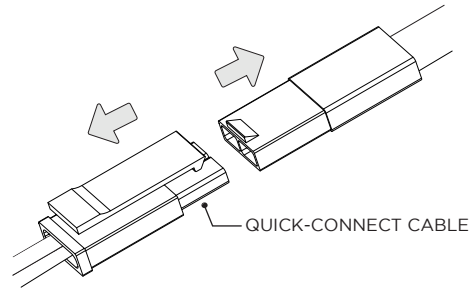


QUICK-CONNECT CABLE

DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

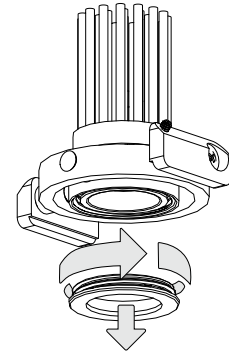

4

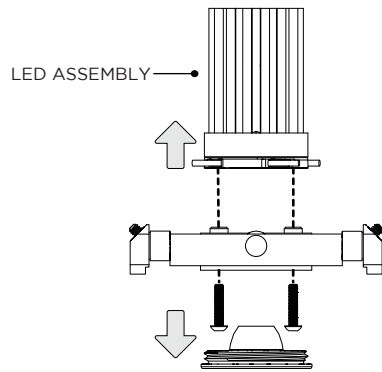

LED ASSEMBLY

DRIVER SERVICING - 38/48/58RMSL

