3.3" MICRO MADISON PENDANT


CABLE PENDANT MOUNT




ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

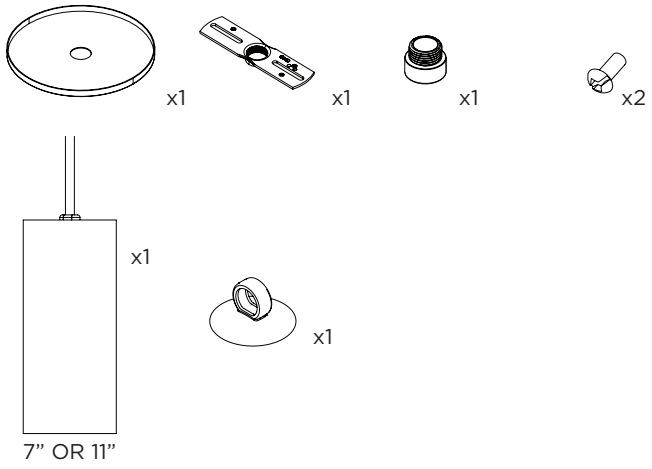


CONDUIT FEED CANOPY

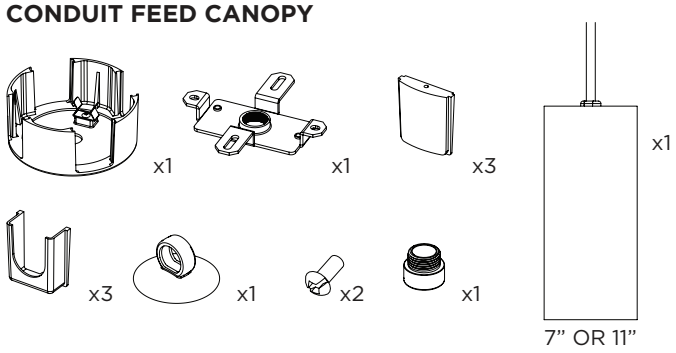

POWER CANOPY

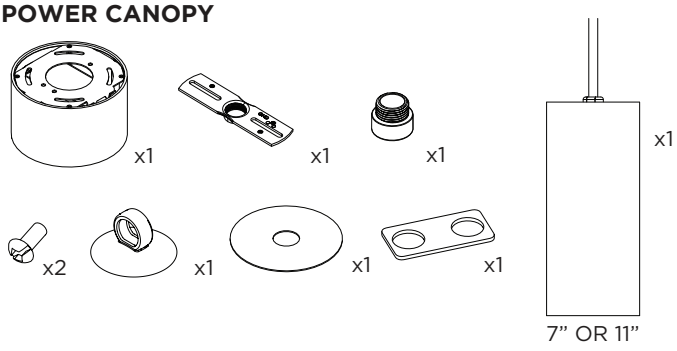


4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

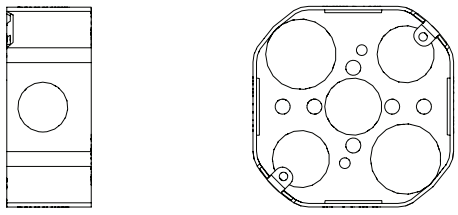


JUNCTION BOX (BY OTHERS)

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING


1

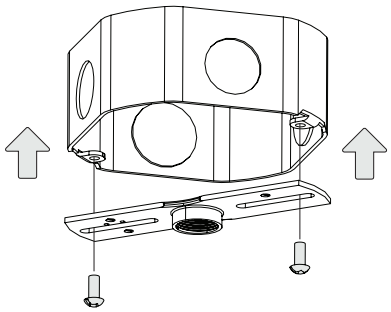


2

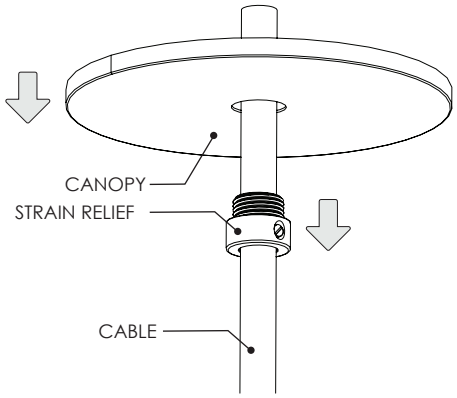

3A

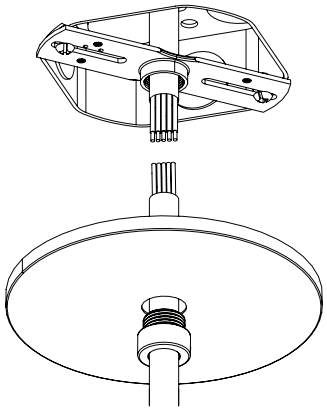

3B

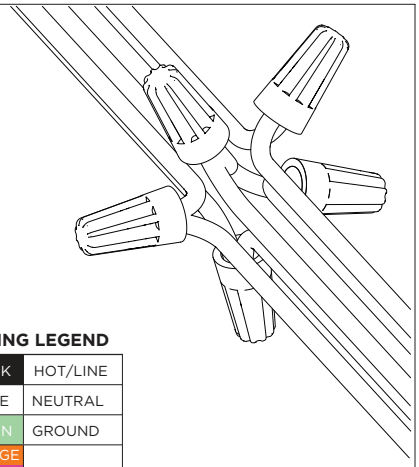


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

MAKE WIRING CONNECTIONS


4

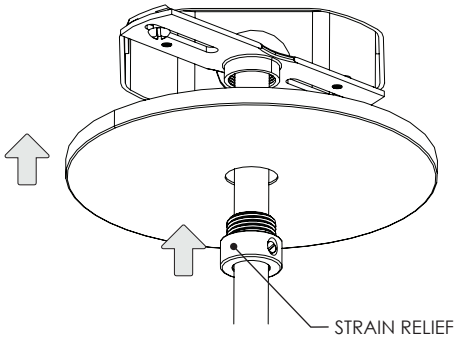

5

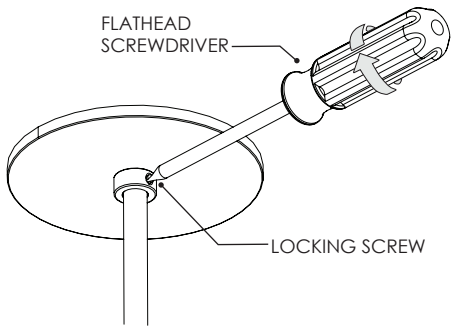

6

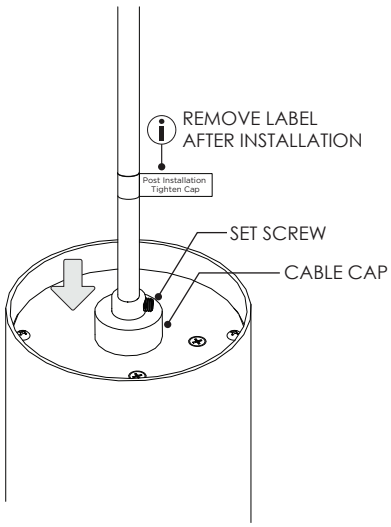


SECURE CABLE CAP WITH
SET SCREW AFTER INSTALLATION

3G LIGHTING


3.3" MICRO MADISON - PENDANT
CABLE PENDANT MOUNT

UNIVERSAL CONDUIT FEED CANOPY INSTALLATION
SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS


1

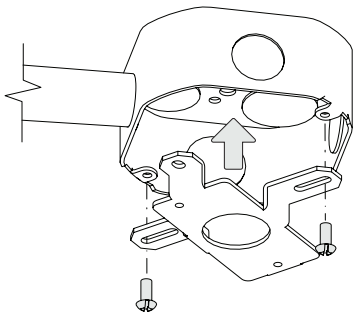

2

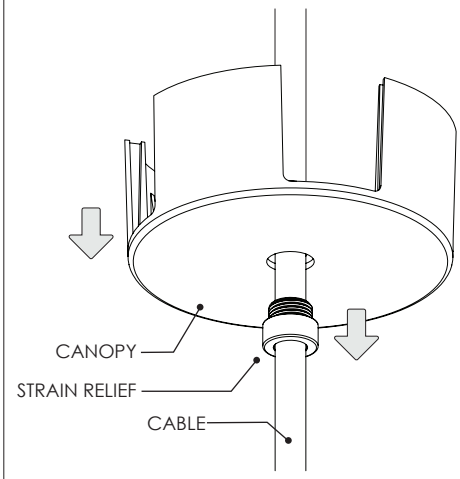


3A

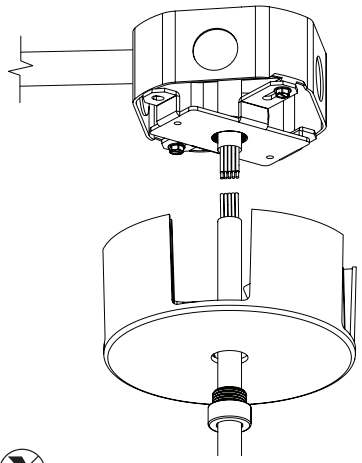

MAKE WIRING CONNECTIONS


3B

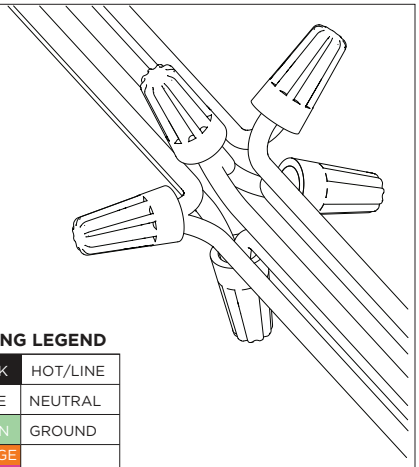


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

4

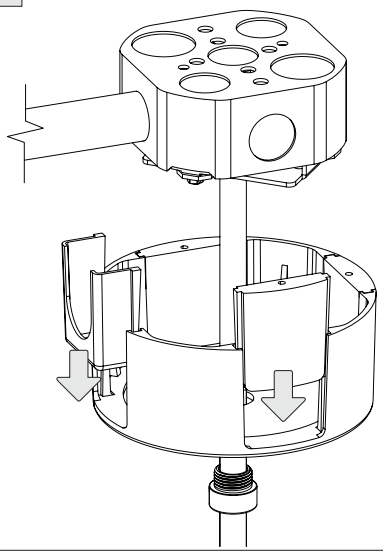


5A

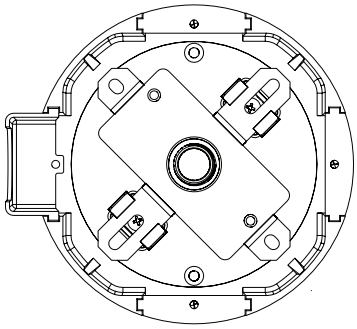


ENSURE CANOPY CLIPS ALIGN WITH BRACKET


5B

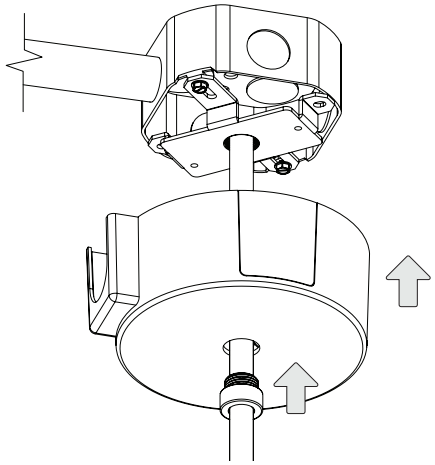

6

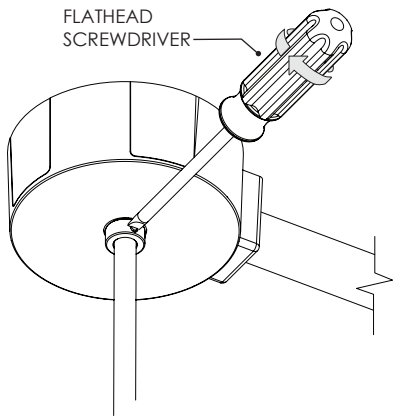


7

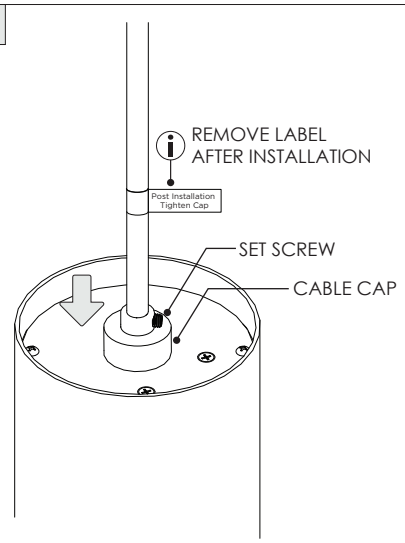


SECURE CABLE CAP WITH
SET SCREW AFTER INSTALLATION

1

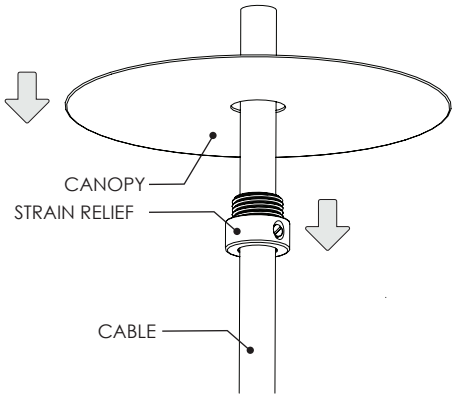

2

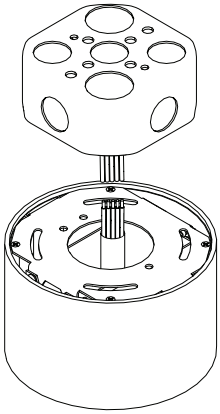


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

MAKE WIRING CONNECTIONS

3

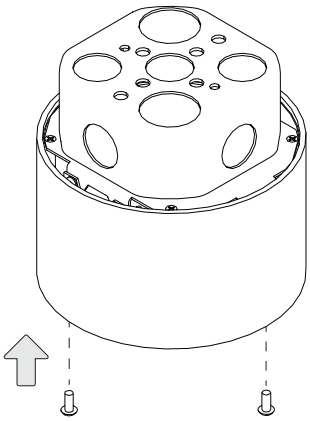


4

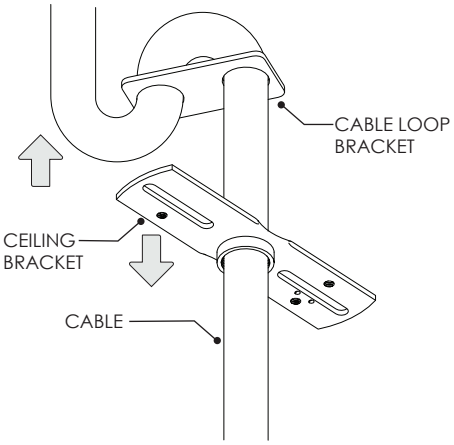


FEED CEILING BRACKET THROUGH CABLE
SET CABLE TO DESIRED LENGTH
WITH CABLE LOOP BRACKET

5

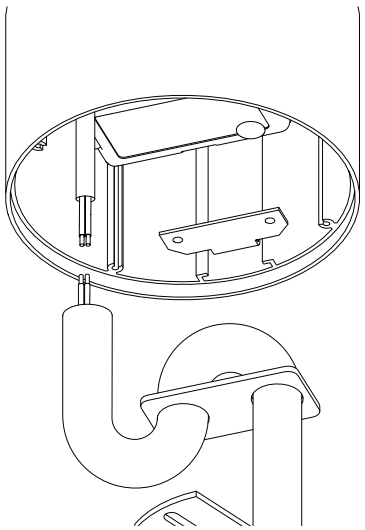


MAKE WIRING CONNECTIONS


6

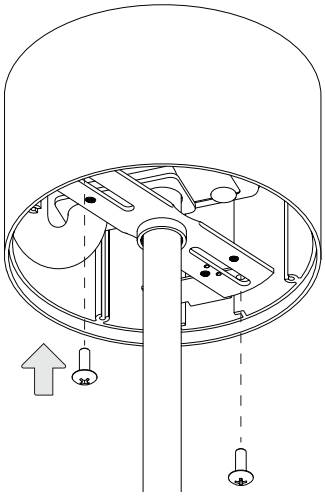


7

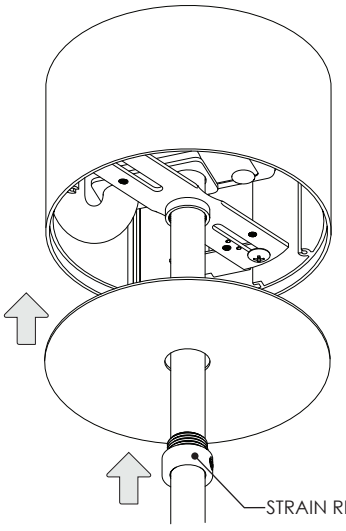

8

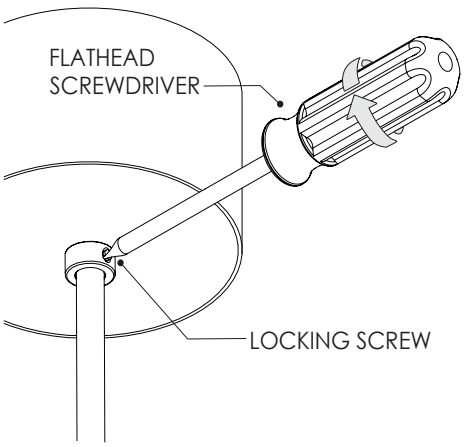

9

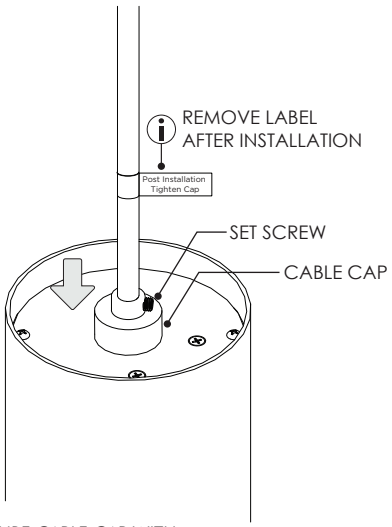


SECURE CABLE CAP WITH
SET SCREW AFTER INSTALLATION

3G LIGHTING


3.3" MICRO MADISON - PENDANT
CABLE PENDANT MOUNT

UNIVERSAL CONDUIT FEED CANOPY + POWER CANOPY INSTALLATION
SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS


1 CONDUIT FEED CANOPY

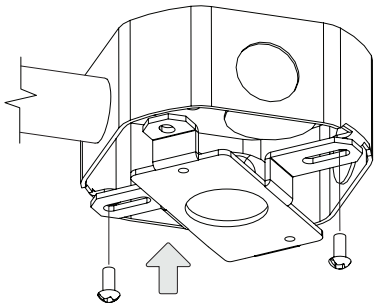

2

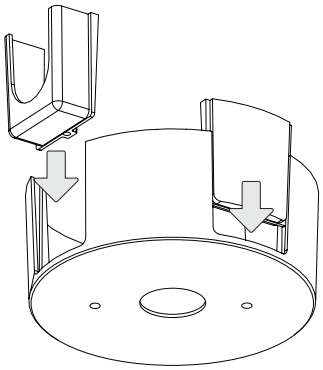


3

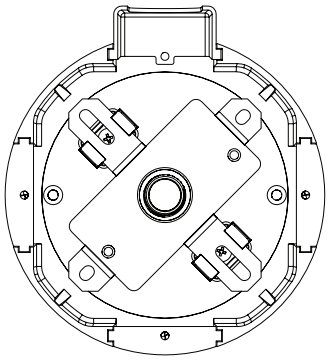


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

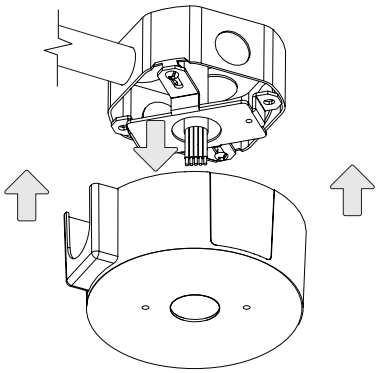


CONNECT CANDUIT CANOPY AND FEED JUNCTION BOX WIRES THROUGH HOLE

5

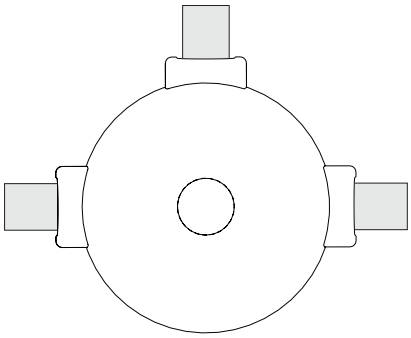

CANOPY IS SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

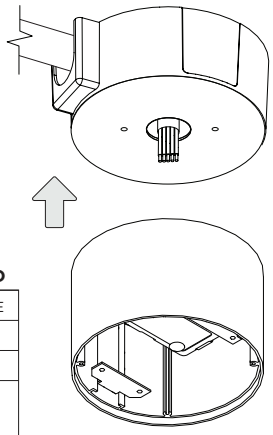


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

MAKE WIRING CONNECTIONS


7

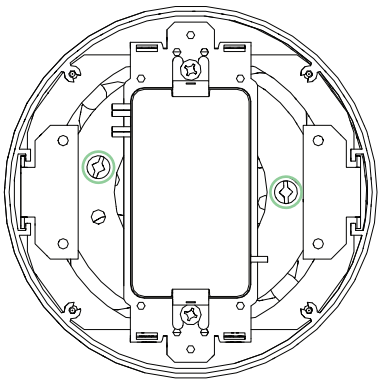


8

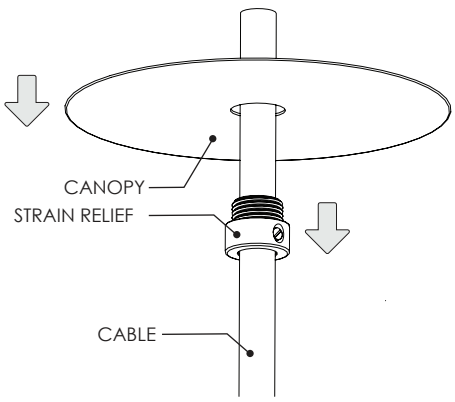

9

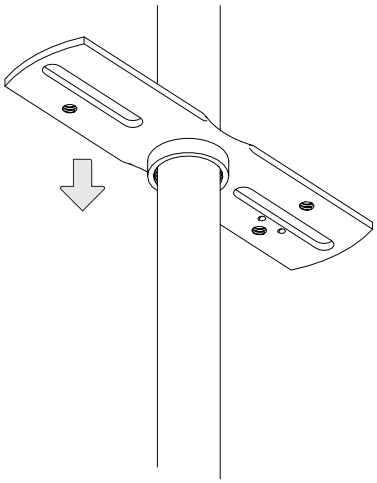


10

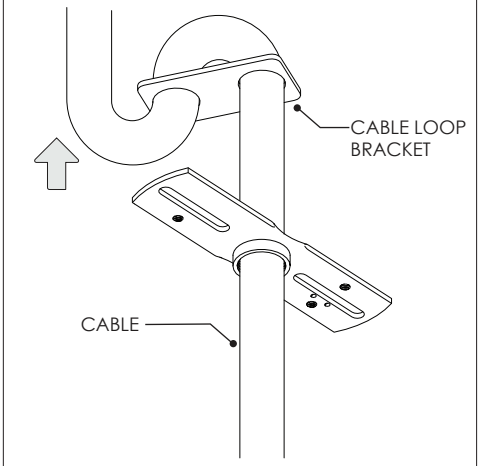


SET CABLE TO DESIRED LENGTH WITH CABLE LOOP BRACKET

11

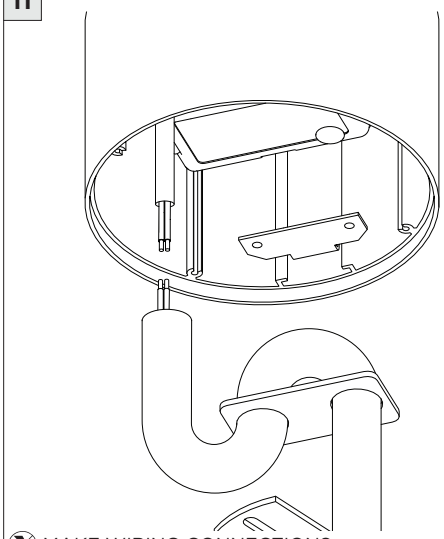


MAKE WIRING CONNECTIONS


12

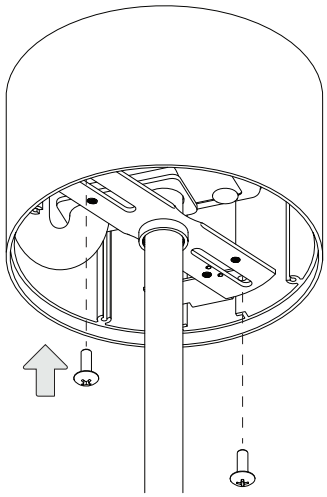


13

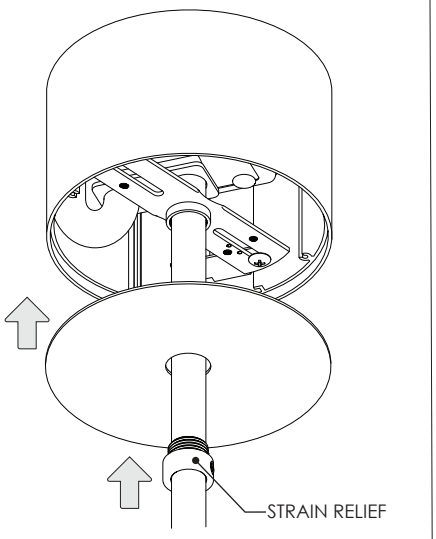

14

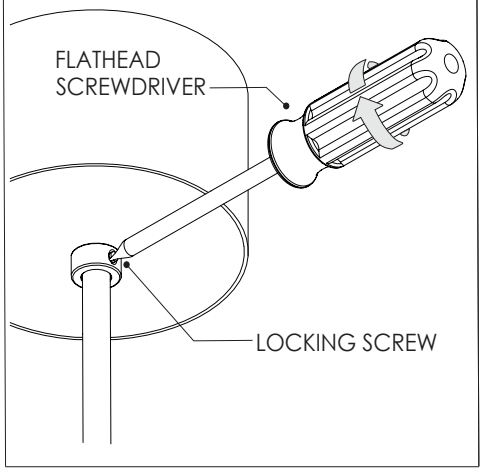


15

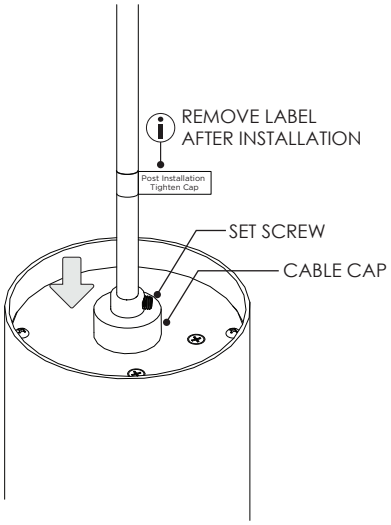


SECURE CABLE CAP WITH SET SCREW AFTER INSTALLATION

DRIVER SERVICING

1A

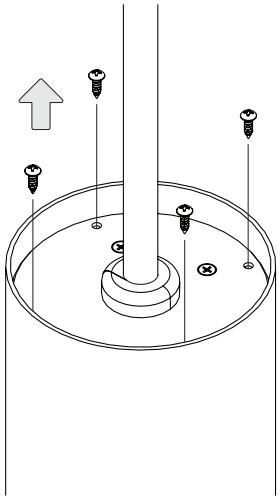


2

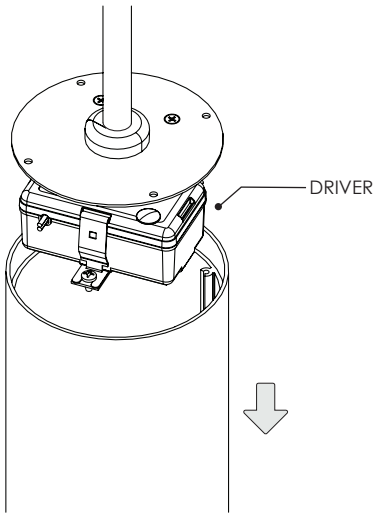


LED SERVICING


1

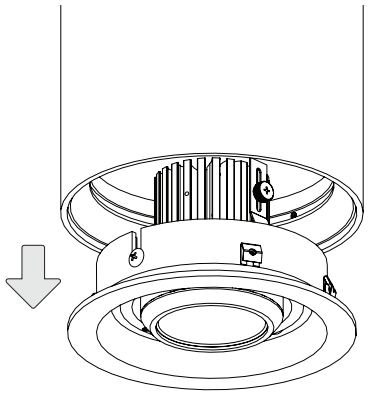

2

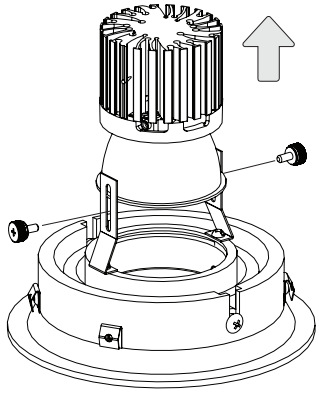


3

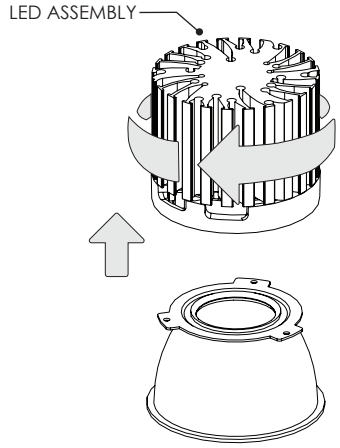


DRIVER SERVICING


1

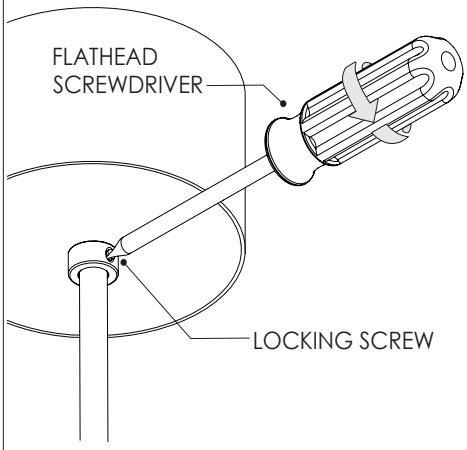


2

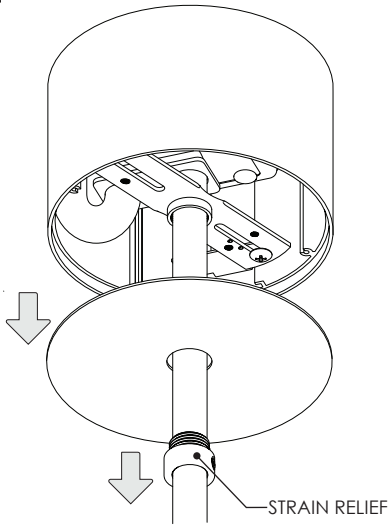

3

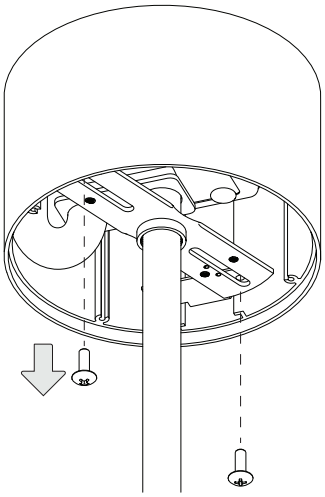

4

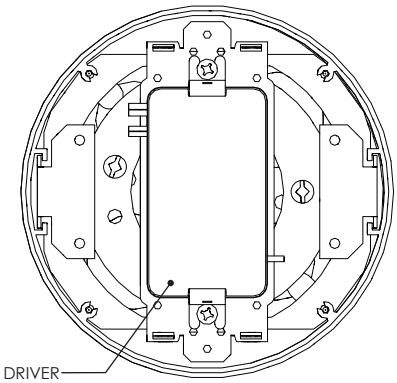


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

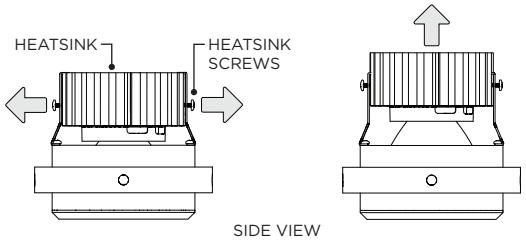


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR OPTICAL ACCESSORY CLEARANCE

2

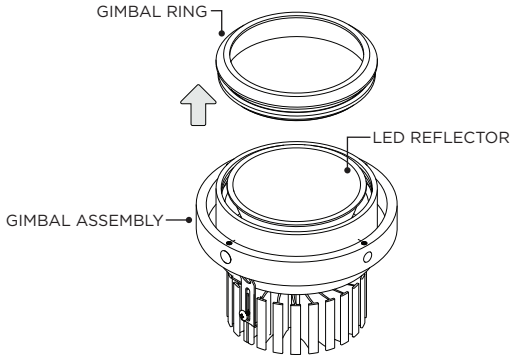


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

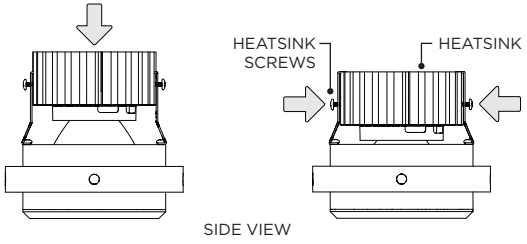

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS