3.3" MICRO MADISON PENDANT


STEM PENDANT MOUNT




ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

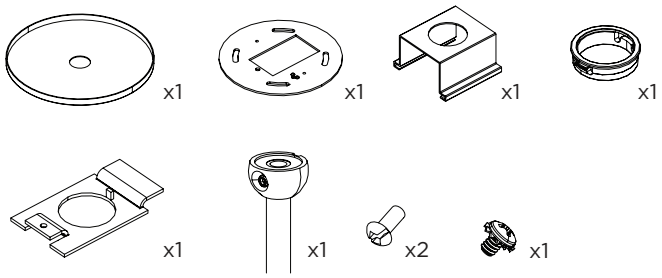


CONDUIT FEED CANOPY

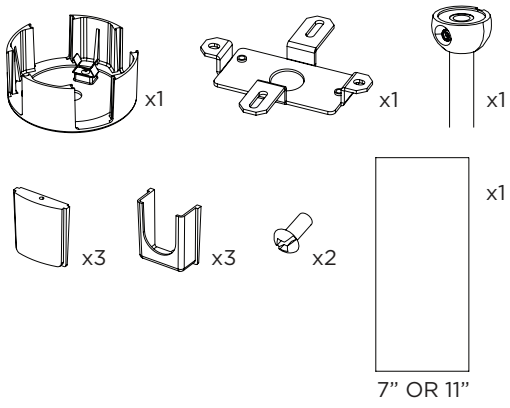

POWER CANOPY

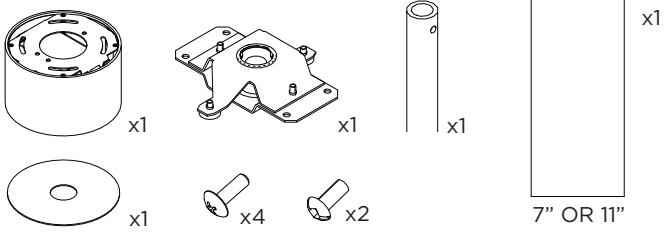


4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

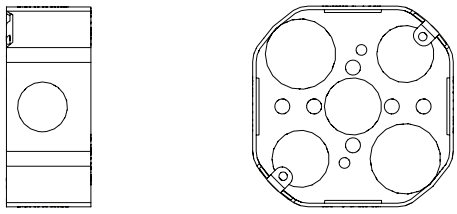


JUNCTION BOX (BY OTHERS)

SUITABLE FOR SLOPED CEILING

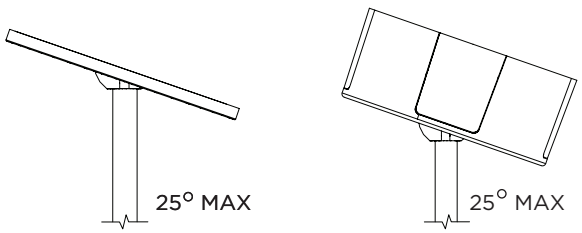


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING


1A

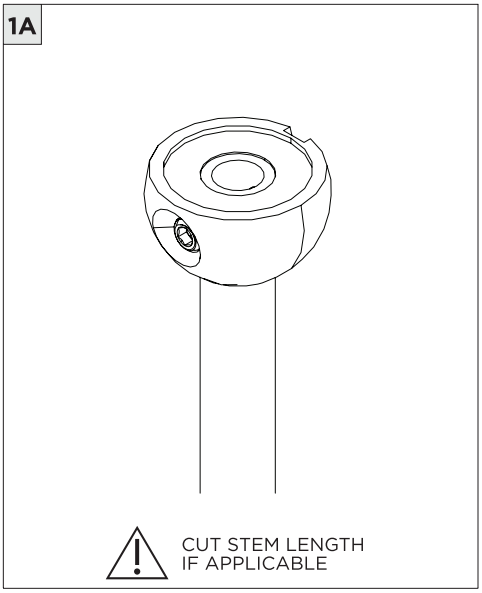


1B

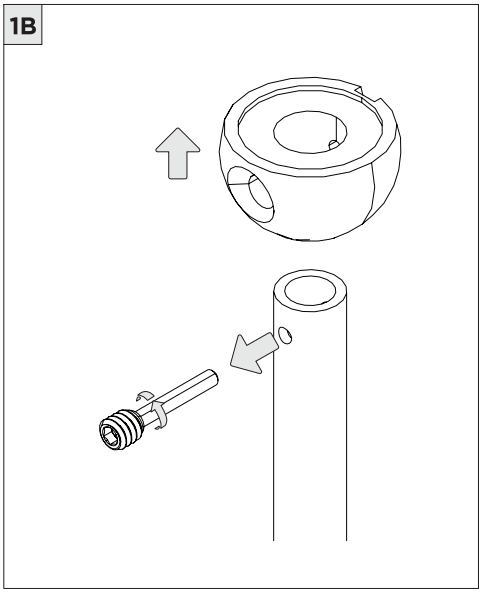


1C

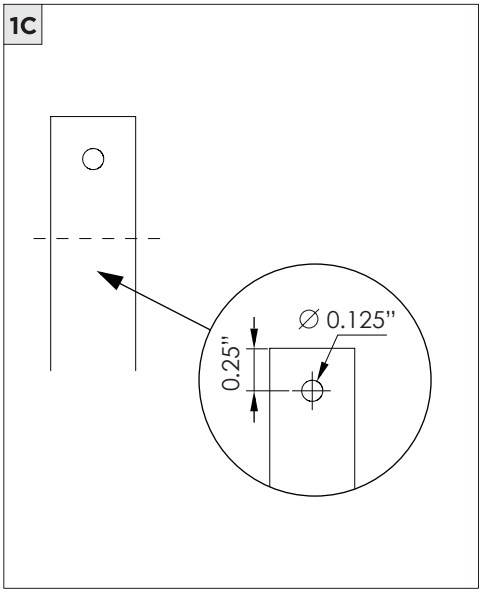


2

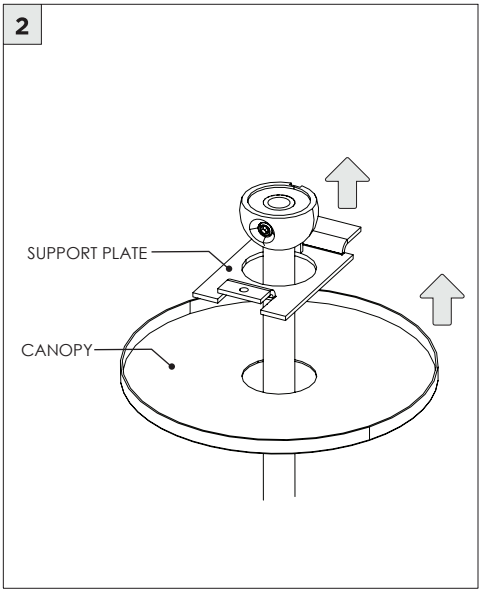


3

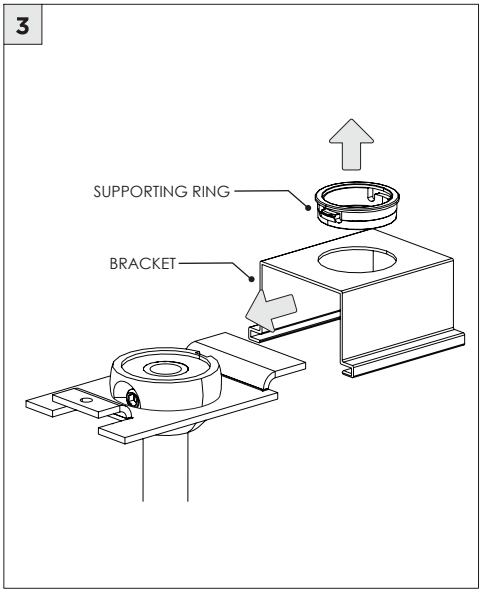


4A

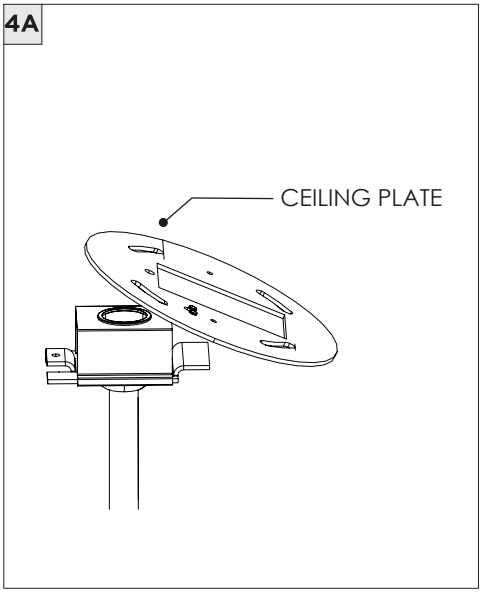


4B

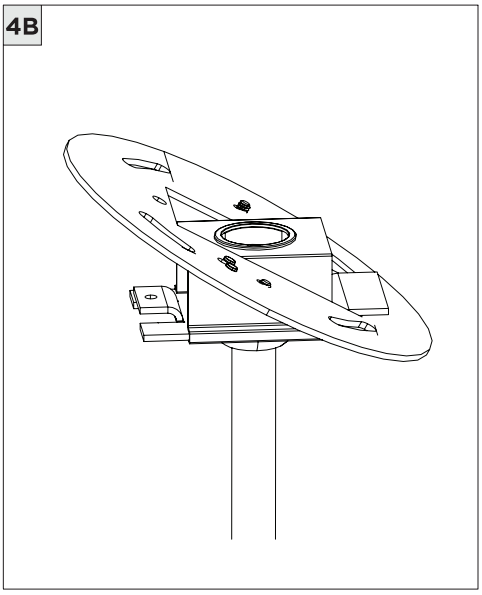


4C

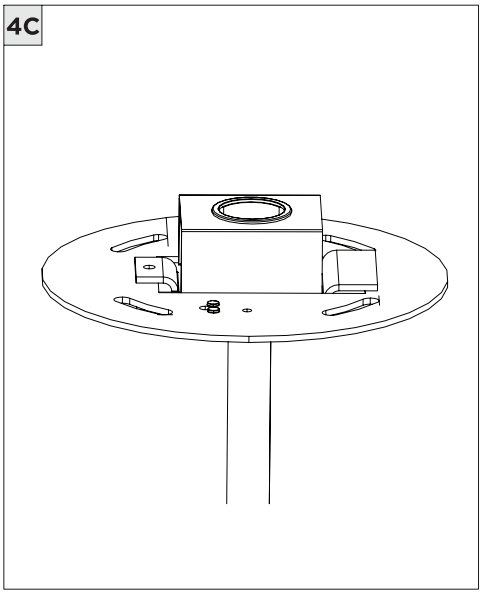


5

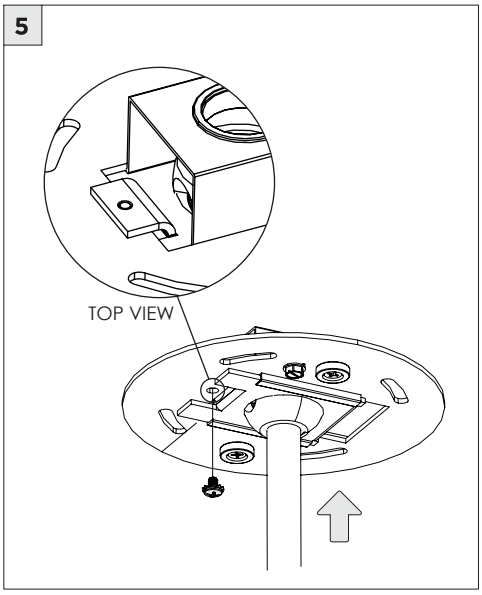

6A

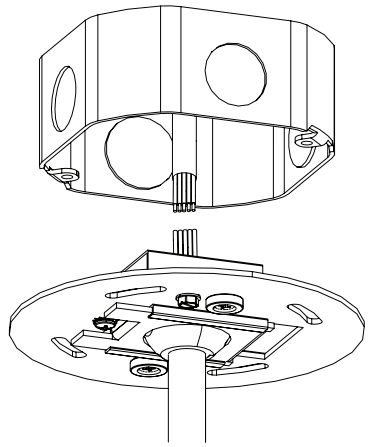

6B

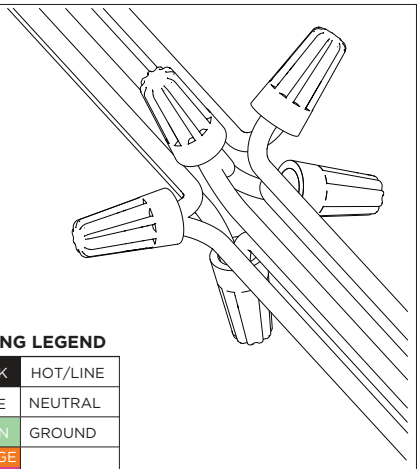


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

MAKE WIRING CONNECTIONS

7

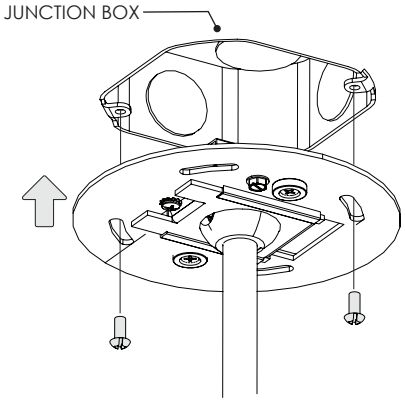

8

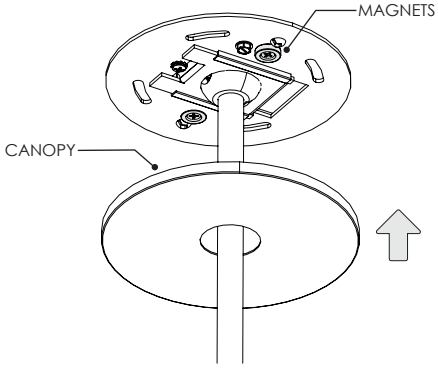


3G LIGHTING

3.3" MICRO MADISON - PENDANT
STEM PENDANT MOUNT


UNIVERSAL CONDUIT FEED CANOPY INSTALLATION
SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS

1A

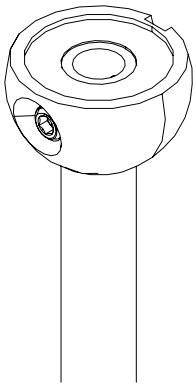


CUT STEM LENGTH IF APPLICABLE


1B

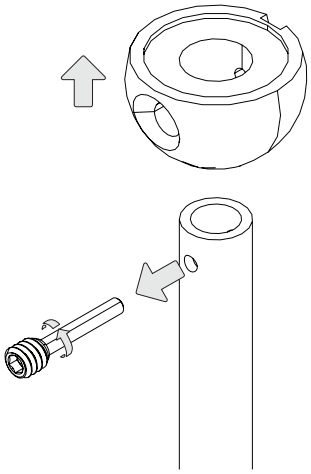


1C

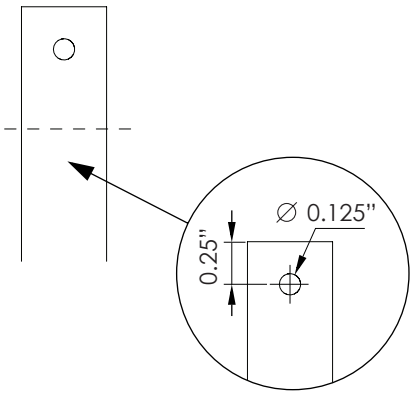


2

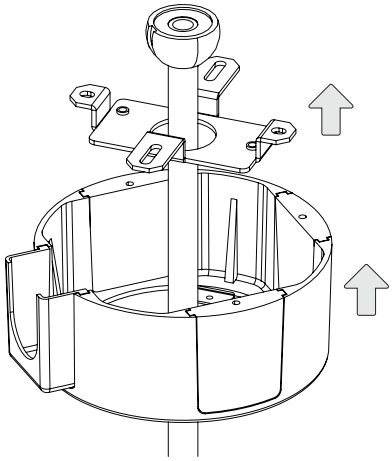

3A

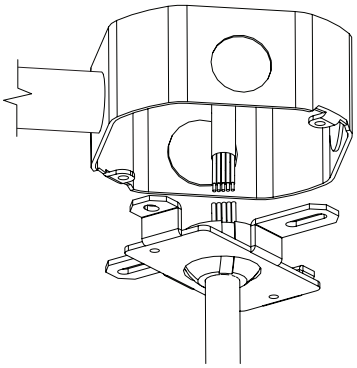

3B

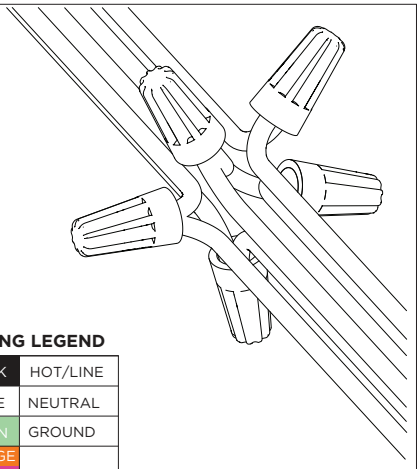


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)


MAKE WIRING CONNECTIONS

4

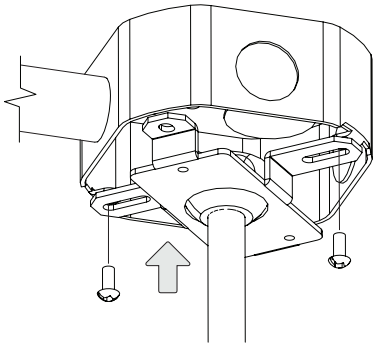


ENSURE BRACKET ORIENTATION MATCHES CONDUIT FEED REQUIREMENT

5

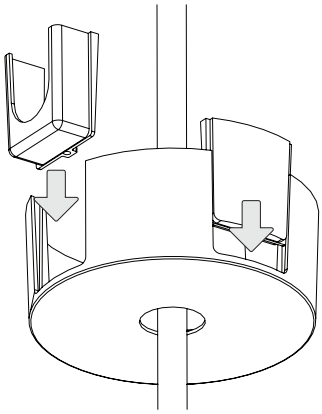



6A

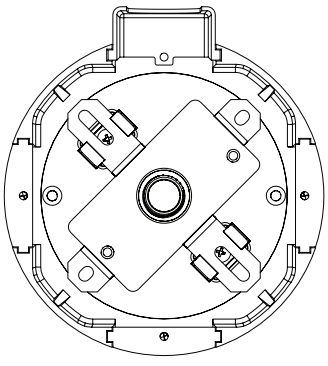


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

6B

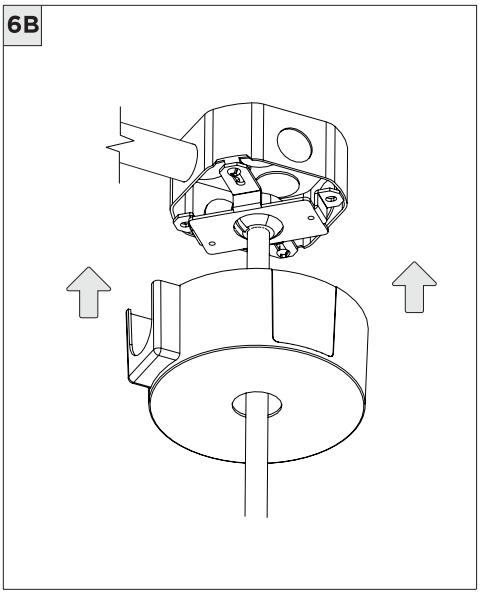

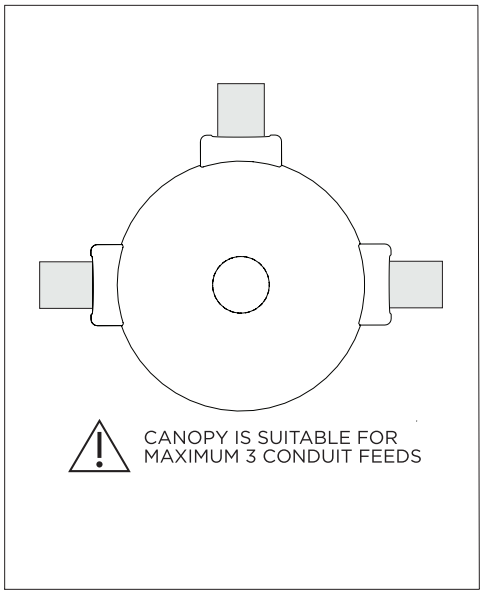


1

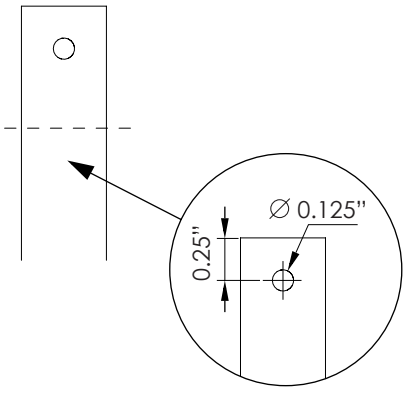


CUT STEM LENGTH IF APPLICABLE

2

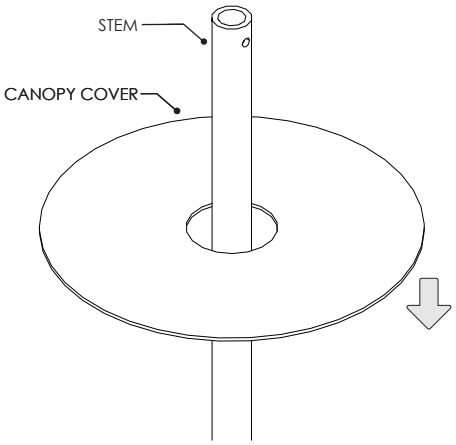

3

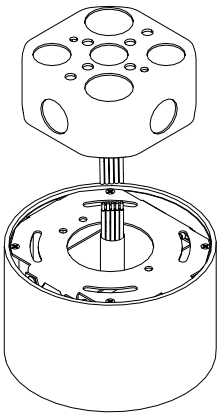


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

MAKE WIRING CONNECTIONS


4

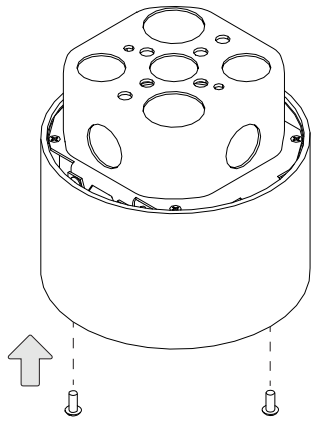


5

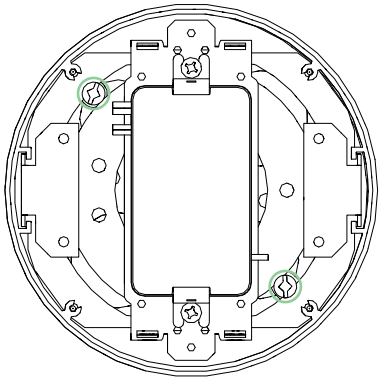

6

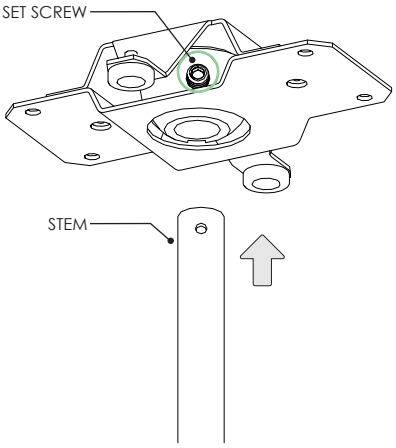


7

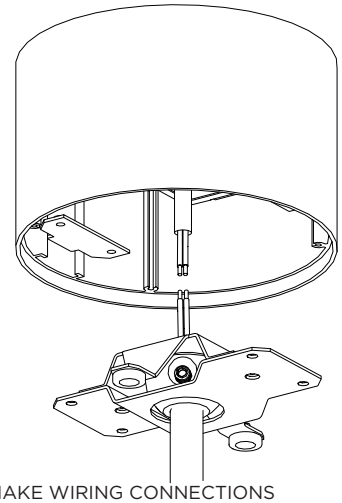


MAKE WIRING CONNECTIONS

8

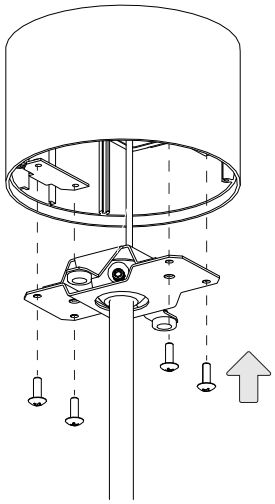

9

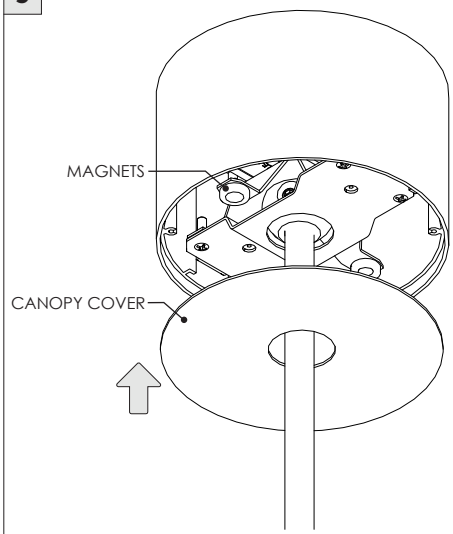


3G LIGHTING


3.3" MICRO MADISON - PENDANT
STEM PENDANT MOUNT

UNIVERSAL CONDUIT FEED CANOPY + POWER CANOP INSTALLATION
SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS


1 CONDUIT FEED CANOPY

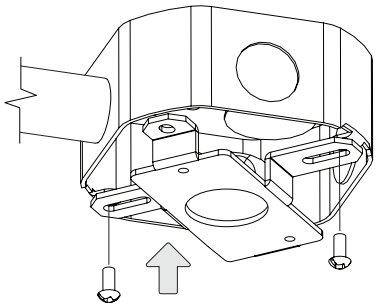

2

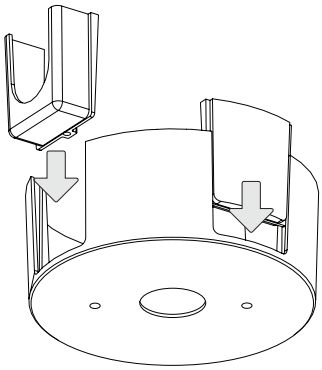


3

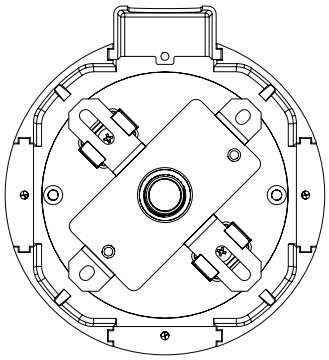


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

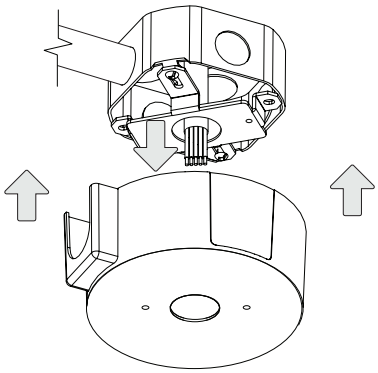


CONNECT CANDUIT CANOPY AND FEED JUNCTION BOX WIRES THROUGH HOLE

5

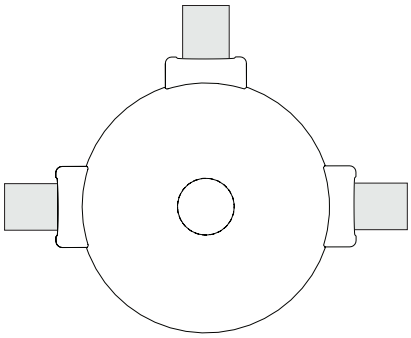

CANOPY IS SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

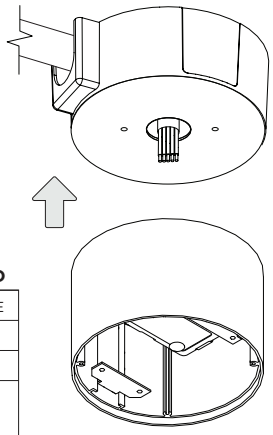


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE OR PINK OR BLUE	(DIM-)
PURPLE OR RED	(DIM+)

MAKE WIRING CONNECTIONS

7

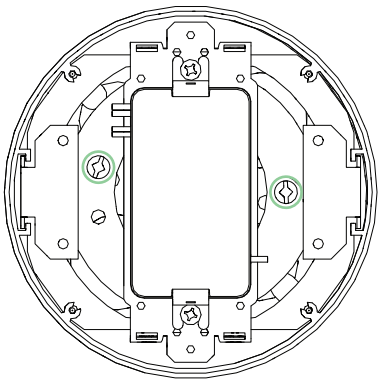


8

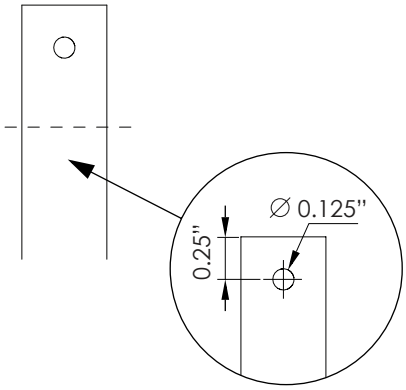


CUT STEM LENGTH IF APPLICABLE


9

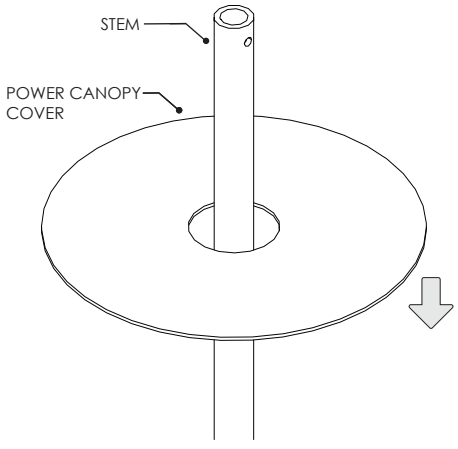


10

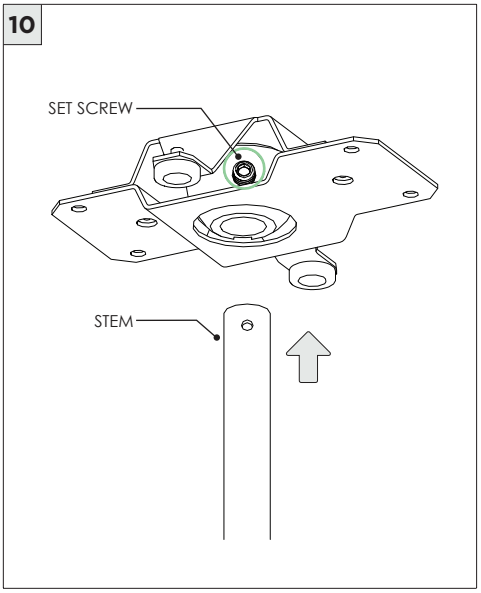
SET SCREW
STEM


11

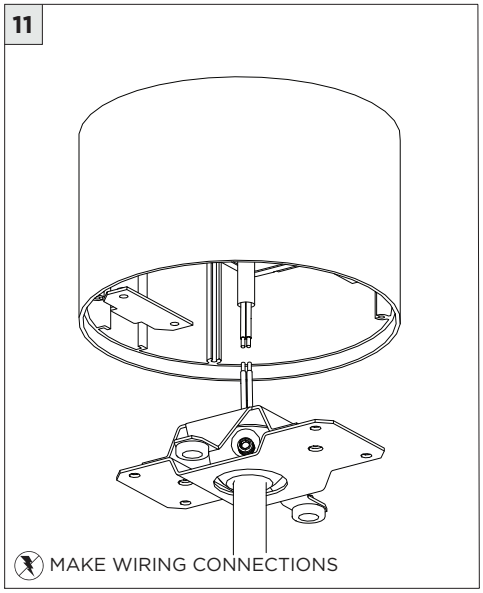
MAKE WIRING CONNECTIONS

12

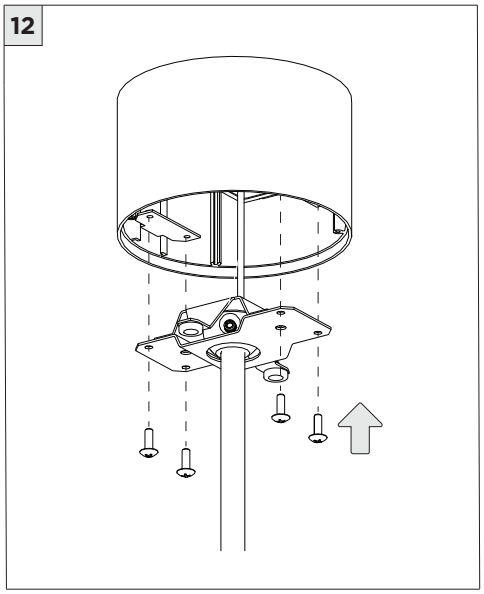


13

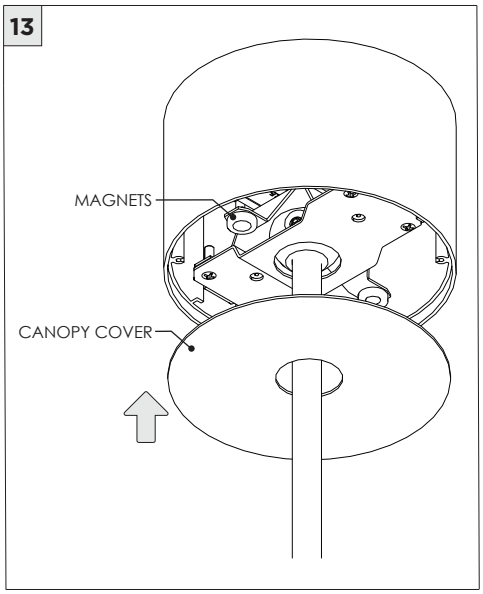

MAGNETS
CANOPY COVER

DRIVER SERVICING

1

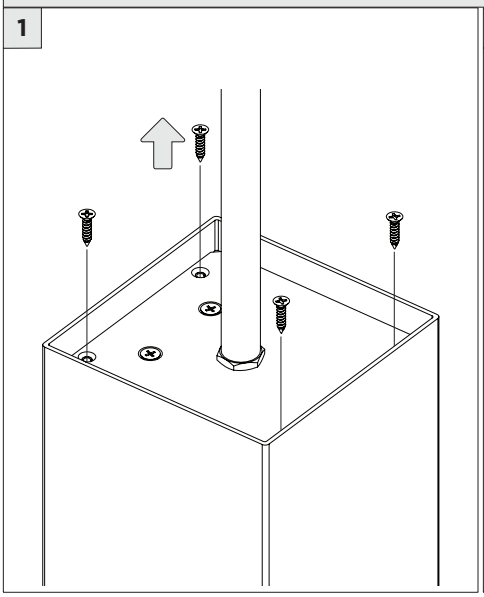


2

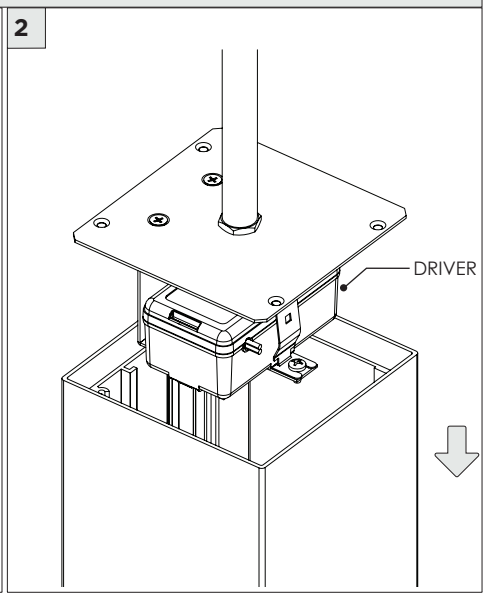


LED SERVICING


1

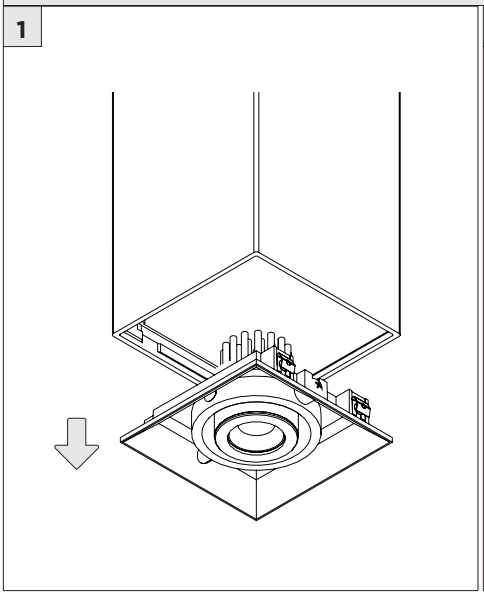

2

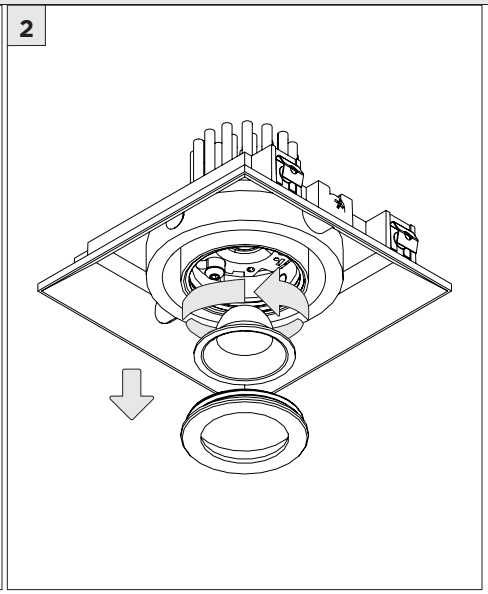


3

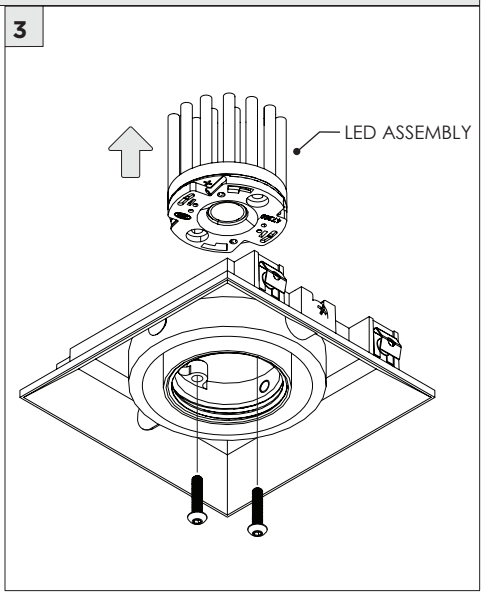


DRIVER SERVICING


1

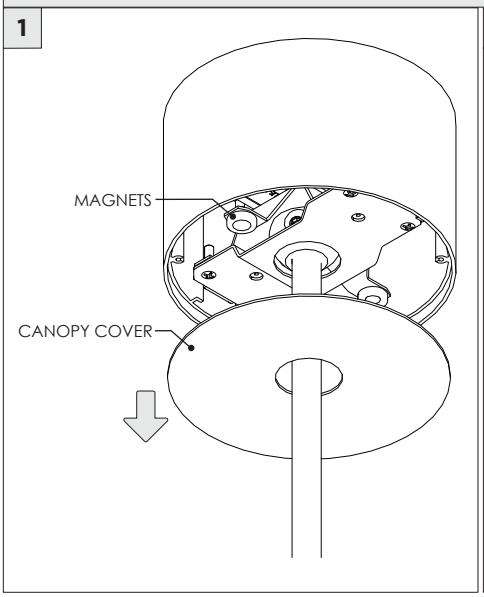

2

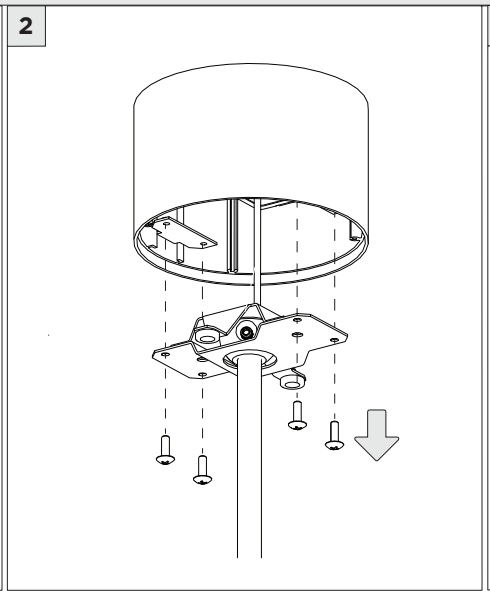

3

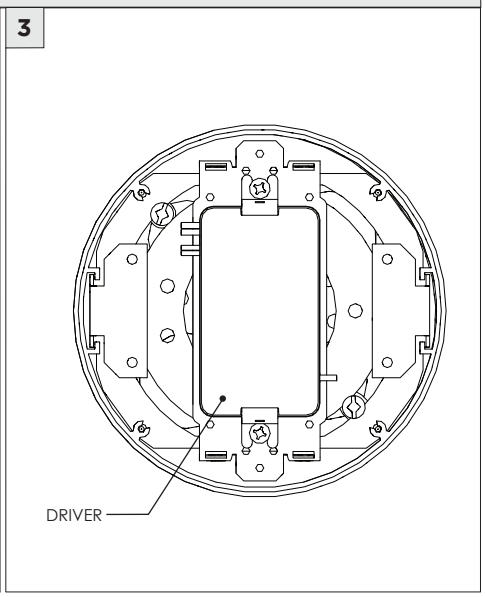


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

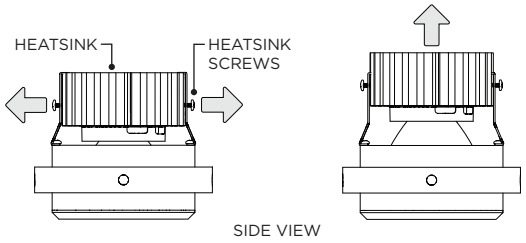


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR OPTICAL ACCESSORY CLEARANCE

2

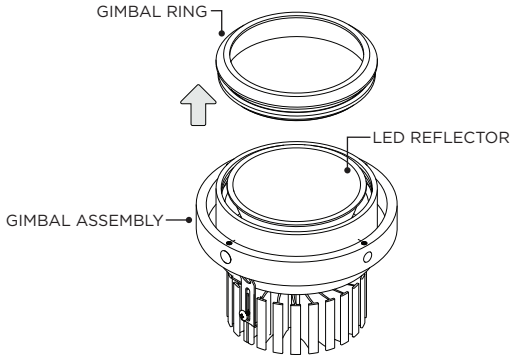


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

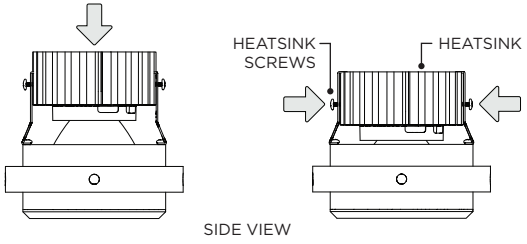

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS