


3.3" DOWNLIGHT CYLINDER

SURFACE MOUNT




COMPONENTS



STANDARD CANOPY

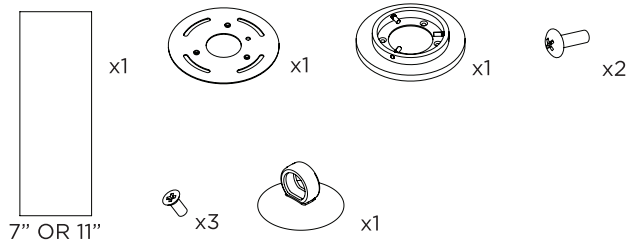


CONDUIT FEED CANOPY

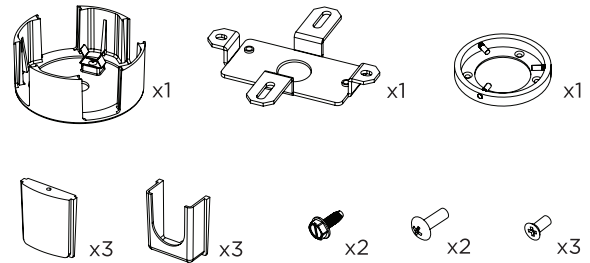

SEAMLESS CANOPY (FOR NEW CONSTRUCTION ONLY)

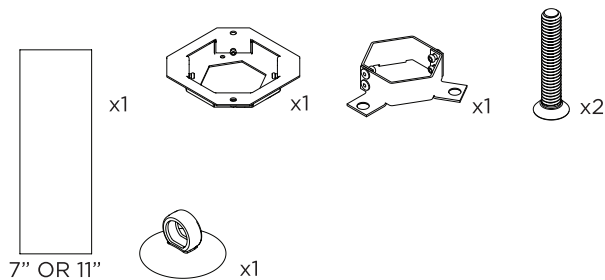

4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

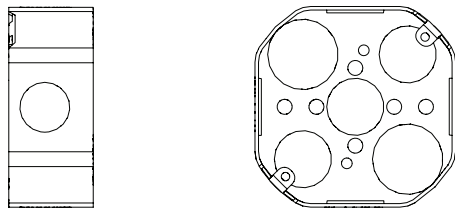







JUNCTION BOX (BY OTHERS)








INSTRUCTION KEY










INFORMATION


- ADDITIONAL
- ATTENTION
- POWER ON
- POWER OFF

INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
TURN OFF POWER DURING INSTALLATION OR SERVICING

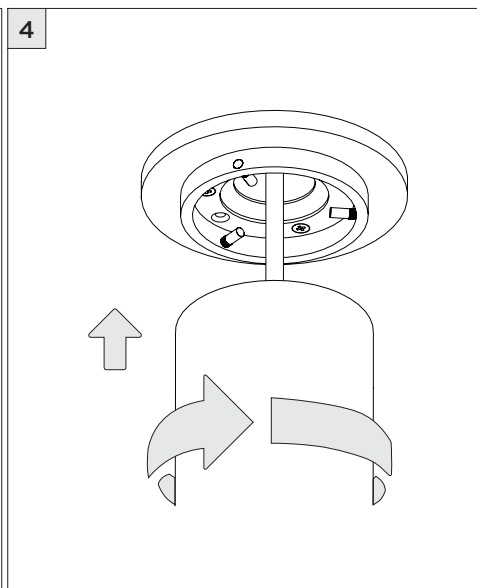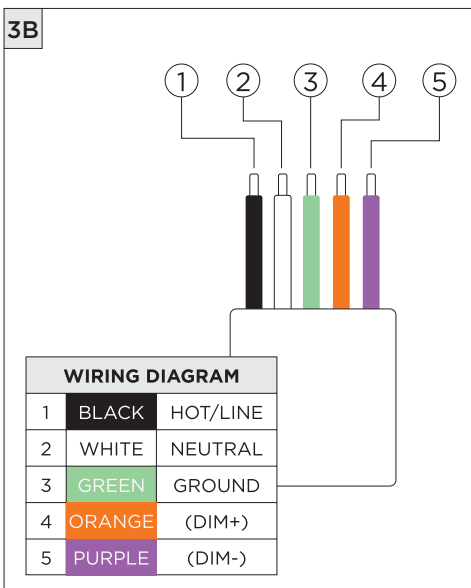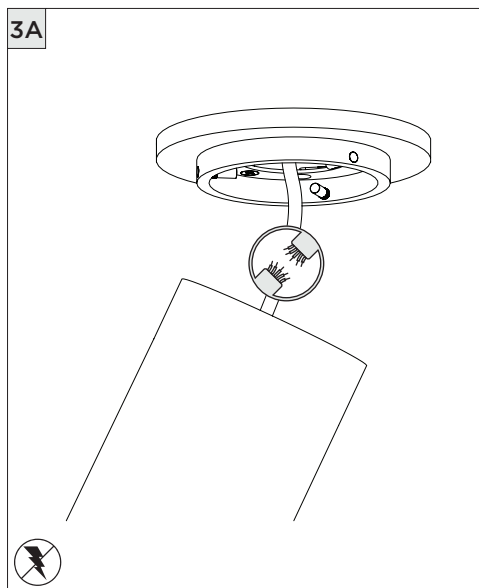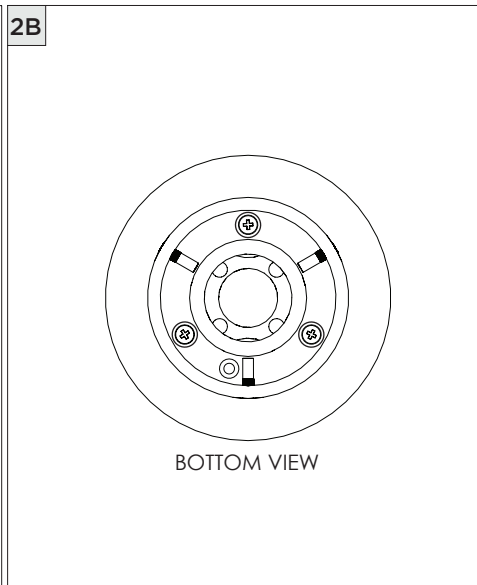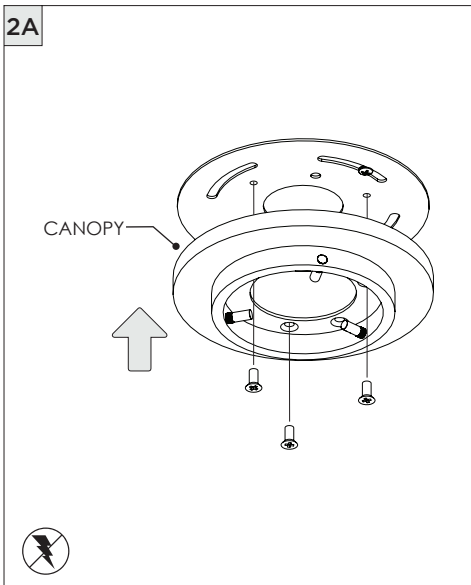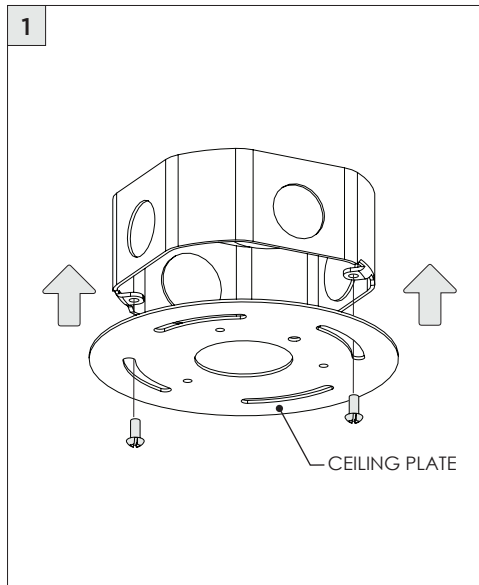

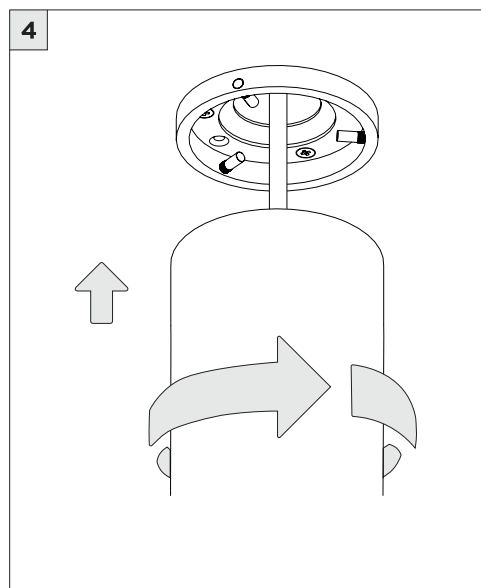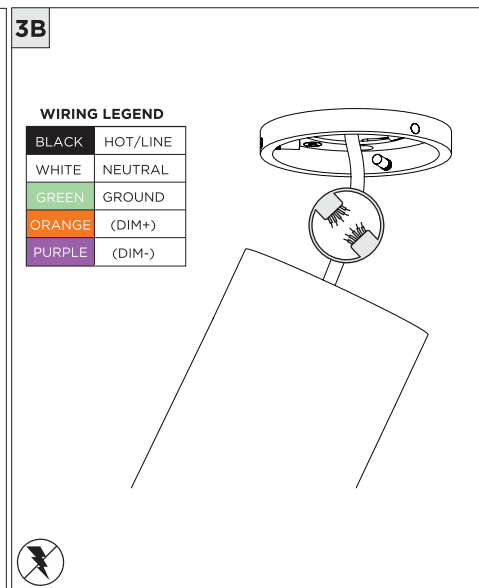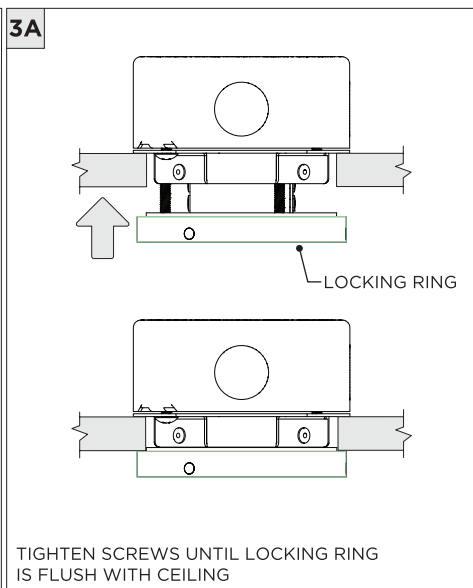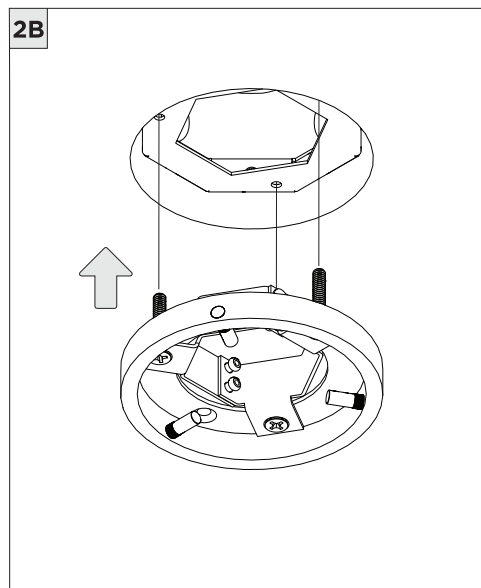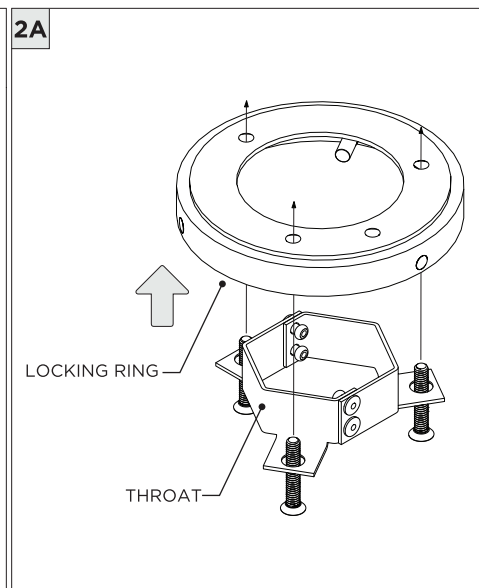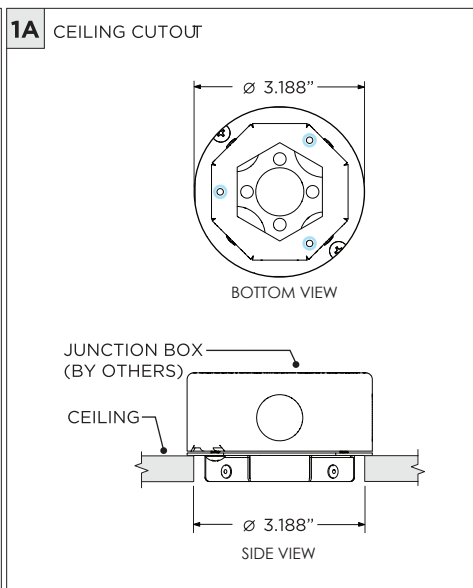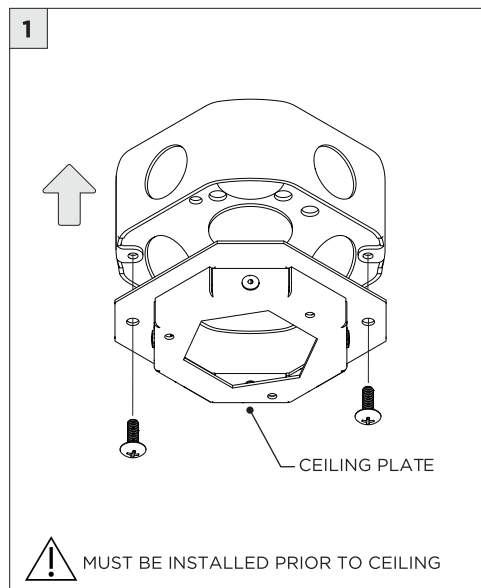


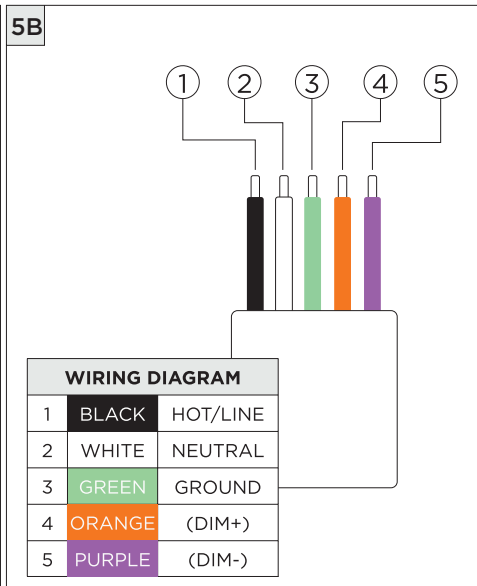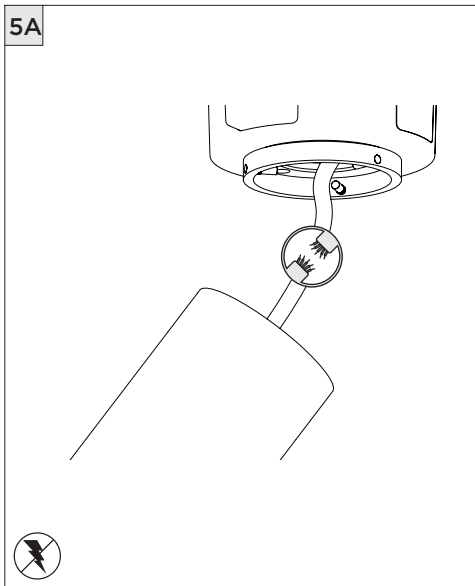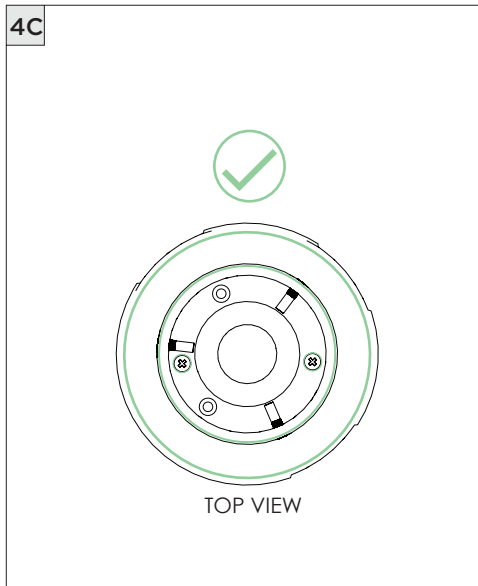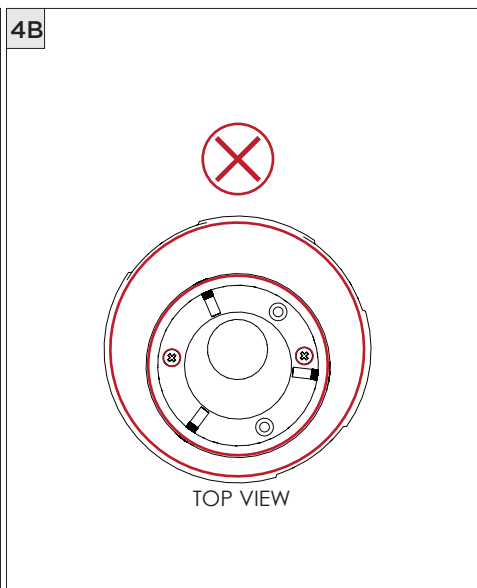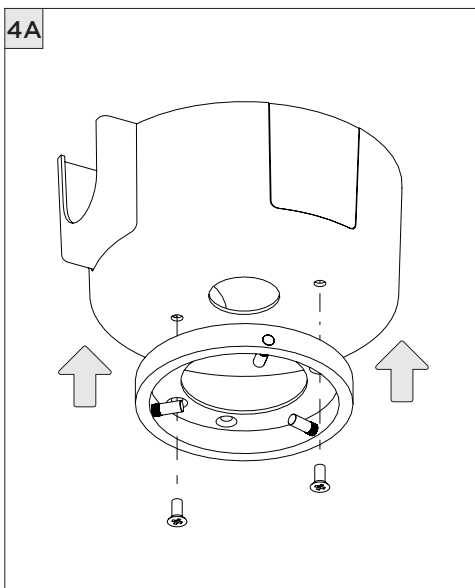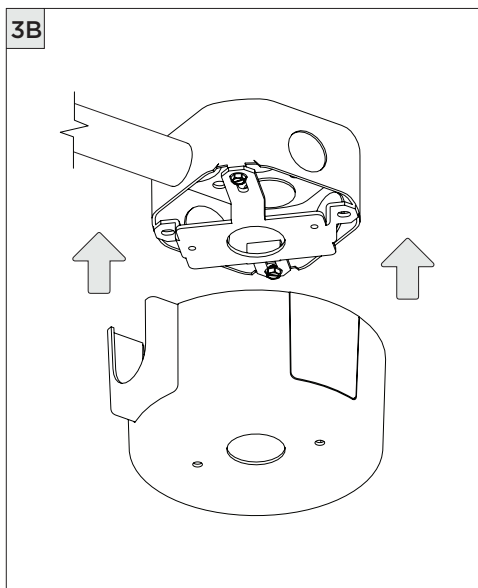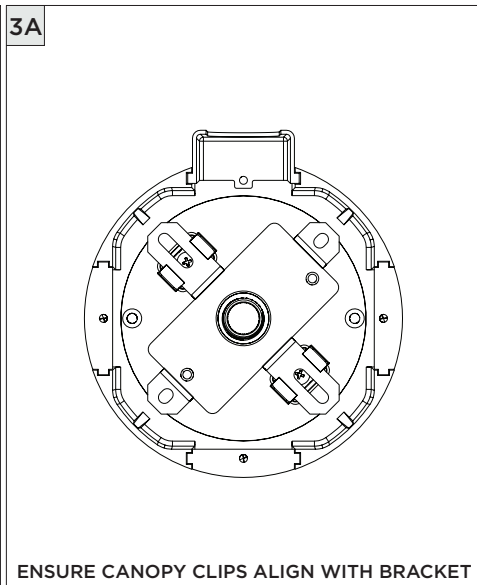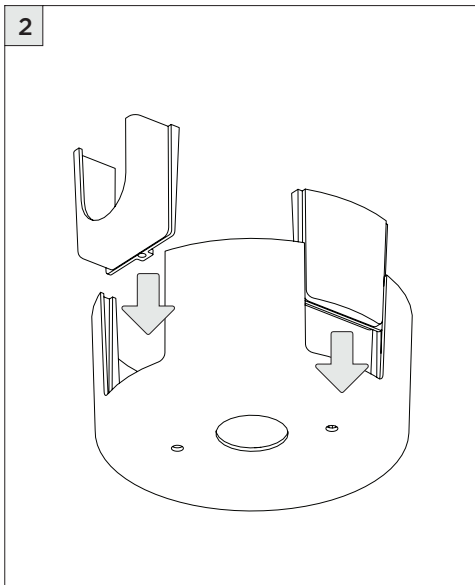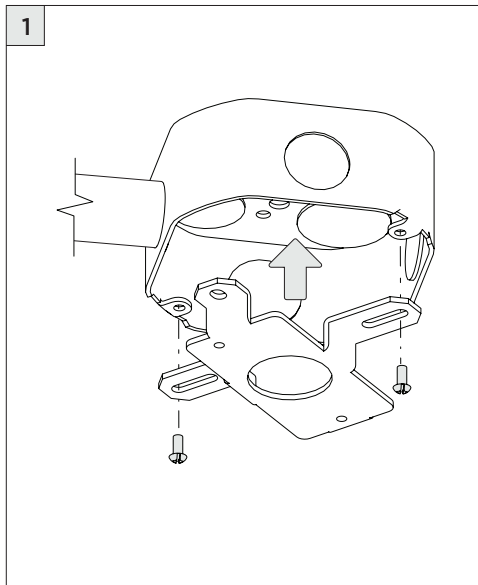

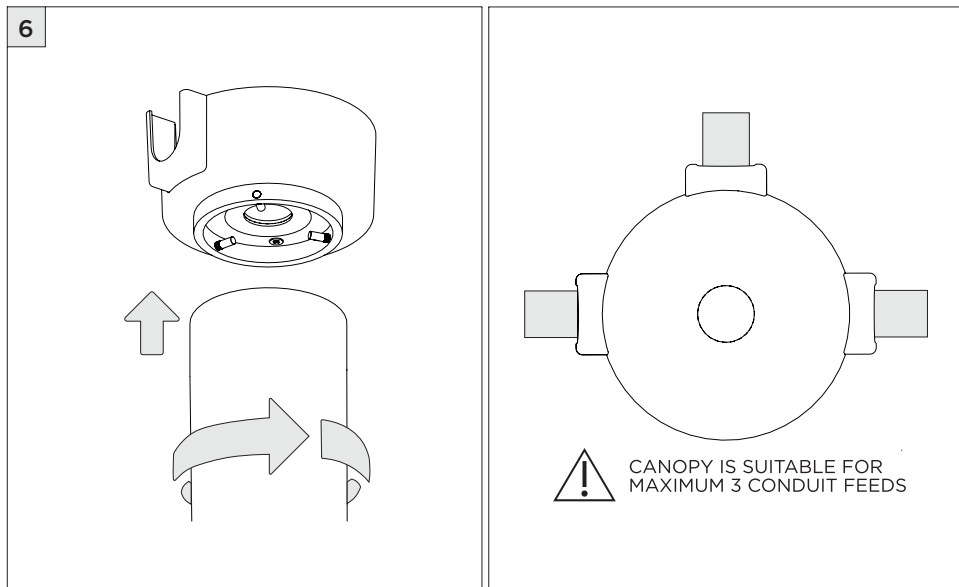


DRIVER SERVICING


1

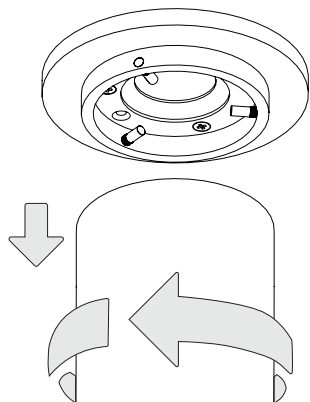

2

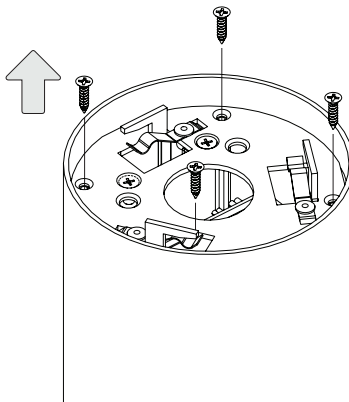


3

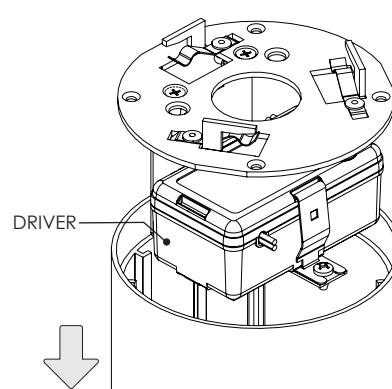


LED SERVICING

1

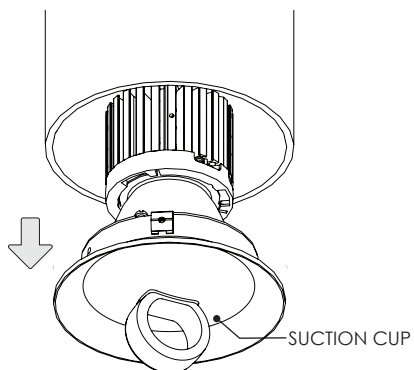


REPEAT DRIVER SERVICING STEPS
DISCONNECT LED WIRES AND REMOVE LED INSERT

2

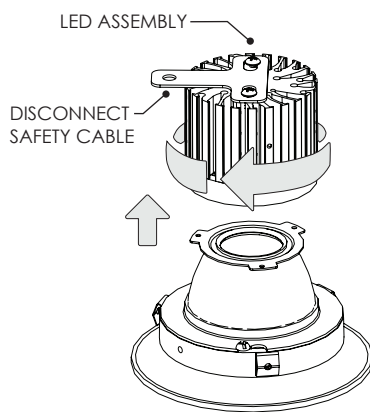


DRIVER SERVICING


1

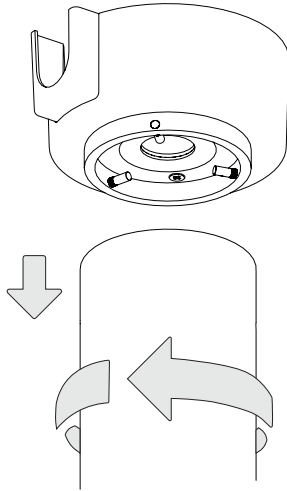

2

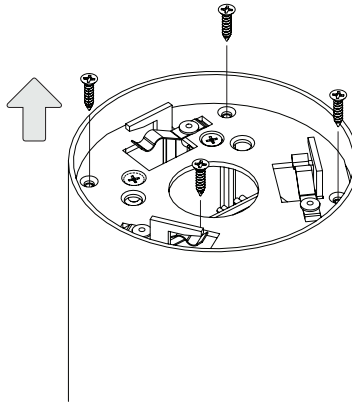


3

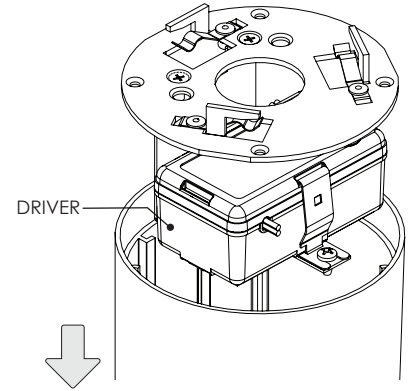

DRIVER

LED SERVICING

1

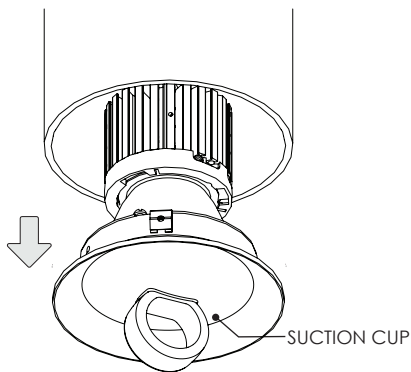

REPEAT DRIVER SERVICING STEPS
DISCONNECT LED WIRES AND REMOVE LED INSERT

2

