
# 3.3" MICRO MADISON CYLINDER

SURFACE MOUNT




## COMPONENTS


### STANDARD CANOPY

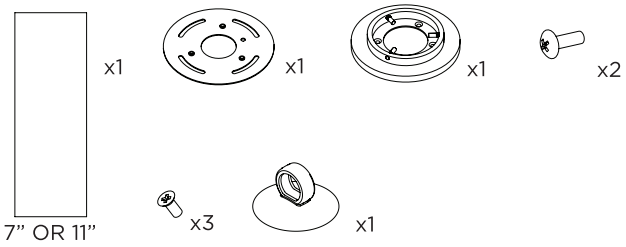



### SEAMLESS CANOPY (FOR NEW CONSTRUCTION ONLY)

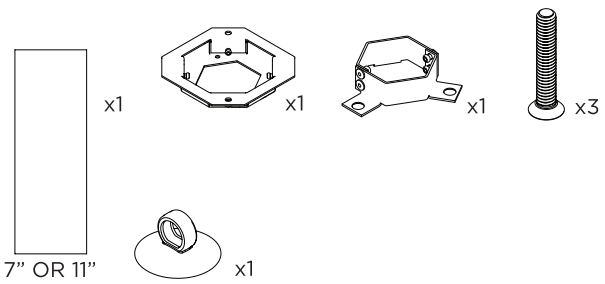



### CONDUIT FEED CANOPY

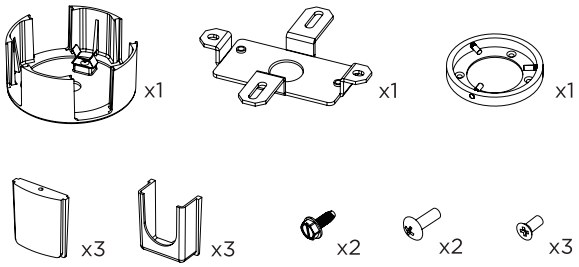



## 4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

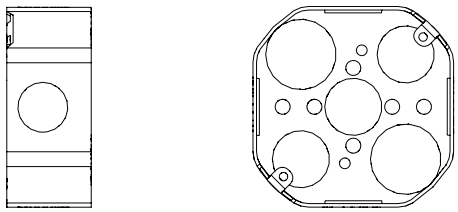


JUNCTION BOX (BY OTHERS)

| INSTRUCTION KEY | INFORMATION |
|---|---|
| ⚠ ADDITIONAL<br>ⓘ ATTENTION<br>POWER ON<br>POWER OFF | INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN<br>REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION<br>FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY<br>DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS<br>TURN OFF POWER DURING INSTALLATION OR SERVICING |


1

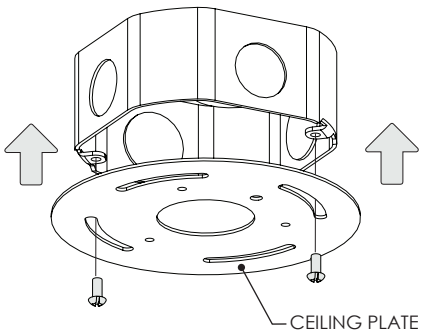



2A

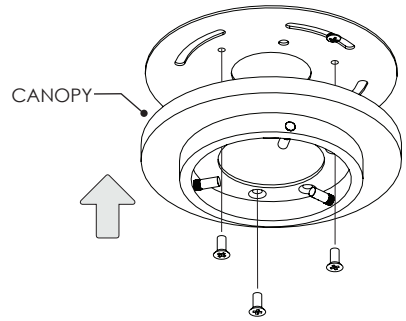



2B




3A

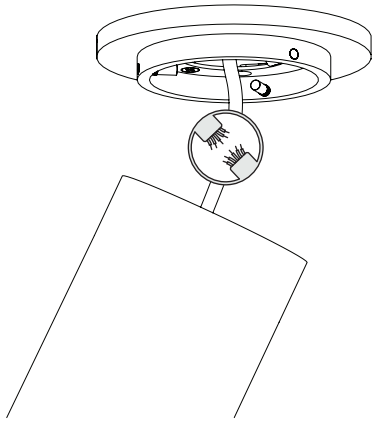


3B





| WIRING DIAGRAM | | |
|---|---|---|
| 1 | BLACK | HOT/LINE |
| 2 | WHITE | NEUTRAL |
| 3 | GREEN | GROUND |
| 4 | ORANGE | (DIM+) |
| 5 | PURPLE | (DIM-) |

4

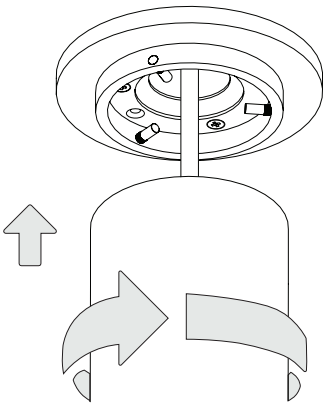


## 1

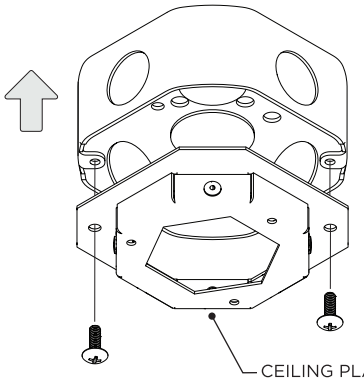



MUST BE INSTALLED PRIOR TO CEILING


## 1A CEILING CUTOUT

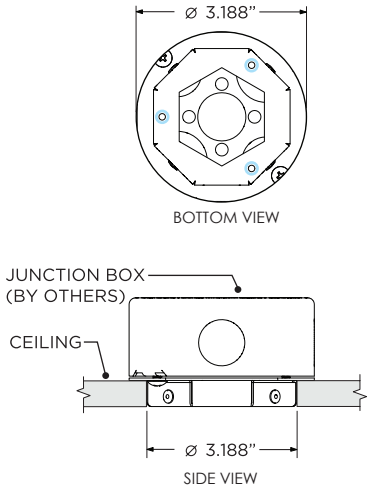



## 2A

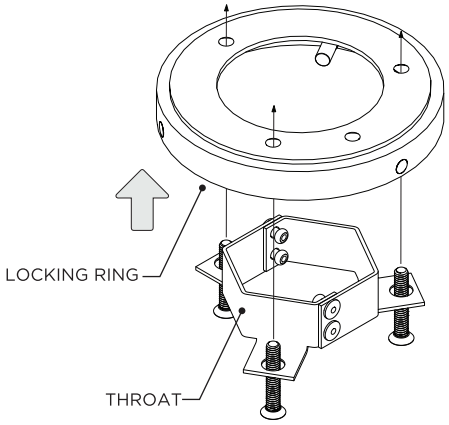


## 2B

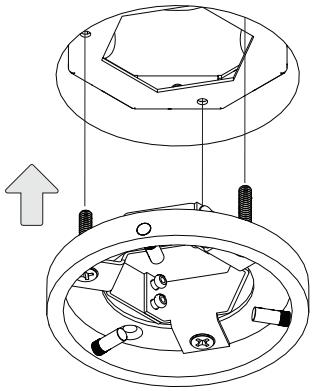

## 3A

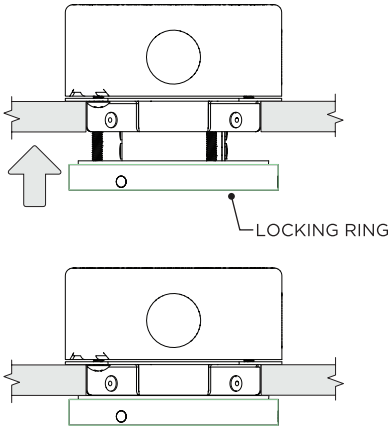



TIGHTEN SCREWS UNTIL LOCKING RING
IS FLUSH WITH CEILING


## 3B

**WIRING LEGEND**

| | |
|---|---|
| BLACK | HOT/LINE |
| WHITE | NEUTRAL |
| GREEN | GROUND |
| ORANGE | (DIM+) |
| PURPLE | (DIM-) |

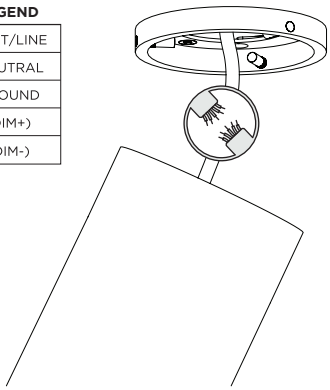

## 4

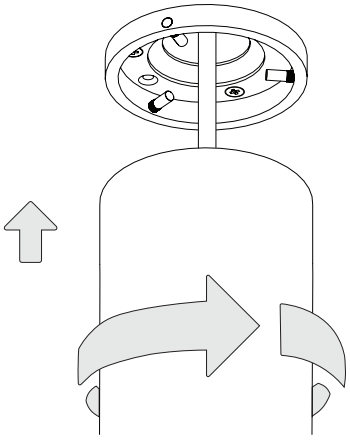


3G LIGHTING


**3.3" MICRO MADISON CYLINDER**
SURFACE MOUNT

**UNIVERSAL CONDUIT FEED CANOPY INSTALLATION**
SUITABLE FOR MAXIMUM 3 CONDUIT FEEDS


1

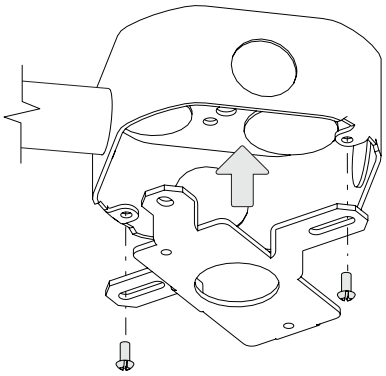

2

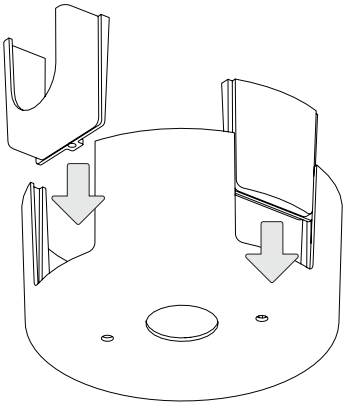


3A

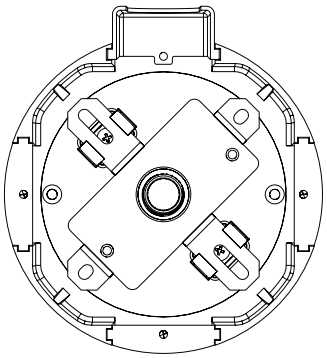


ENSURE CANOPY CLIPS ALIGN WITH BRACKET


3B

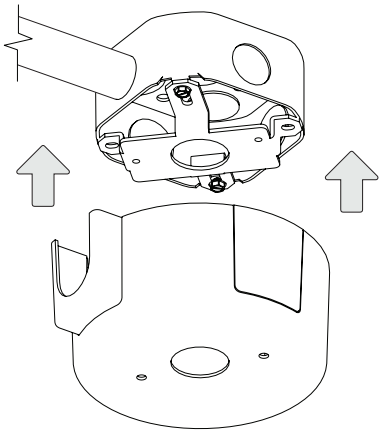

4A

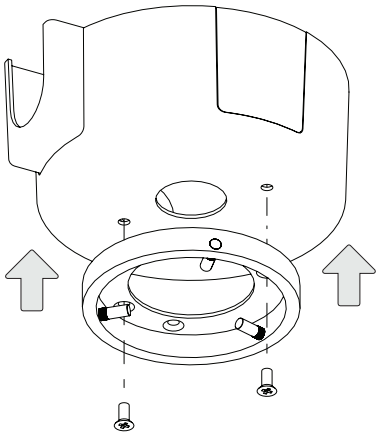


4B

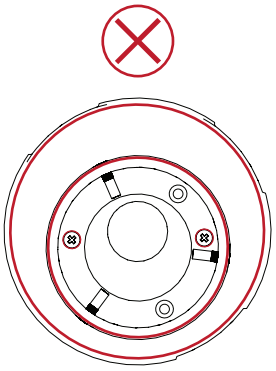


TOP VIEW

4C

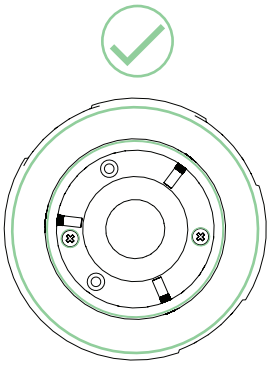


TOP VIEW

5A

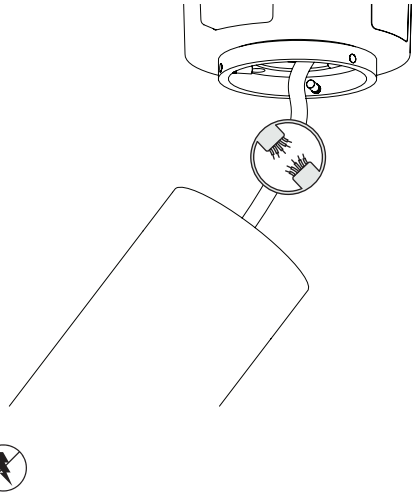



5B




| WIRING DIAGRAM | | |
|---|---|---|
| 1 | BLACK | HOT/LINE |
| 2 | WHITE | NEUTRAL |
| 3 | GREEN | GROUND |
| 4 | ORANGE | (DIM+) |
| 5 | PURPLE | (DIM-) |


6

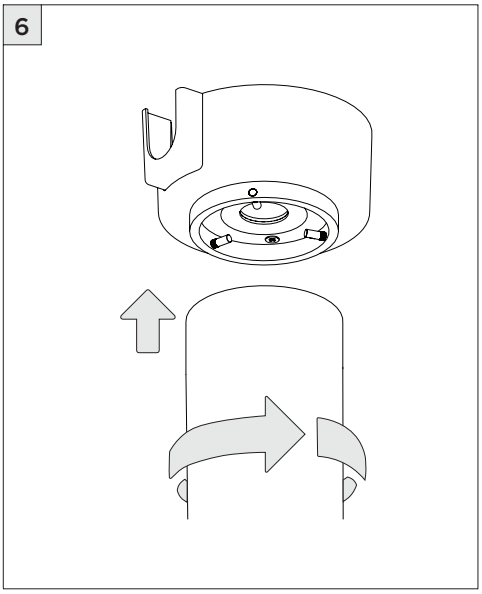

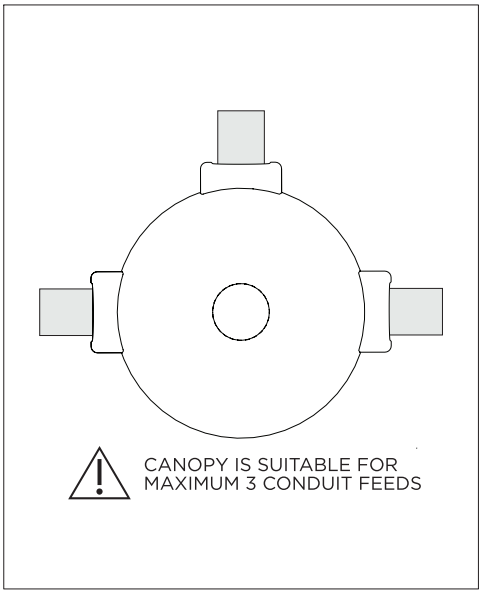


## DRIVER SERVICING


1

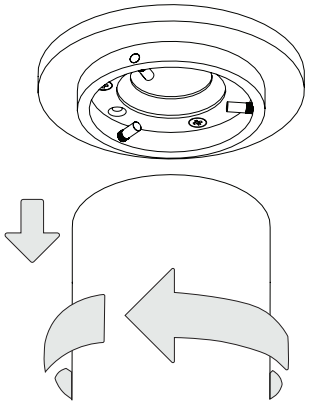

2

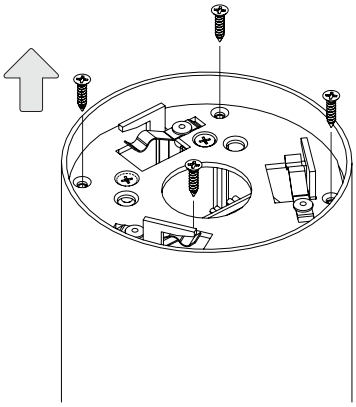


3

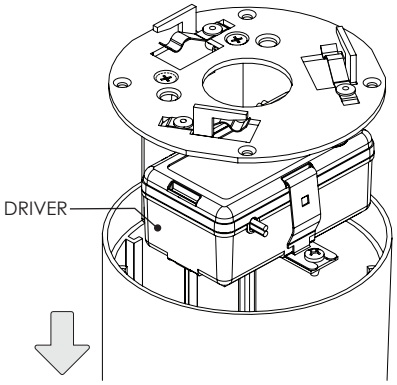



## LED SERVICING


1

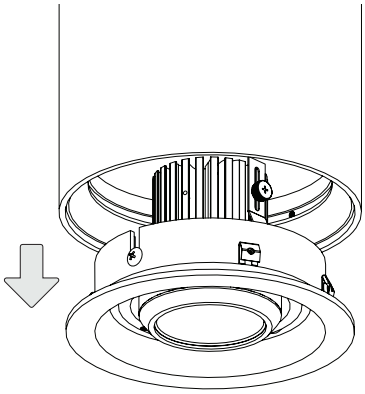

2

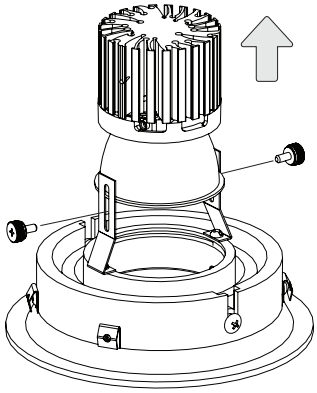


3

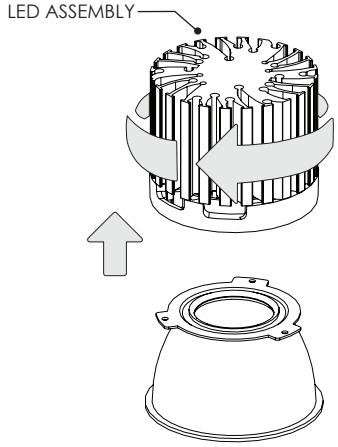


## DRIVER SERVICING


1

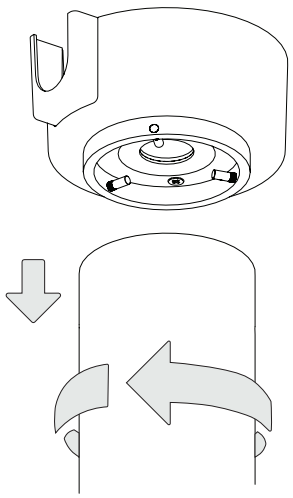

2

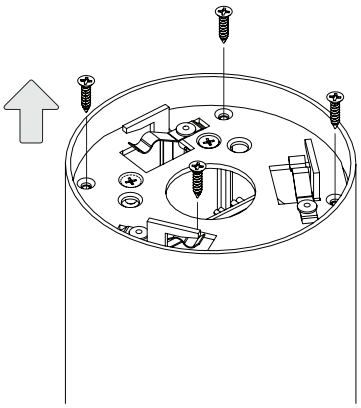


3

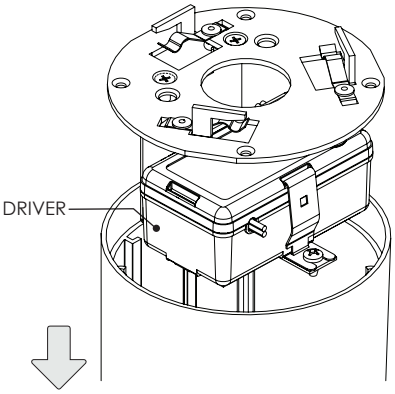



## LED SERVICING


1

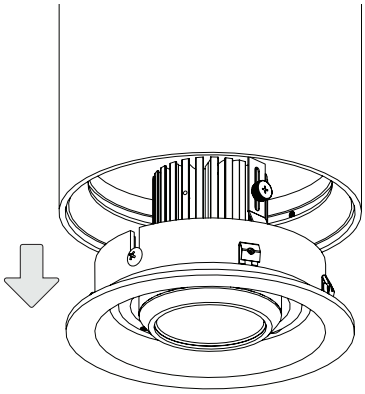

2

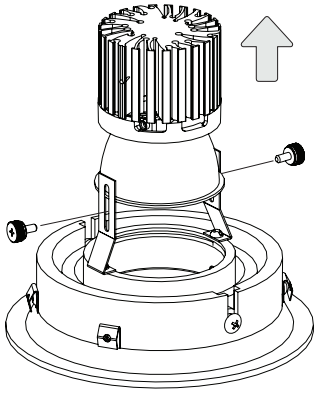

3

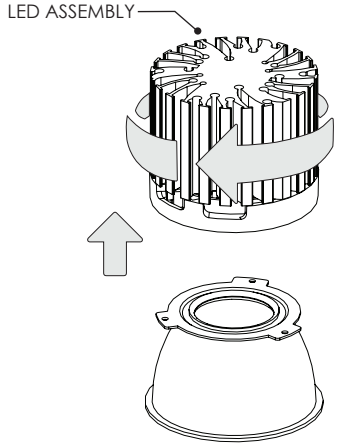


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


## OPTIONS



SOFTENING/LINEAR SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

### 1

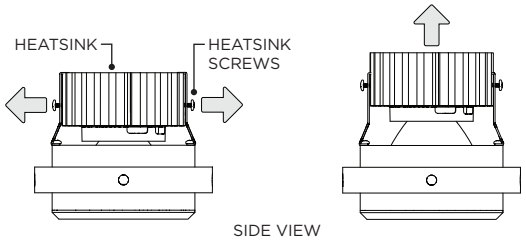



LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR OPTICAL ACCESSORY CLEARANCE

### 2

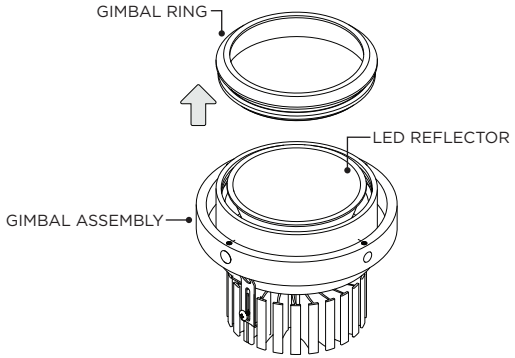



TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

### 3





PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

### 4



TWIST ON GIMBAL RING TO LOCK IN PLACE

### 5

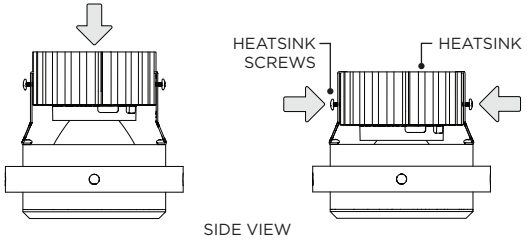


LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS