

4.5" ZOIE CYLINDER - PENDANT


STEM PENDANT MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

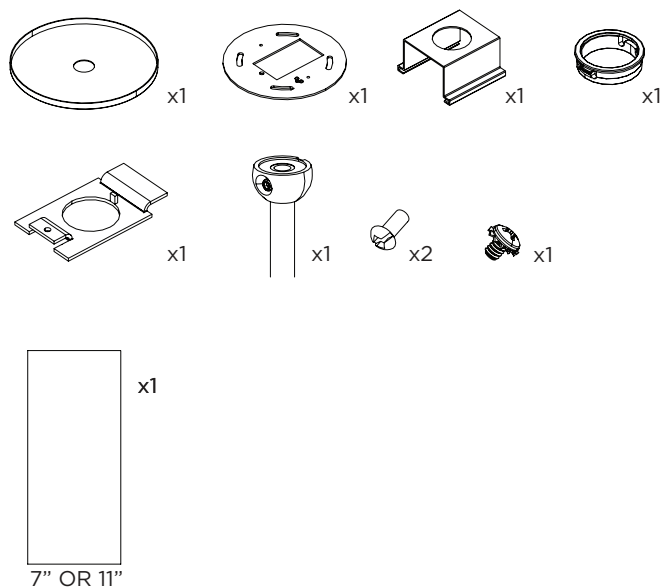


CONDUIT FEED CANOPY

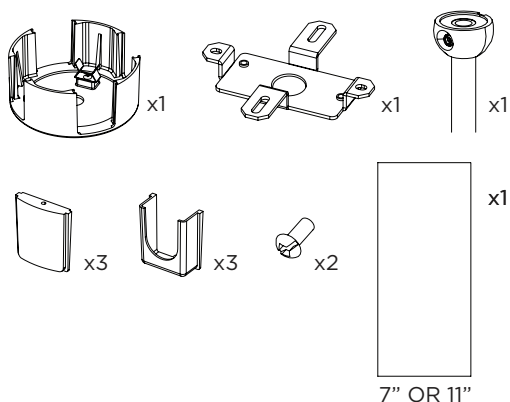

! Ž) ~ \$ CANOPY

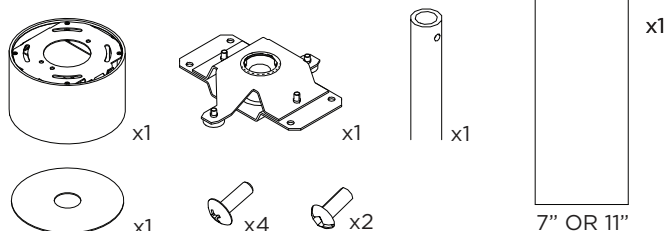


4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

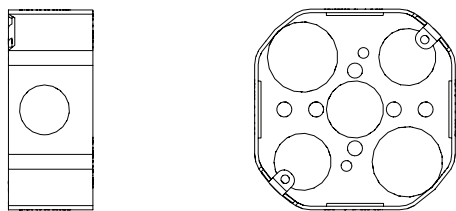

JUNCTION BOX (BY OTHERS)

SUITABLE FOR SLOPED CEILING

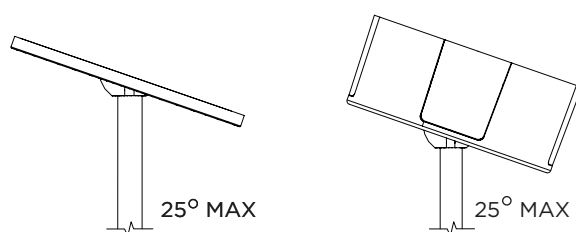






INSTRUCTION KEY


INFORMATION

- ⚠ ADDITIONAL
- ⓘ ATTENTION
- ⚡ POWER ON
- ⏻ POWER OFF



INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
TURN OFF POWER DURING INSTALLATION OR SERVICING

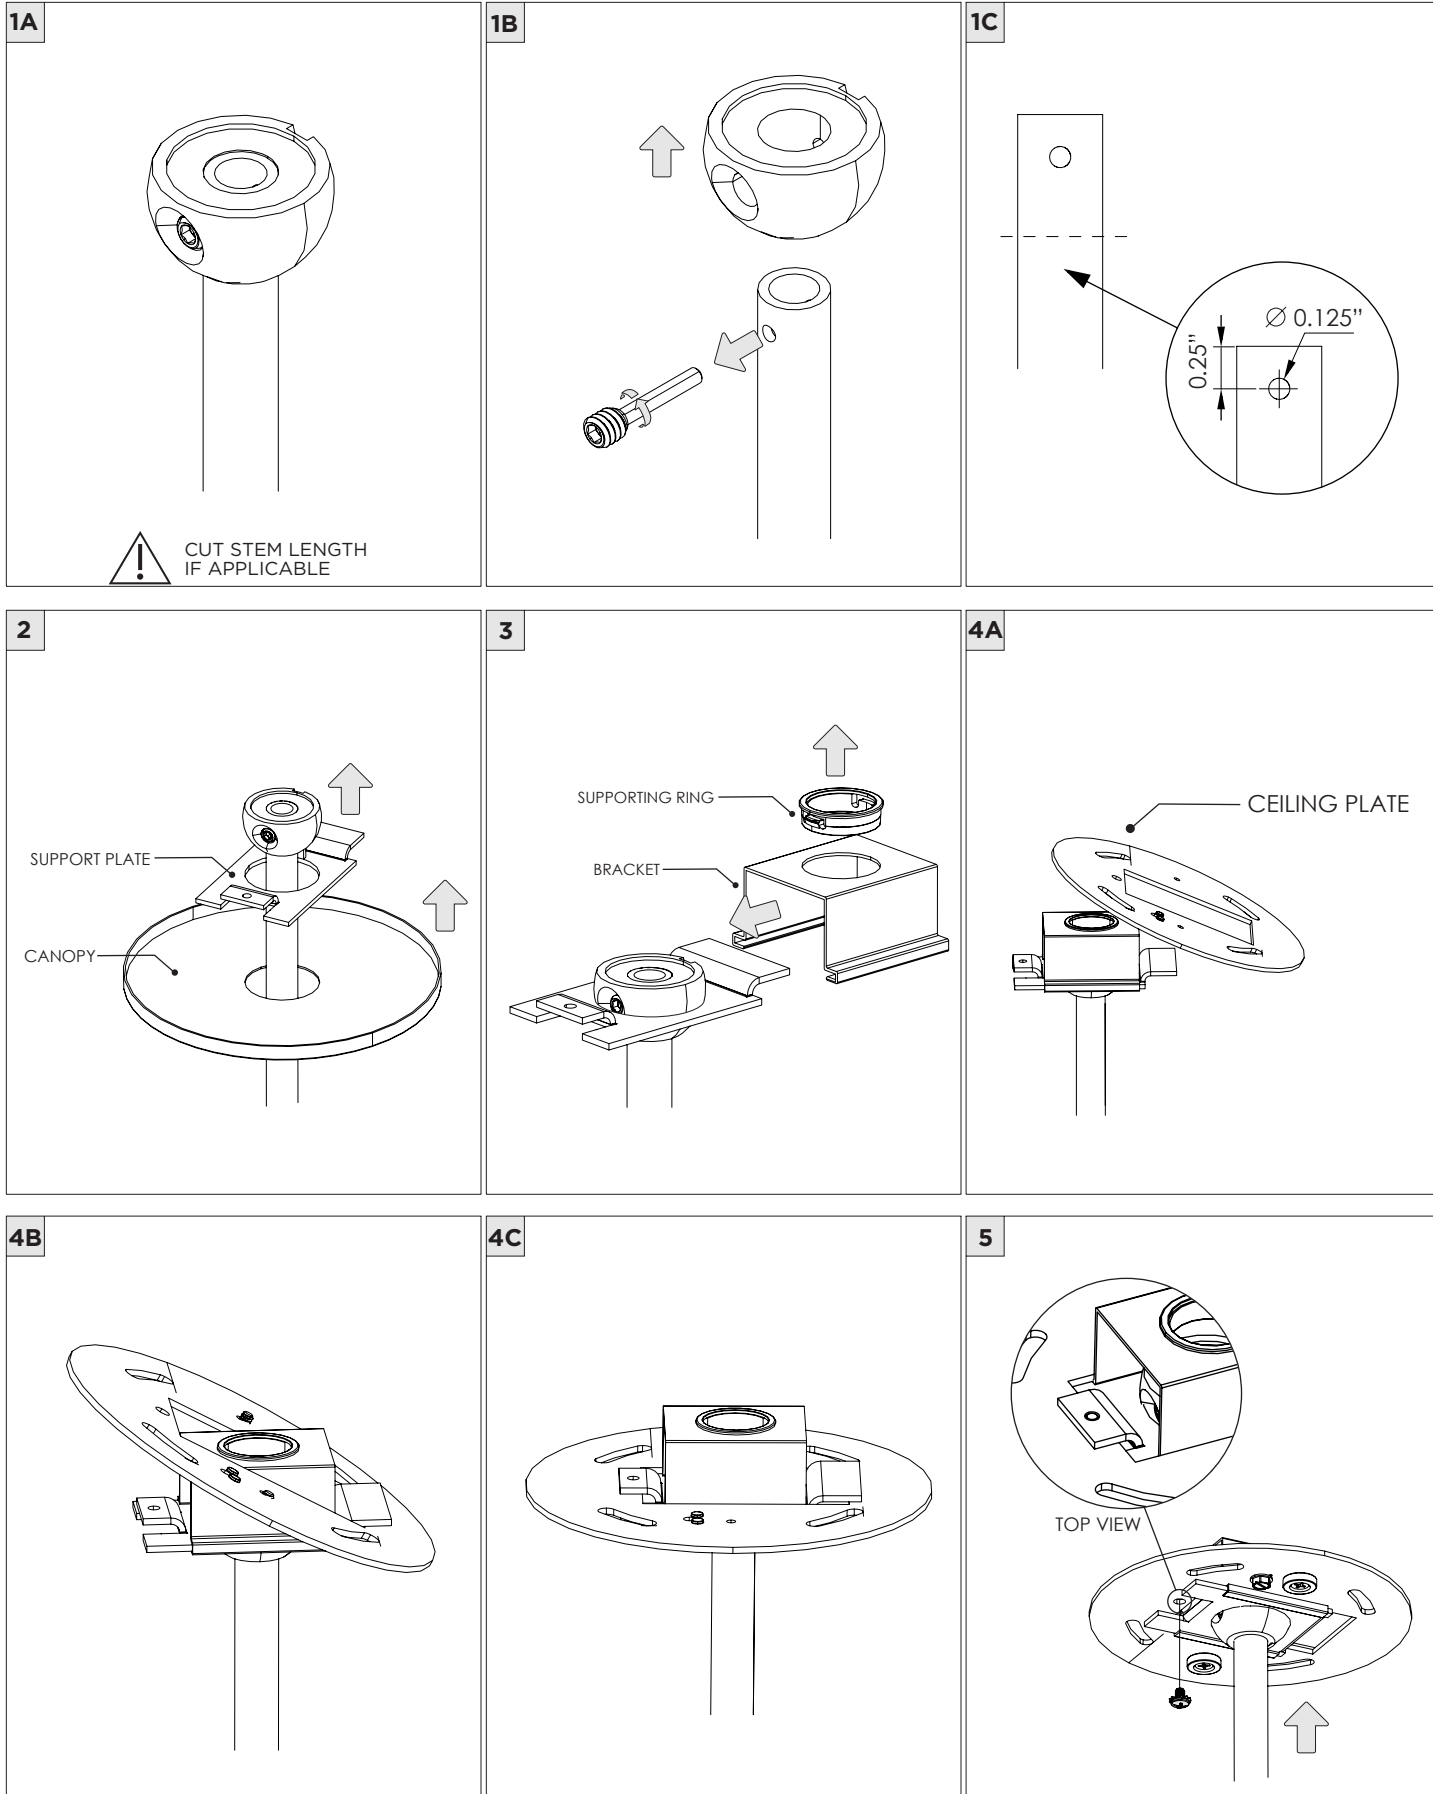

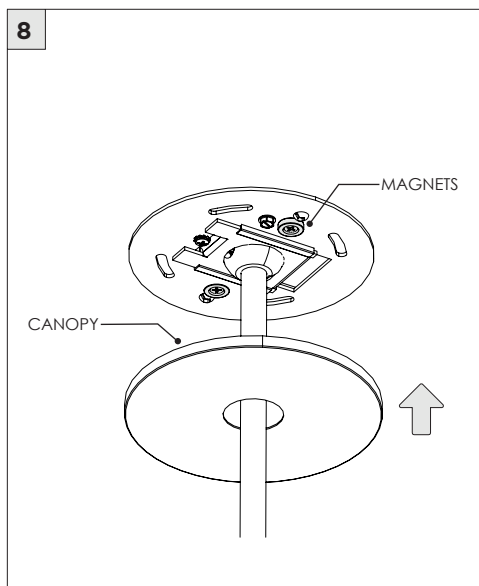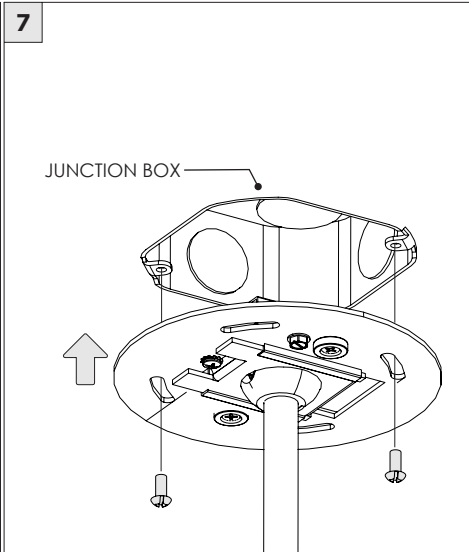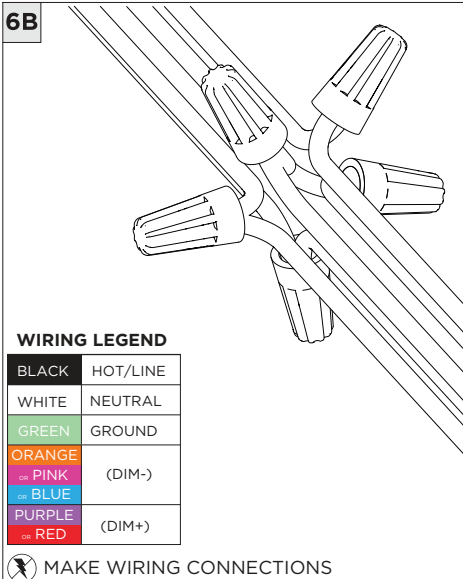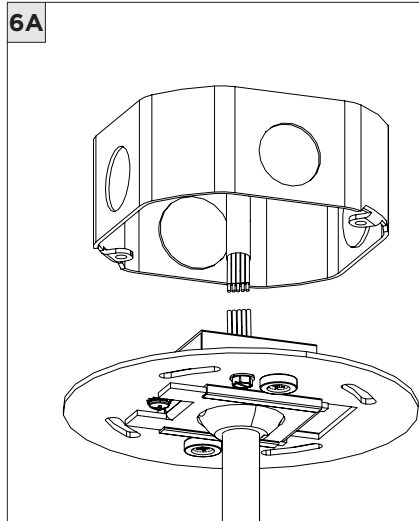


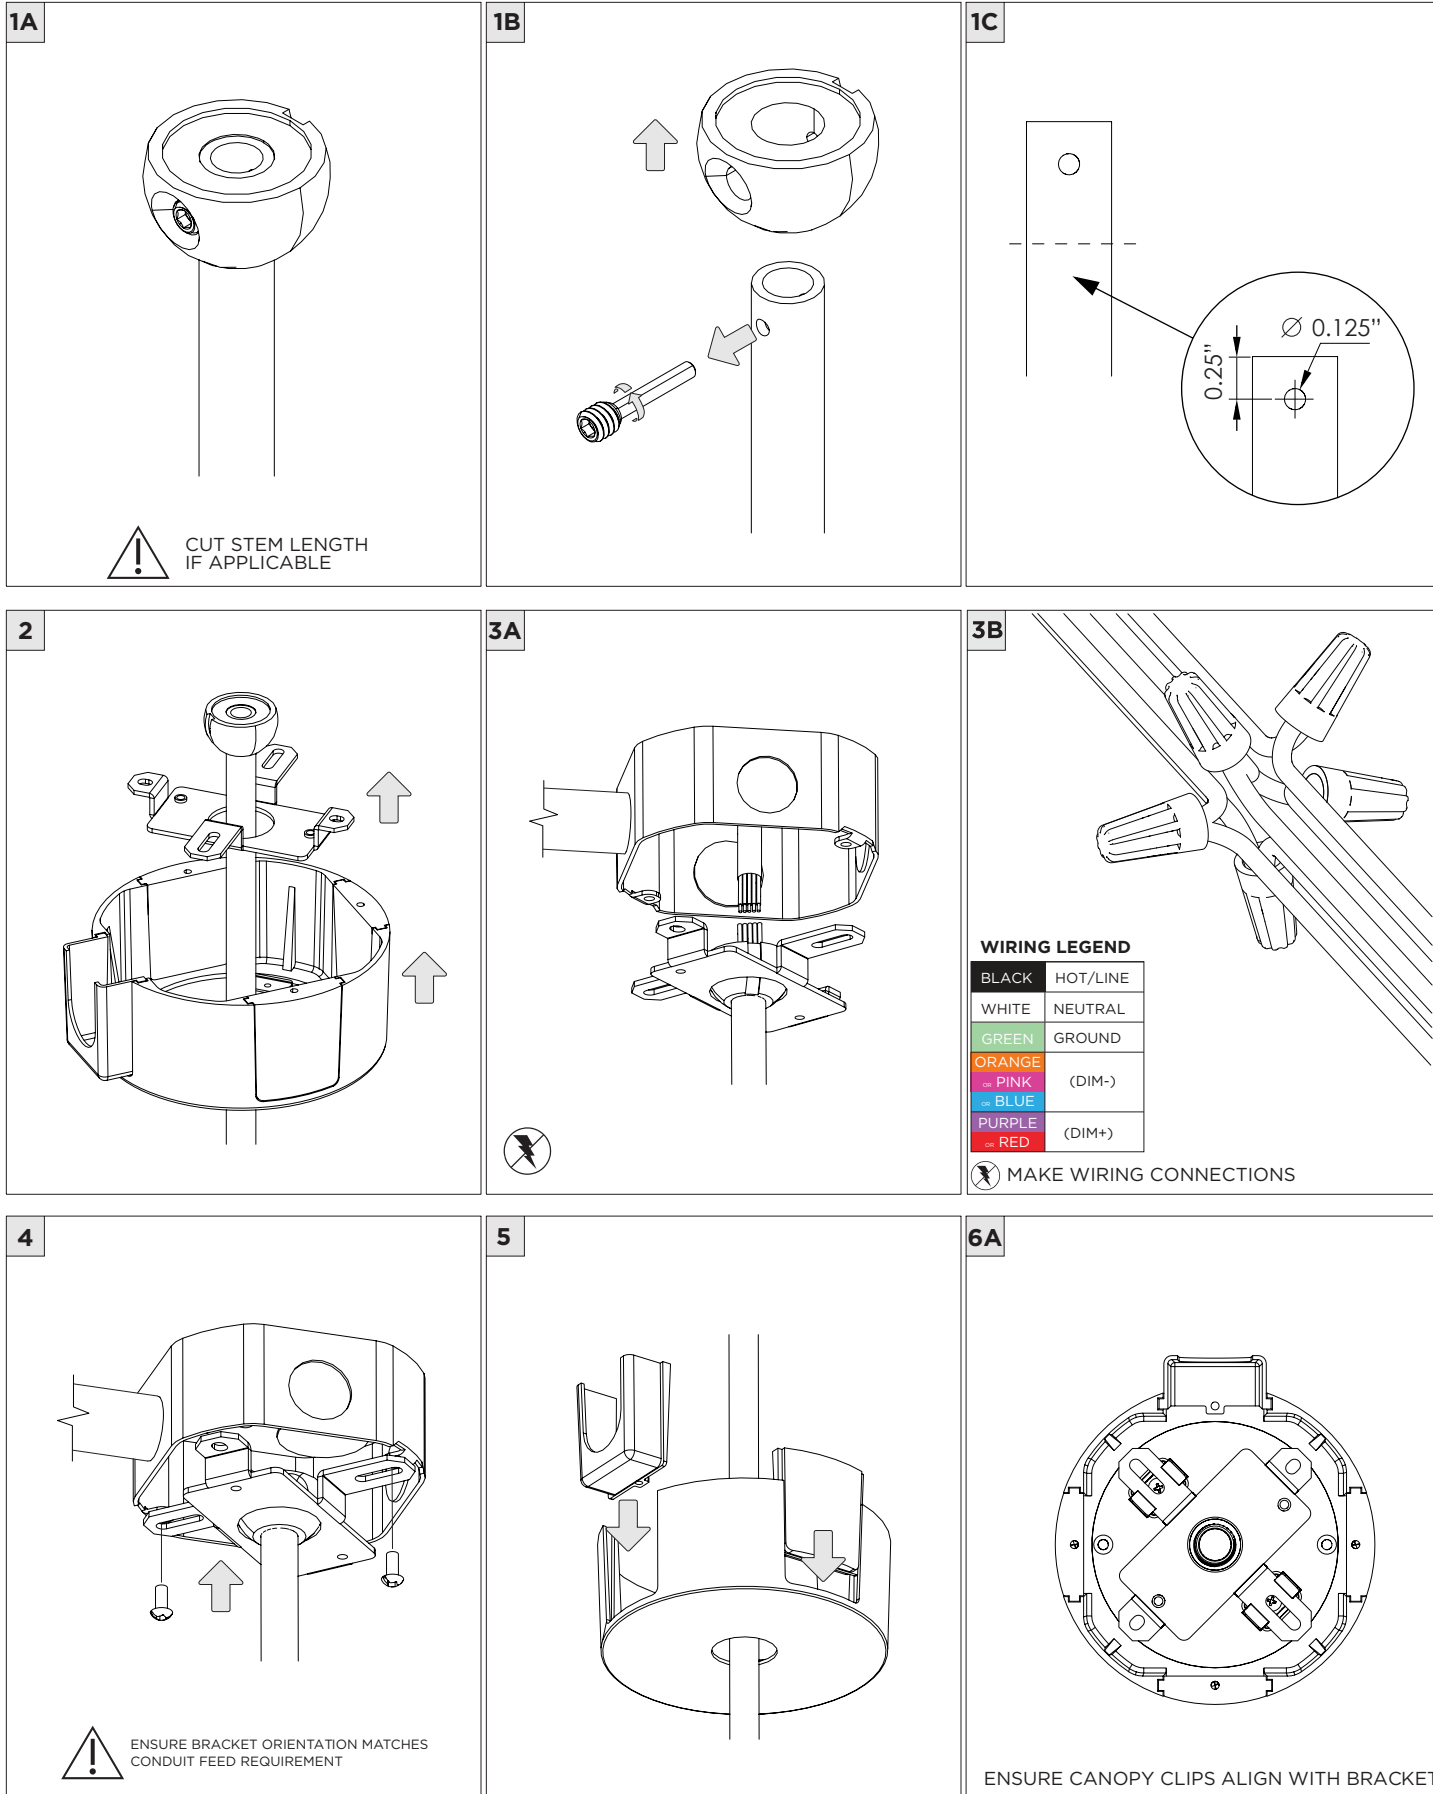


6B

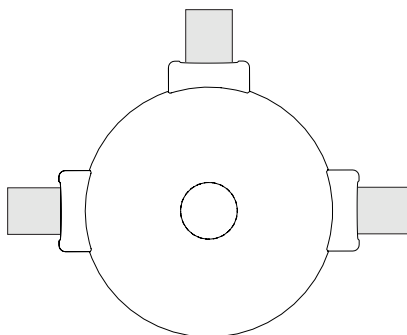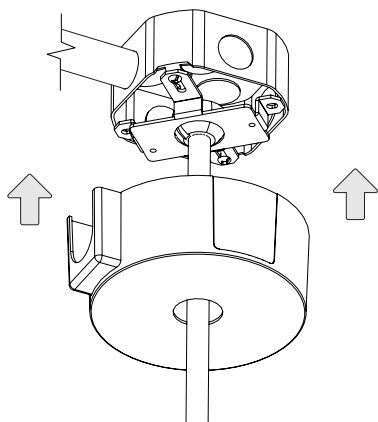


CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

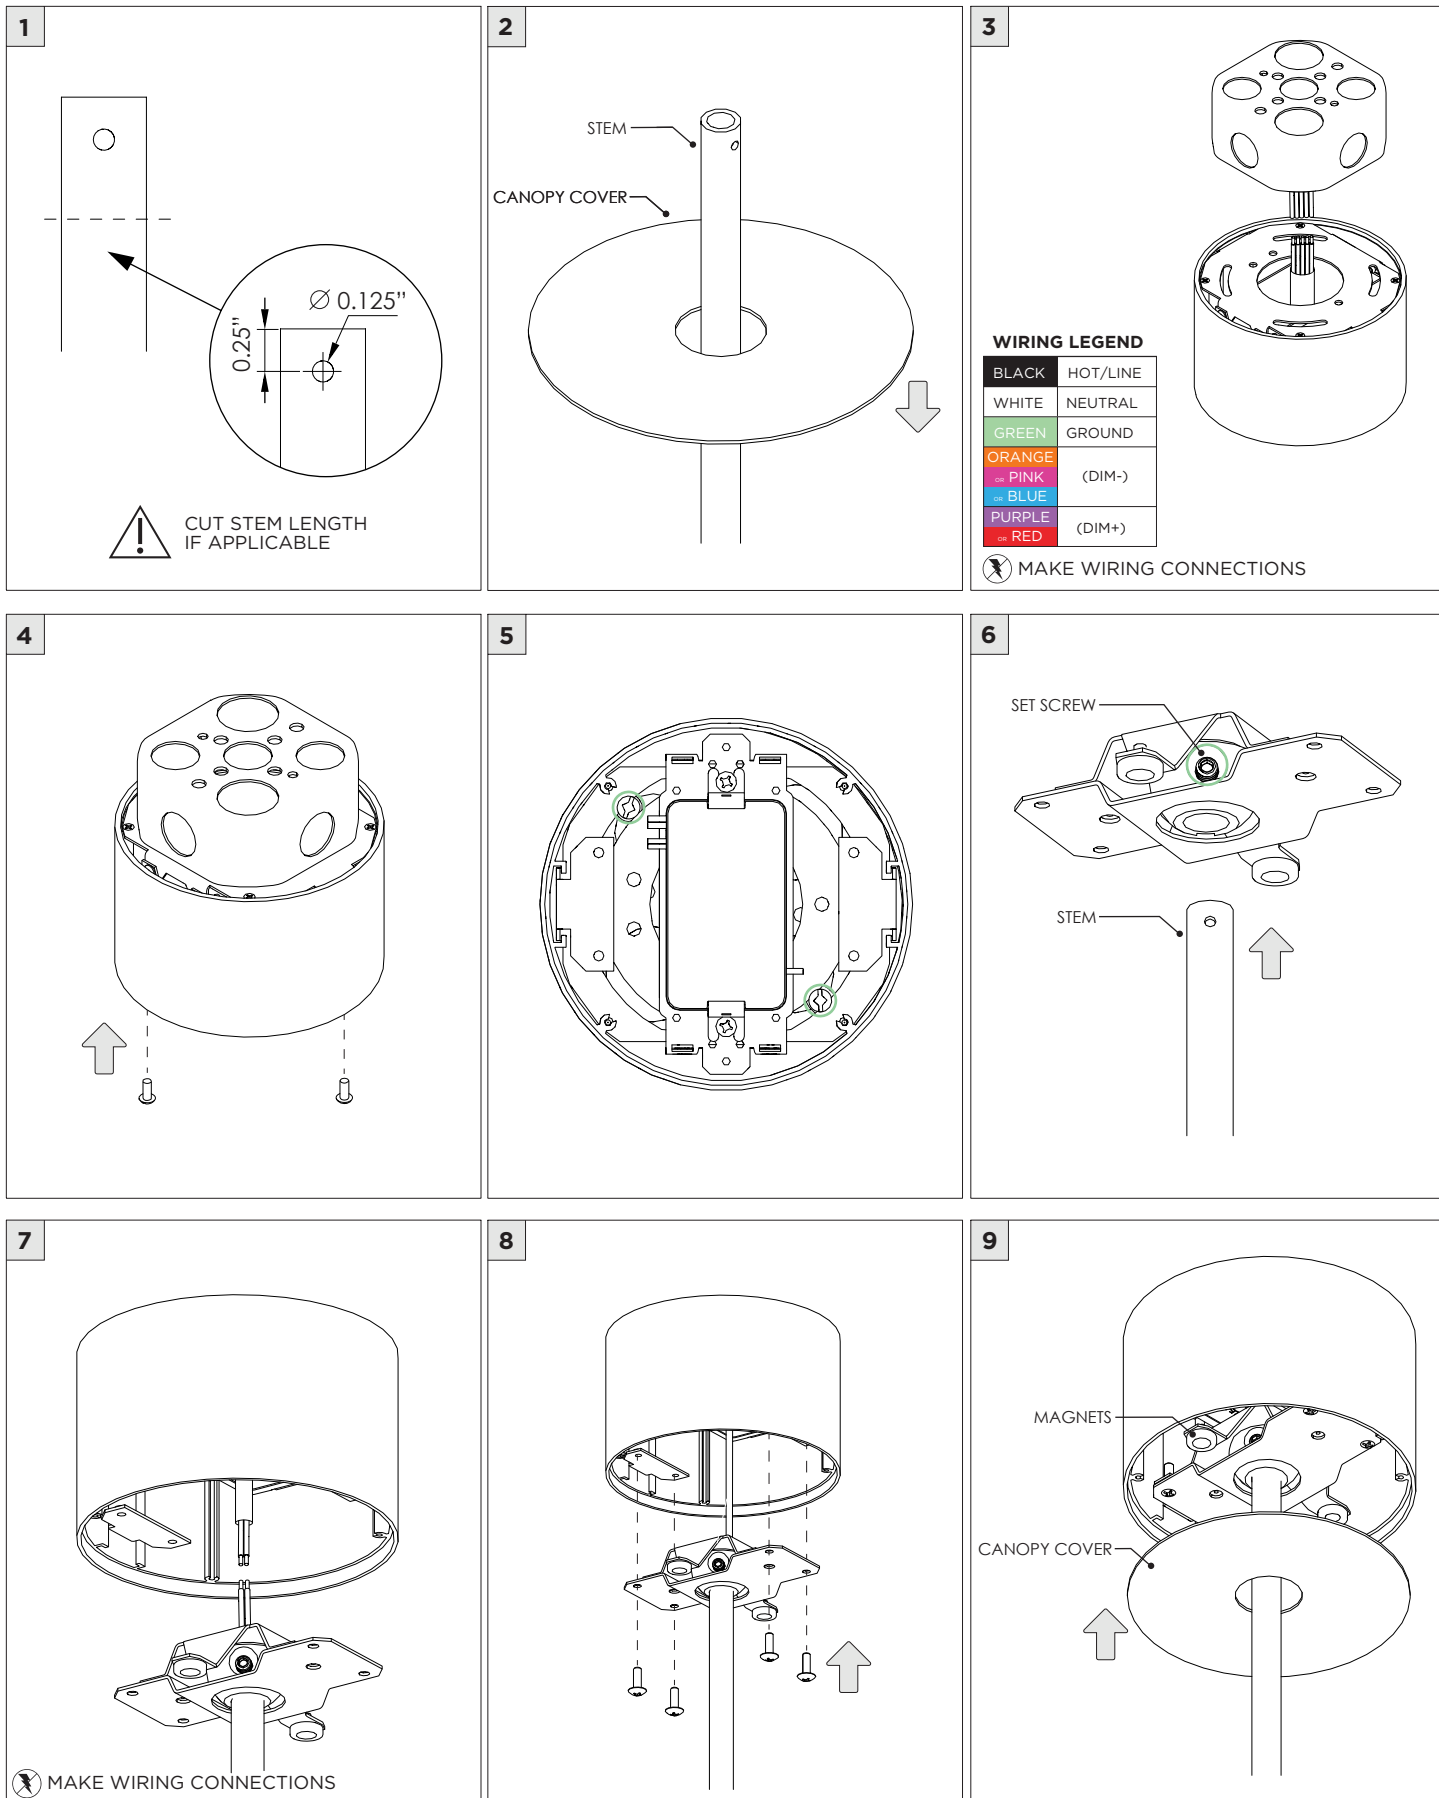


1 CONDUIT FEED CANOPY

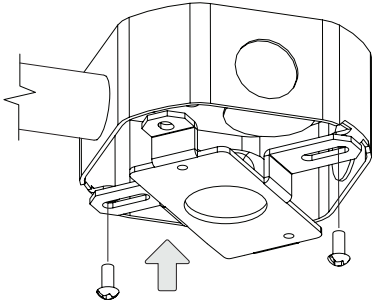

2

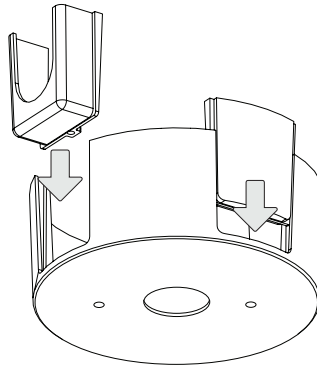


3

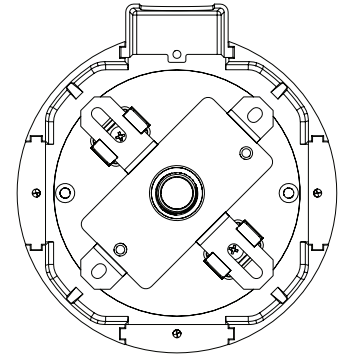


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

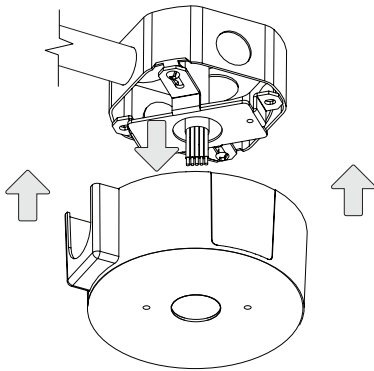


CONNECT CANDUIT CANOPY AND FEED
JUNCTION BOX WIRES THROUGH HOLE

5

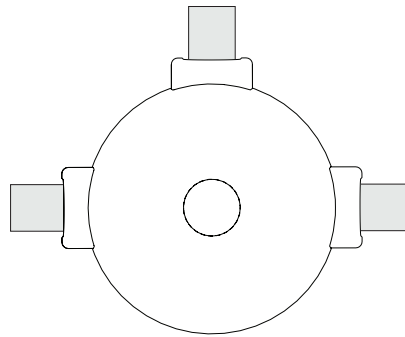

! CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

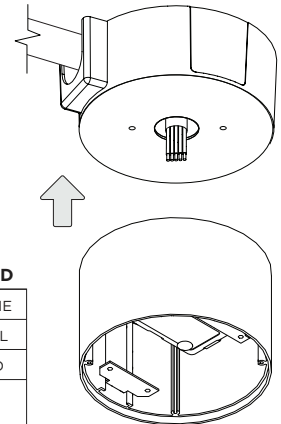


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PINK	(DIM-)
BLUE	(DIM-)
PURPLE	(DIM+)
RED	(DIM+)

! MAKE WIRING CONNECTIONS

7

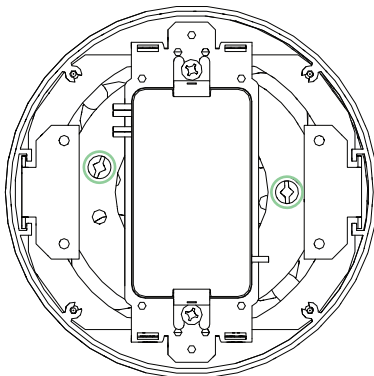






8

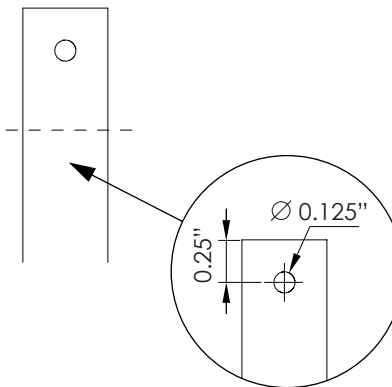

! CUT STEM LENGTH
IF APPLICABLE


9

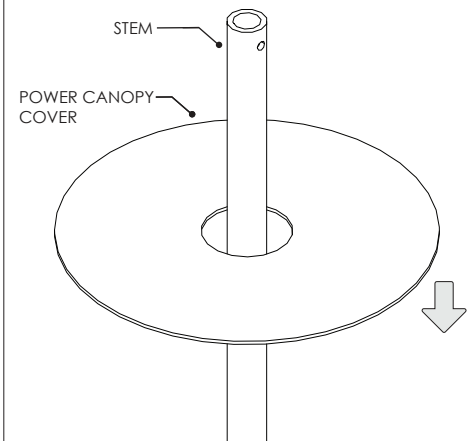

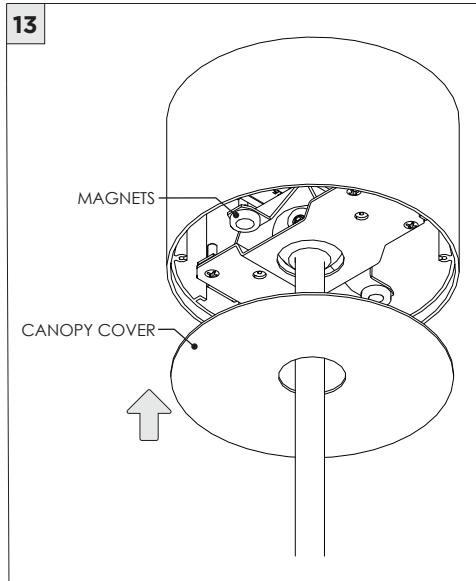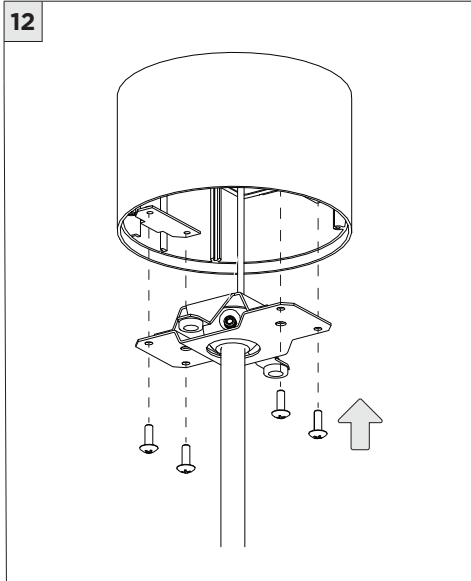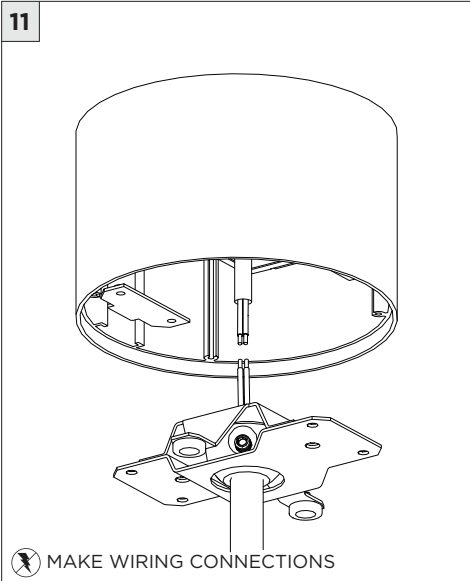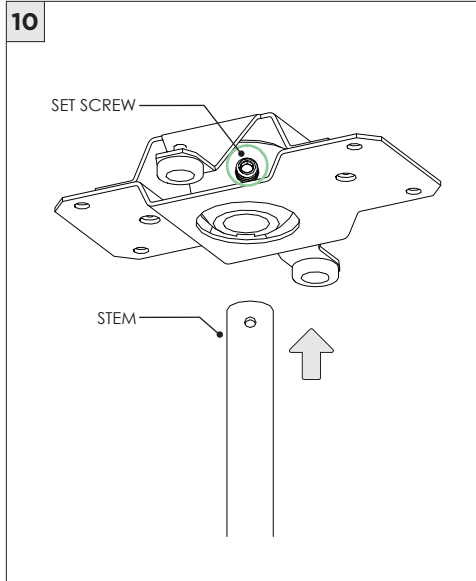


DRIVER SERVICING

1

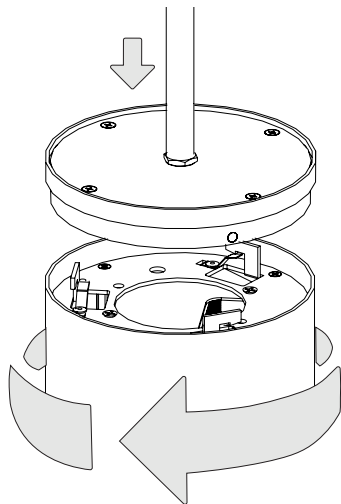


2

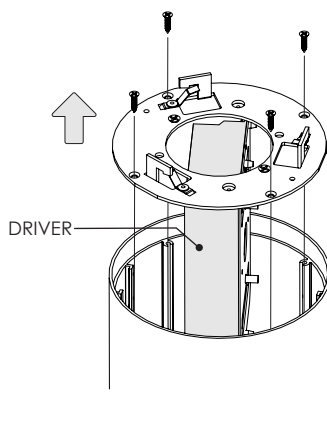


LED SERVICING

1

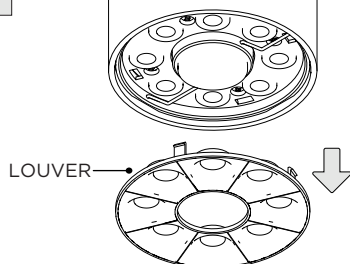


UNCLIP LOUVER FROM LED ASSEMBLY

2




UNCLIP CENTER CAP FROM LED ASSEMBLY

3




LOCATE CENTER SCREW

4




UNSCREW CENTER SCREW TO REMOVE LED ASSEMBLY

5

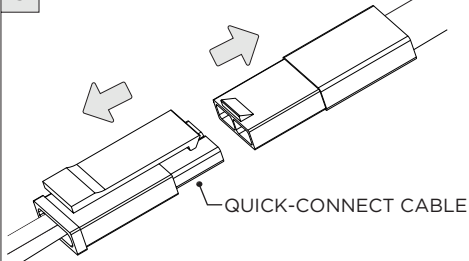


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

6

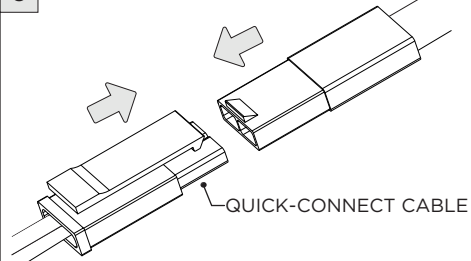


CONNECT QUICK-CONNECT CABLE TO NEW LED ASSEMBLY

7



SCREW NEW LED ASSEMBLY INTO CYLINDER

8



9

