

4.5" WALLWASH CYLINDER - PENDANT


STEM PENDANT MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

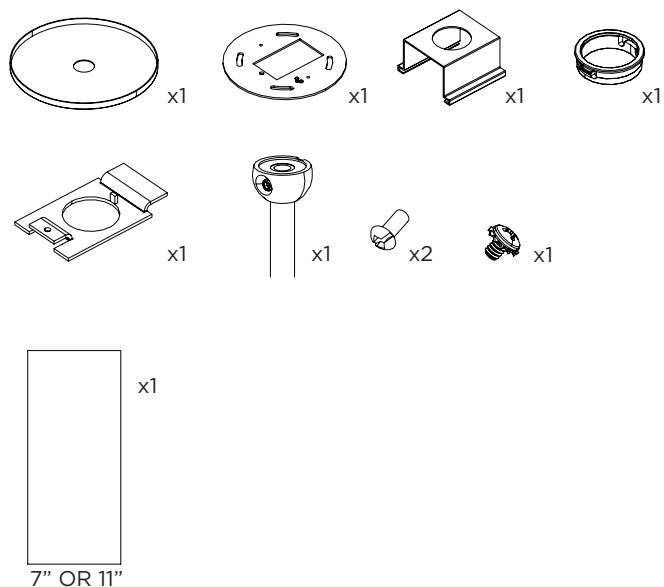


CONDUIT FEED CANOPY

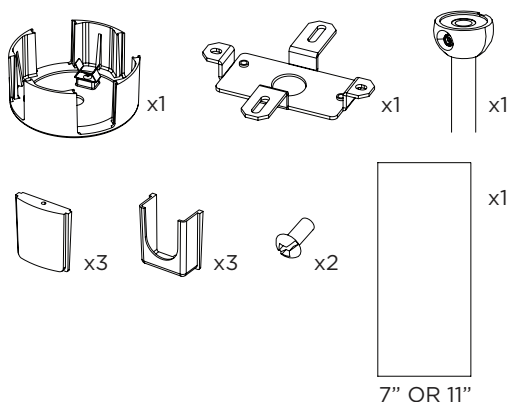

POWER CANOPY

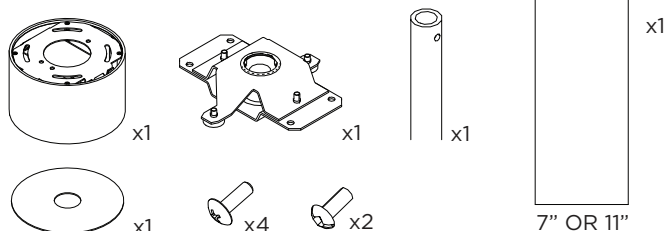


4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

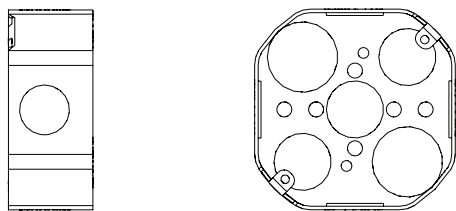

JUNCTION BOX (BY OTHERS)

SUITABLE FOR SLOPED CEILING

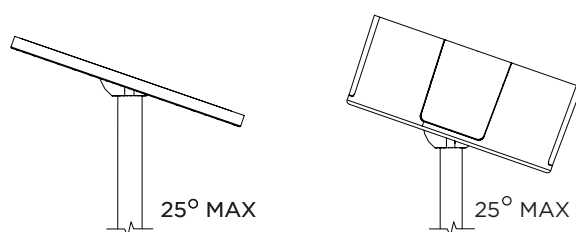


INSTRUCTION KEY

INFORMATION

- ⚠ ADDITIONAL
- ⓘ ATTENTION
- ⚡ POWER ON
- ⓧ POWER OFF


INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
TURN OFF POWER DURING INSTALLATION OR SERVICING

1A

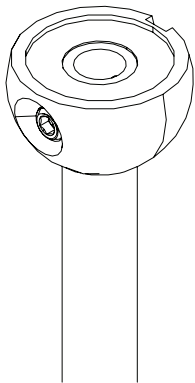


CUT STEM LENGTH
IF APPLICABLE


1B

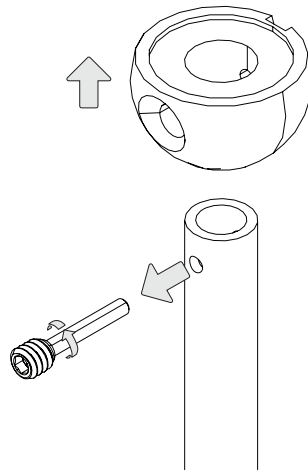


1C

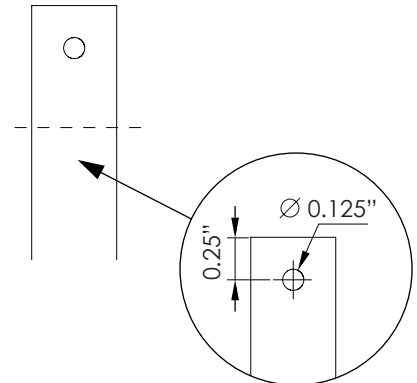


2

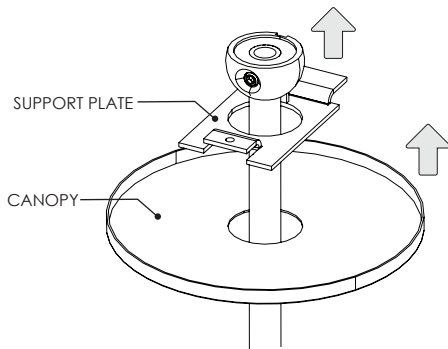


3

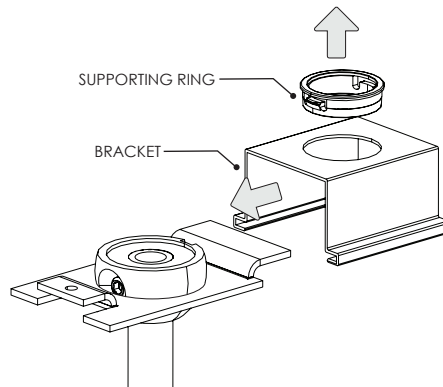


4A

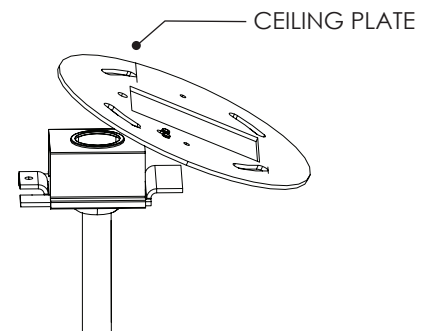


4B




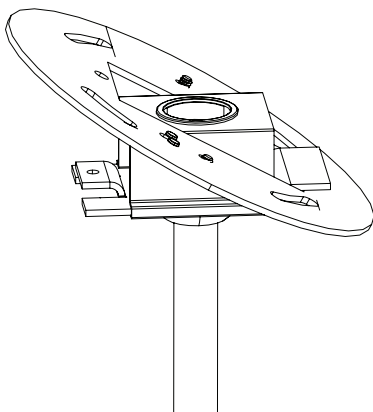











4C

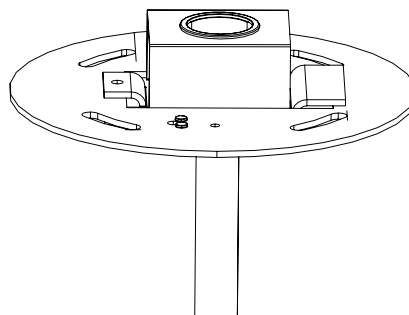



5

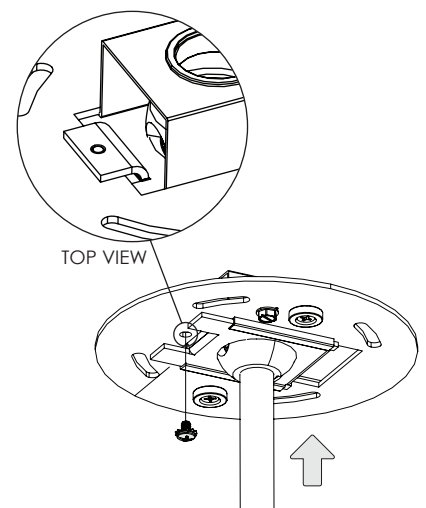

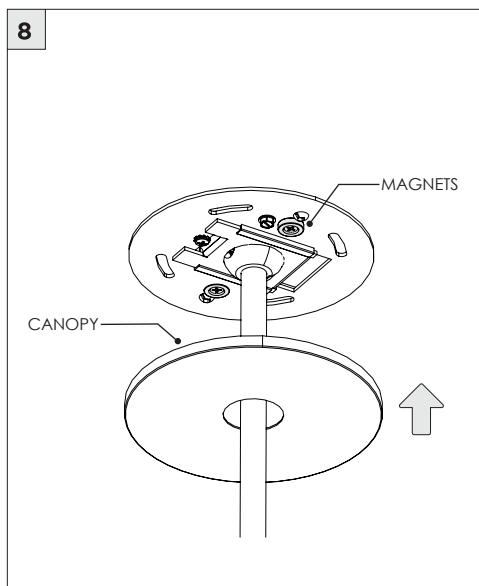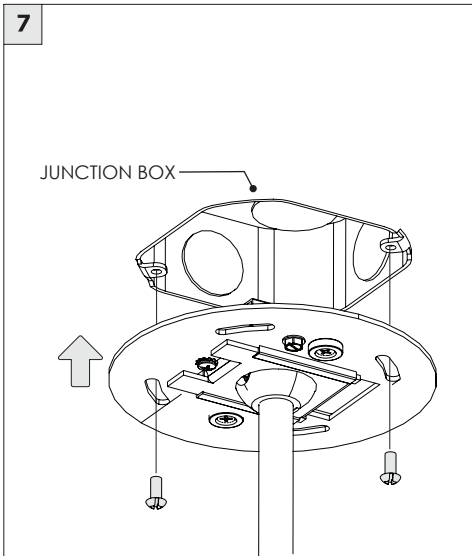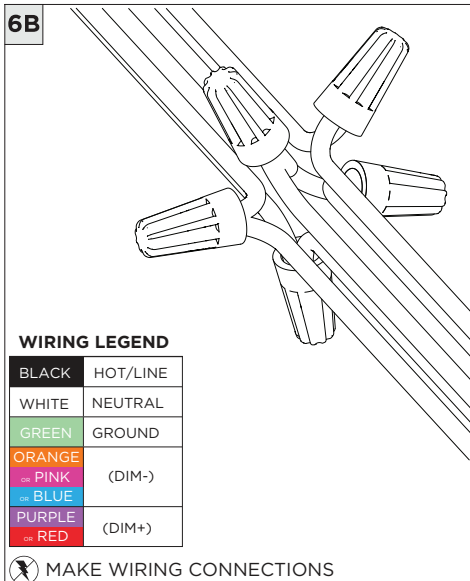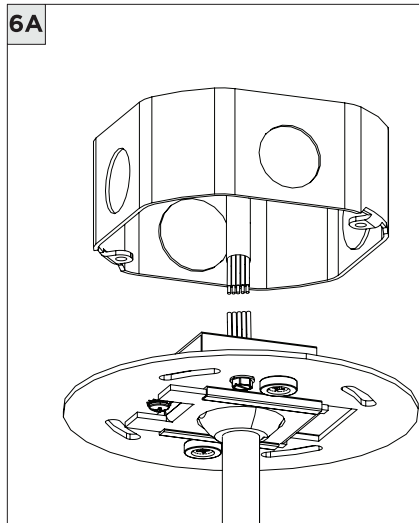


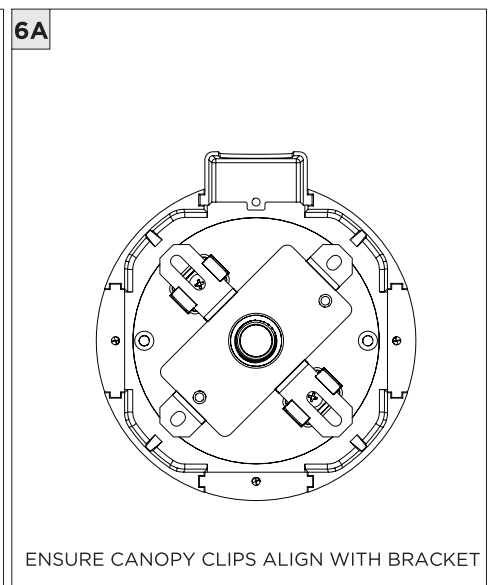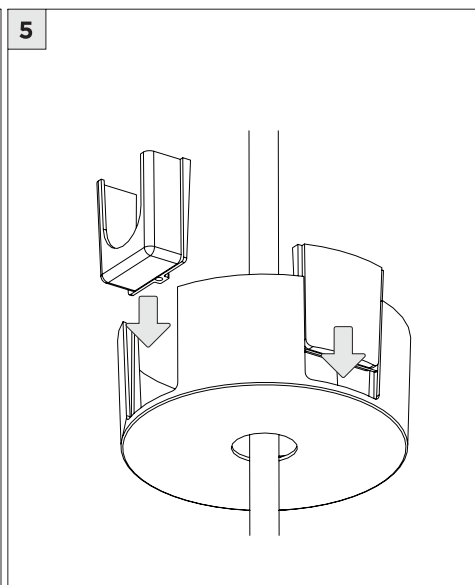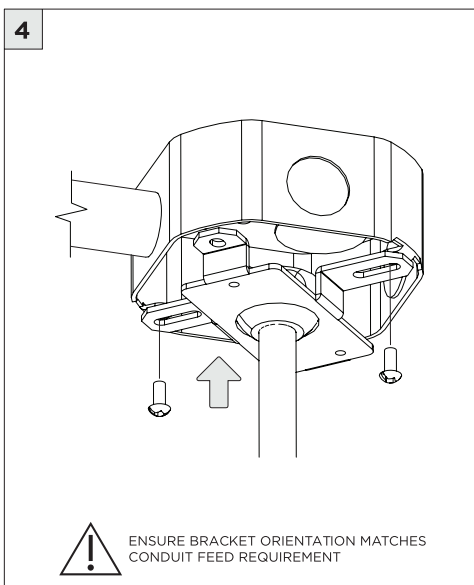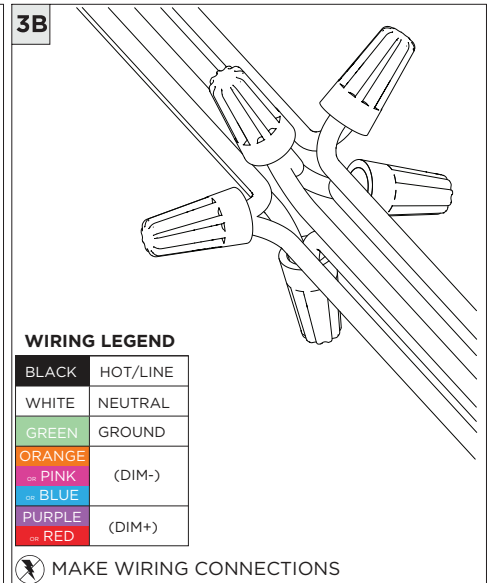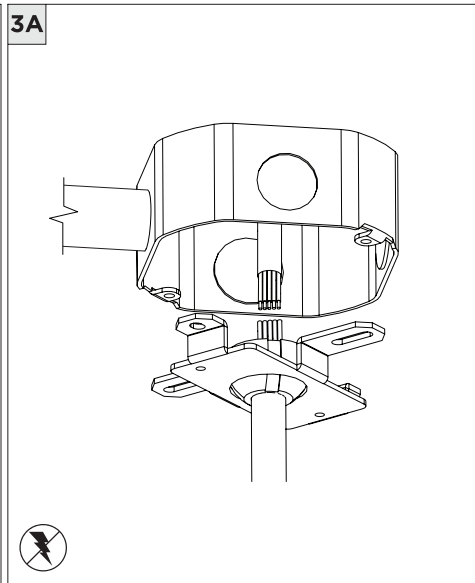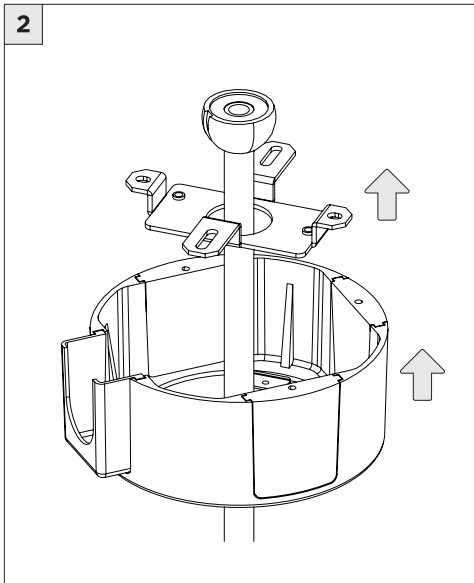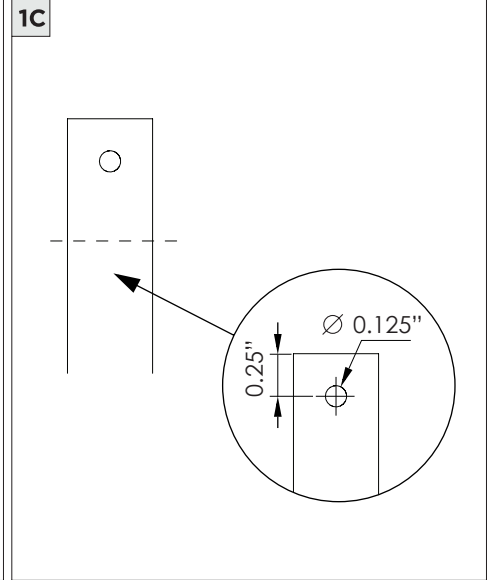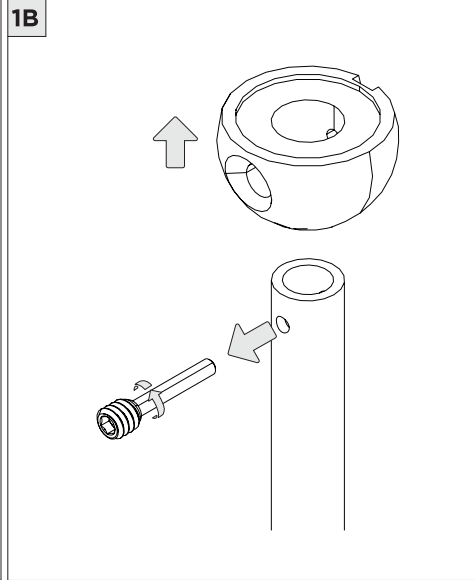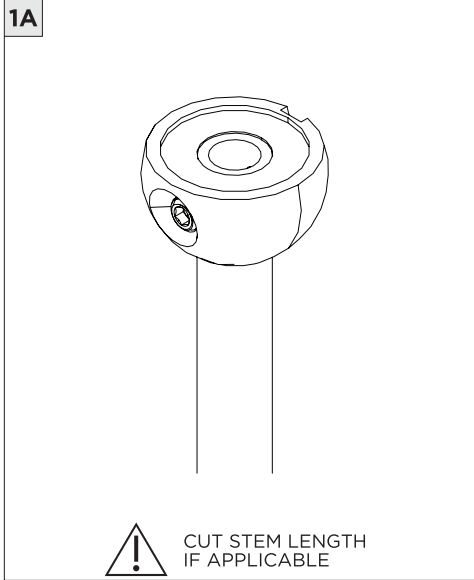


6B

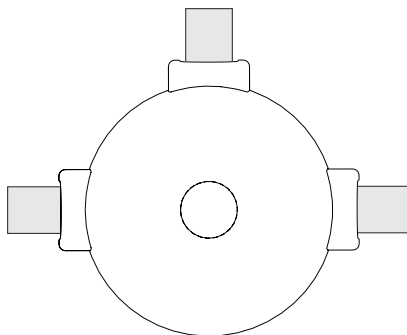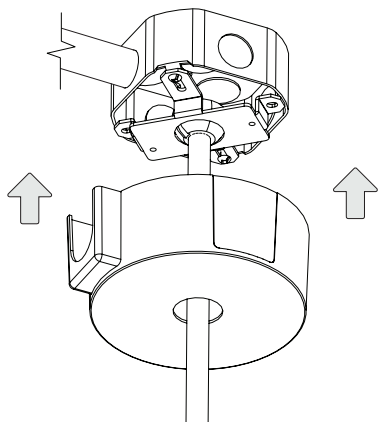


CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

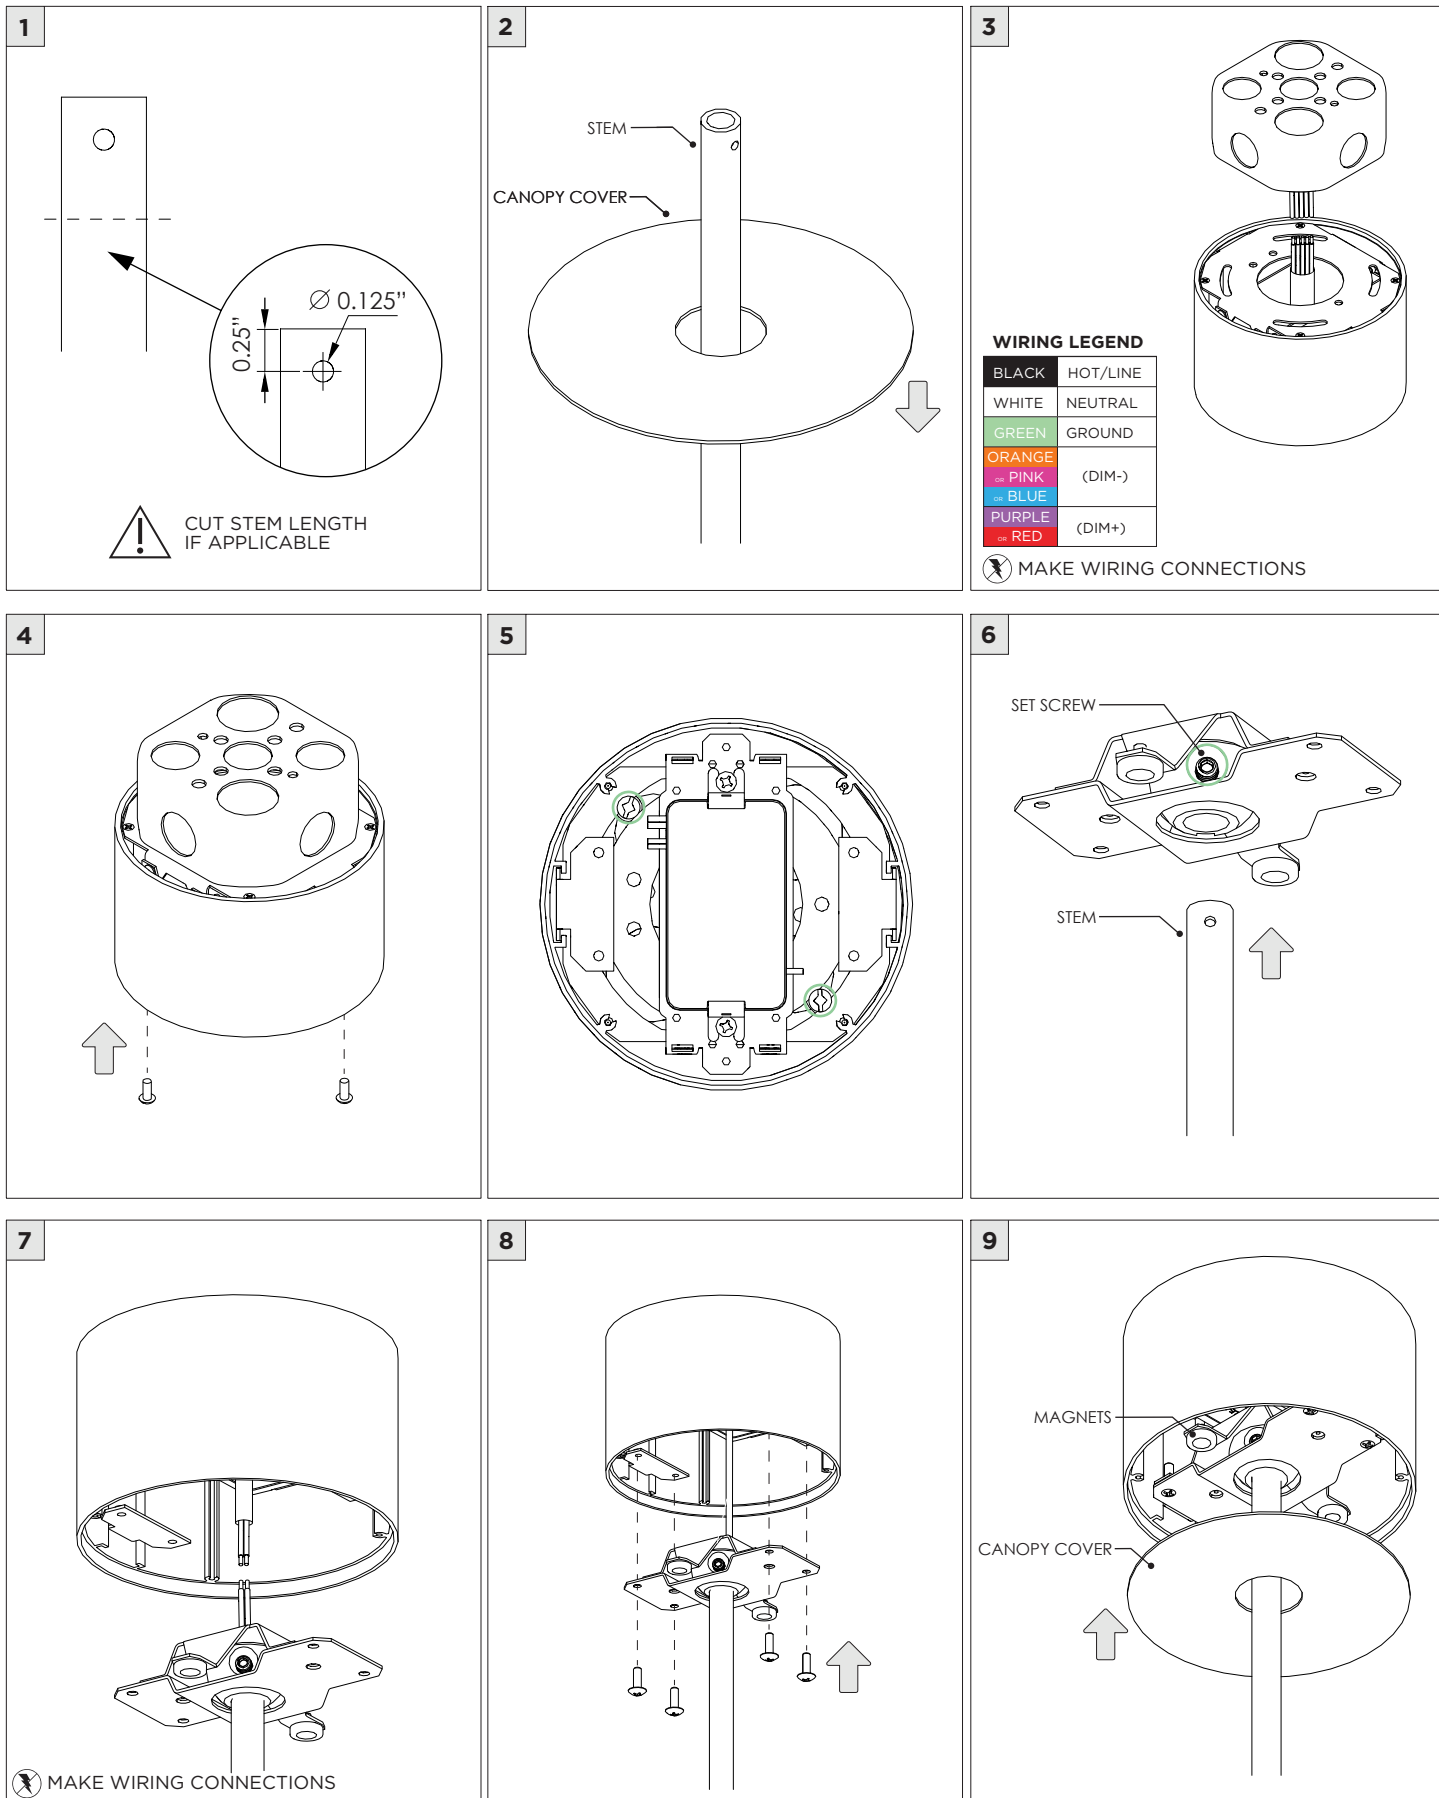


1 CONDUIT FEED CANOPY

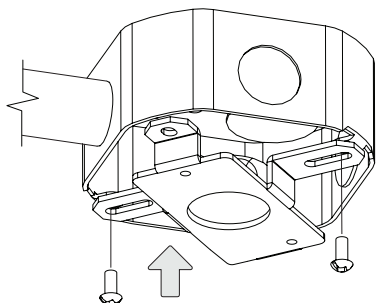

2

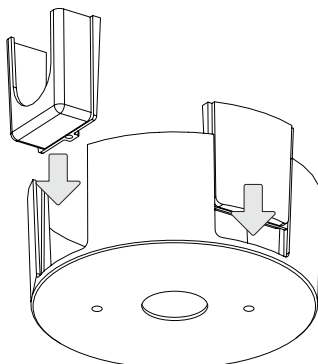


3

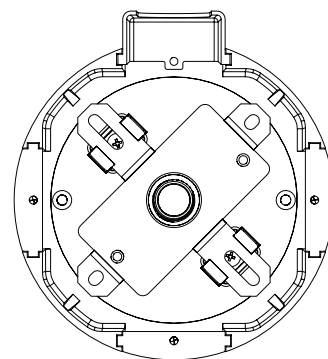


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

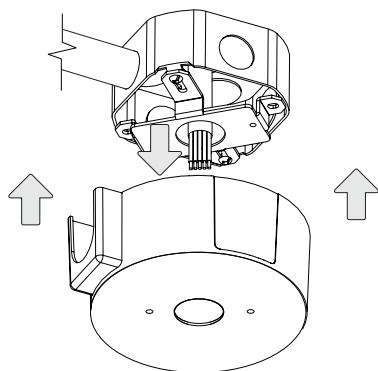


CONNECT CONDUIT CANOPY AND FEED
JUNCTION BOX WIRES THROUGH HOLE

5

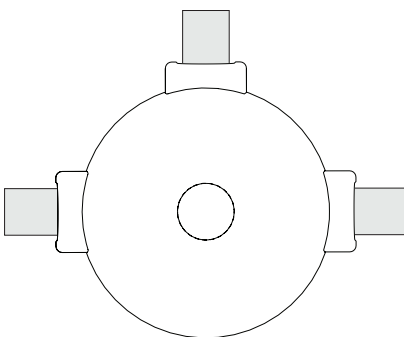

! CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

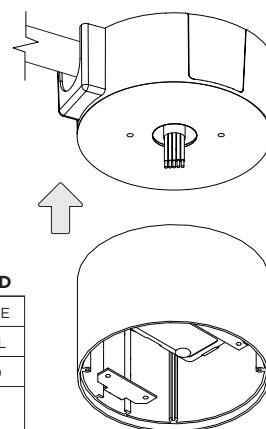


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PINK	(DIM-)
BLUE	(DIM-)
PURPLE	(DIM+)
RED	(DIM+)

! MAKE WIRING CONNECTIONS

7

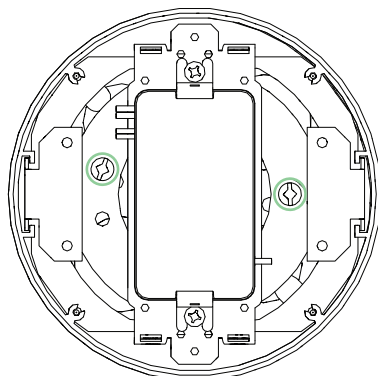






8

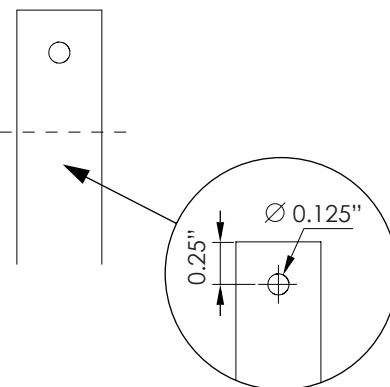


! CUT STEM LENGTH
IF APPLICABLE

9

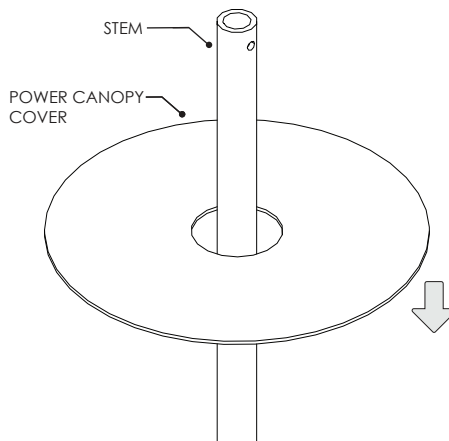


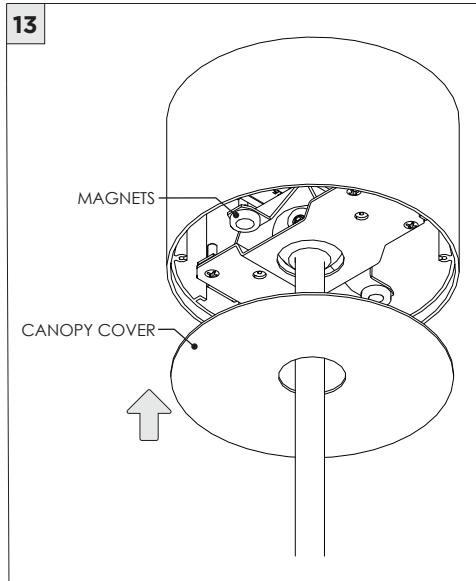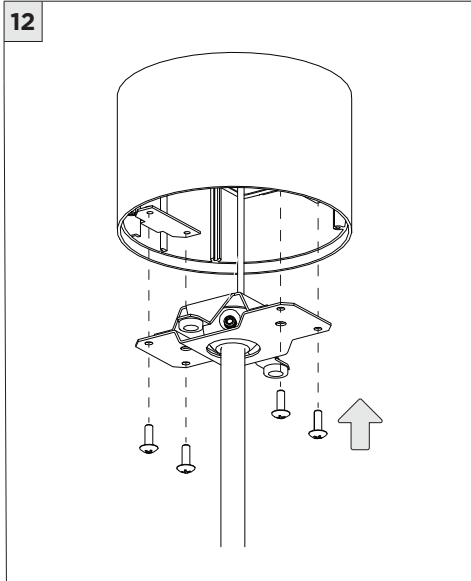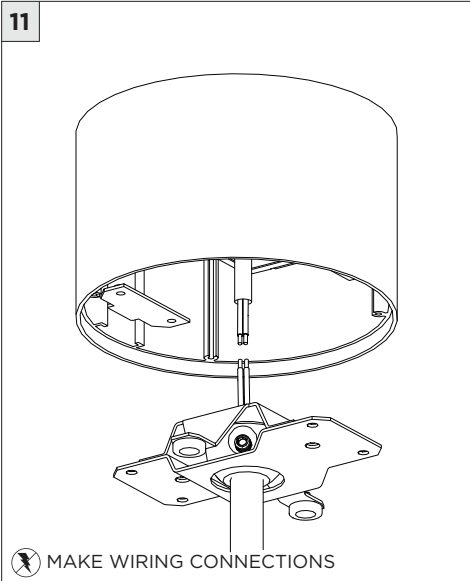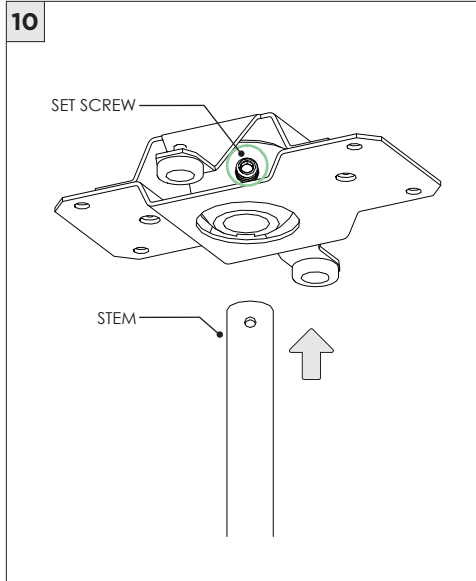

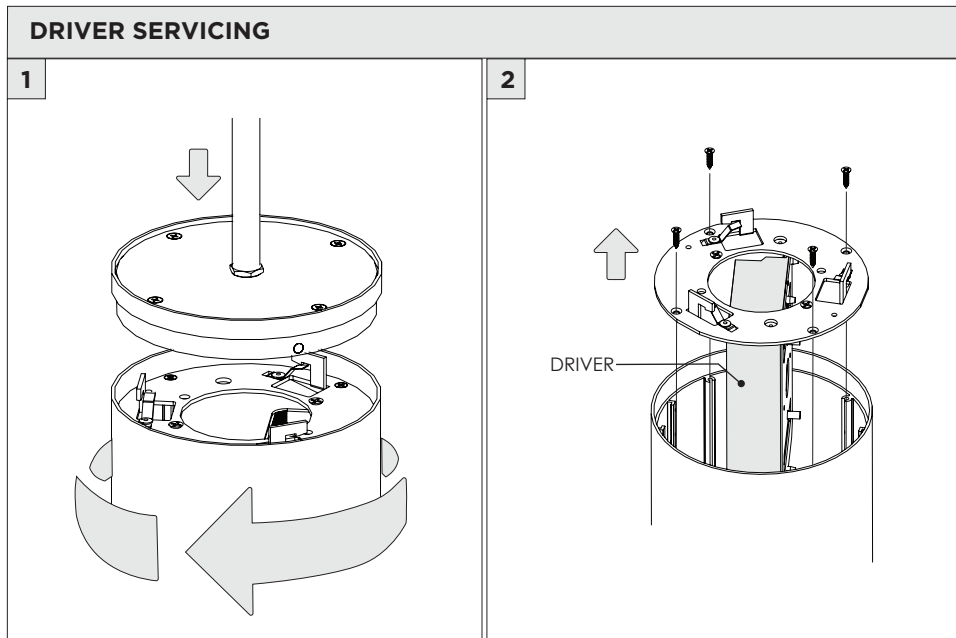


DRIVER SERVICING


1

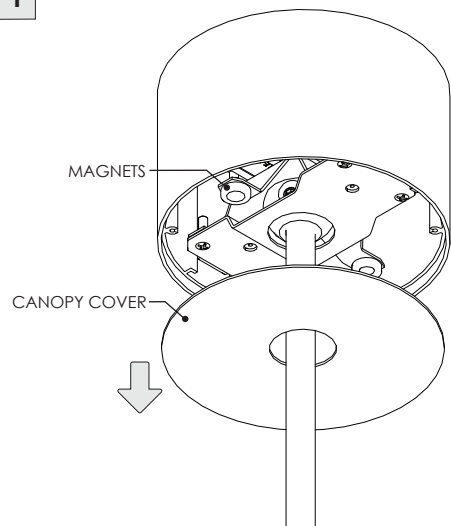

2

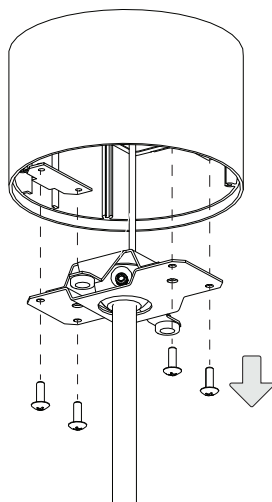


3

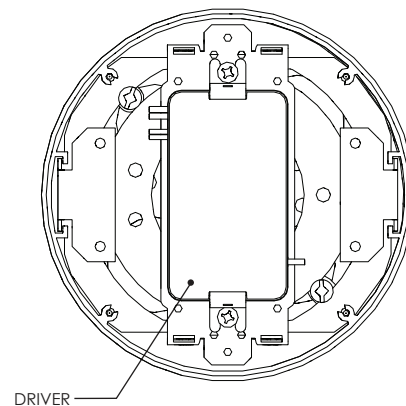


LED SERVICING

1

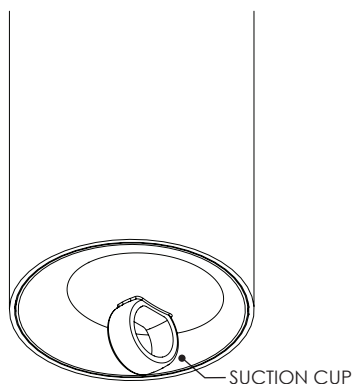


2

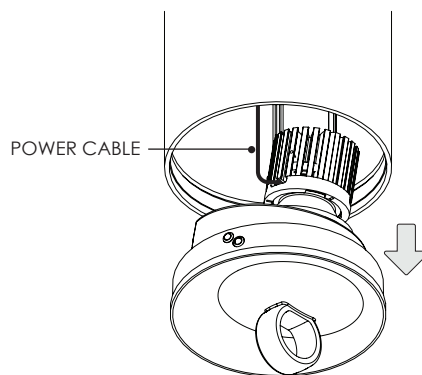


ENSURE TO DISCONNECT POWER CABLE


3

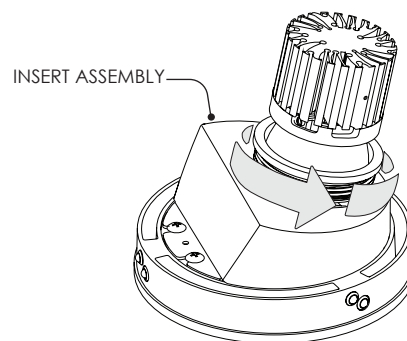


4 REPLACE LED ASSEMBLY

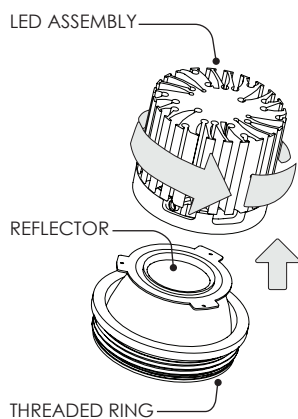

5

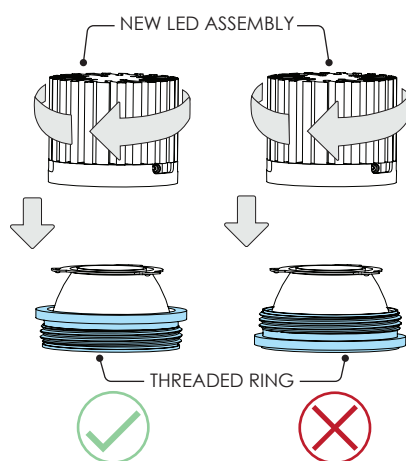


6




ENSURE THE HEAT SINK IS ALIGNED WITH INSERT ASSEMBLY AND FULLY TIGHTEN THE THREADED RING

7

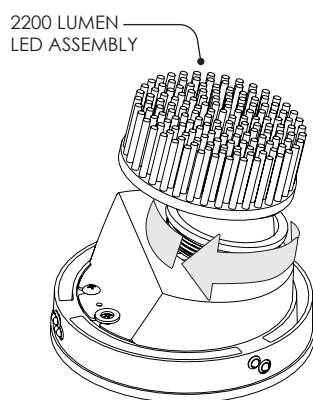


FOR 2200 LUMEN FIXTURES

7A

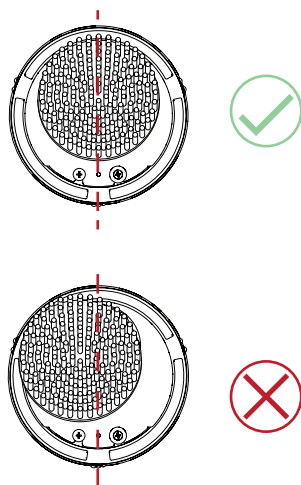

8

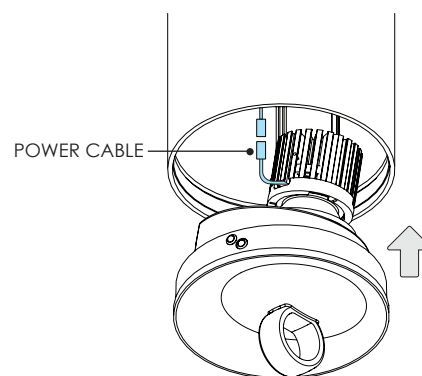

EXACT LED MODEL MAY VARY