

3Gi-4PSL-D

3.5" INTEGRATED PENDANT SLOT
DIRECT

SPECIFY PRODUCT USING ONLINE CONFIGURATOR

3.5" aperture with one piece extruded aluminum housing

Individual or continuous runs available. See online configurator


Direct distribution with multiple source options and various lumen outputs

Integrated options include Micro Madison dual axis gimbals, fixed downlights, and adjustable linear Zoie

Extruded acrylic lens available in flush, 1" and 2" drop lens options

Asymmetric optics available

1% dimming standard with several driver options

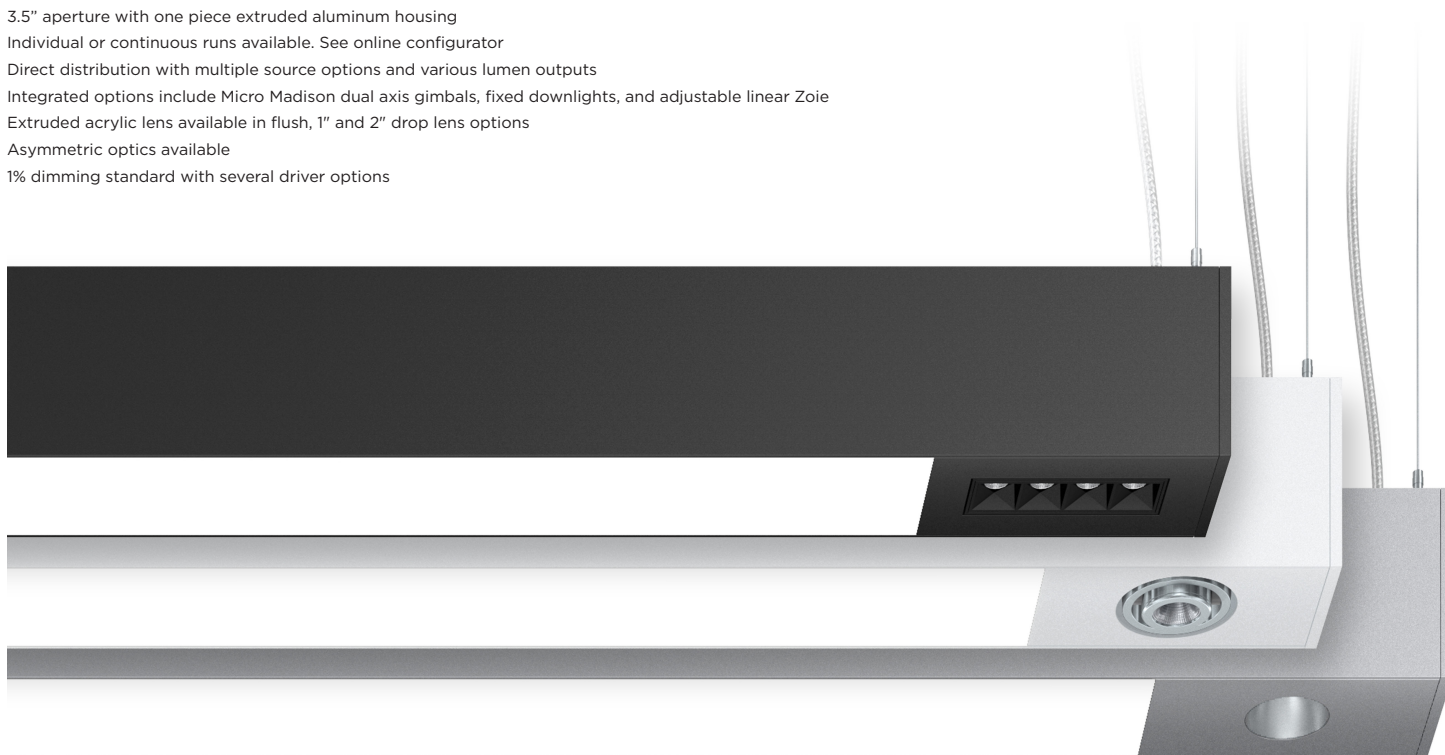


INTEGRATED OPTIONS

3.5" LINIA DIRECT



MICRO MADISON



2" FIXED DOWNLIGHT



4" ADJUSTABLE ZOIE



CONFIGURATION OPTIONS (SPECIFY PRODUCT USING ONLINE CONFIGURATOR)

SE - START- END

Integrated options located at start and end of run only. Available in 1' increments starting at 4'. See online configurator for length options





OC - ON CENTER SPACING

Integrated options with on center spacing starting at 4'(OC4) through 8' (OC8). See online configurator for run length options



4LI - 3.5" LINIA DIRECT

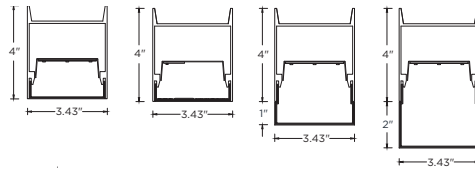




APERTURE SIZE: 3.43"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 90+

DELIVERED LUMENS: 250 - 1000 LM/FT
EFFICACY: 111 - 116 LPW *
WATTAGE: 2.1 - 8.9 W/FT *

OPTICS: FLUSH,
1" - 2" DROP LENS,
ASYMMETRIC

* Based on 90+ CRI and 3500 K

M3 - MICRO MADISON

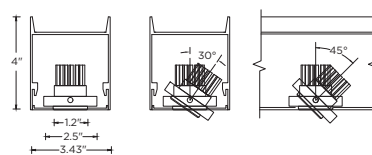

APERTURE SIZE: 1.2"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 95+



DELIVERED LUMENS: 700 - 1200 LM
EFFICACY: 116 - 120 LPW *
WATTAGE: 5.9 - 10.4 W *

OPTICS: 30°, 45°, 65°

ADJUSTABILITY: 30° X 45°

* Based on 95+ CRI, 45° and 3500K

DF5 - 2" DOWNLIGHT

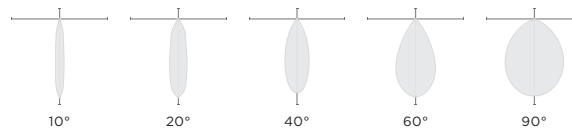



APERTURE SIZE: 1.8"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 90+

DELIVERED LUMENS: 893 - 1232 LM
EFFICACY: 89 LPW *
WATTAGE: 10.2 - 22.0 W *

OPTICS: 10°, 20°, 40°, 60°, 90°

* Based on 90+ CRI, 60° and 3500K

Z4A - 4" ADJUSTABLE ZOIE



APERTURE SIZE: 1.0"
COLOR TEMP: 27K, 30K, 35K, 40K
CRI: 90+

DELIVERED LUMENS: 500 - 1000 LM
EFFICACY: 94 - 97 LPW *
WATTAGE: 5.6 - 10.9 W *

OPTICS: 15°, 35°, 55°

ADJUSTABILITY: 30°

* Based on 90+ CRI, 35° and 3500K

OPTICS & ADJUSTABILITY

3.5" LINIA DIRECT

Extruded, satin acrylic lens designed for optimal performance and glare control
Lens options include flush, 1" and 2" drops with illuminated end caps for all drop lenses
High performance asymmetric optics available

MICRO MADISON

1.2" diameter, regressed LED source for enhanced glare control
Proprietary, high performance reflectors. Field replaceable
Available in 30°, 45° and 65°
Solid, machined aluminum double gimbal with dual axis adjustability (30° X 45°)

2" FIXED DOWNLIGHT

Small 1.8" diameter, high performance downlight
Regressed LED source for enhanced glare control
Proprietary anodized, aluminum reflectors
Available in 10°, 20°, 40°, 60° and 90°

4" ADJUSTABLE ZOIE

4" high performance Zoie downlights with single axis adjustability of 30°
1" apertures with matte black or matte white multi-faceted louvers
Regressed LED source for enhanced glare control
Proprietary polycarbonate multi-faceted reflectors
Available in 15°, 35° and 55°
UGR <16

HOUSING

Extruded aluminum housing with a 3.5" aperture
Die cast aluminum end caps add 1/4" to each end of the luminaire
24-gauge LED reflector with high reflectance white powder-coated finish
Standard polyester powder coated matte white finish. Optional finishes available
Integrated options feature an extruded aluminum faceplate with powder coated finish

MOUNTING

Toolless installation with 3G's proprietary mounting system
Internal, toolless joiner system (latch and hook) easily connects multiple sections together
LED reflectors remain in each section during installation with 3G's locking spring system
Adjustable aircraft cable suspension with locking fasteners (60" length standard)
Standard, 18-gauge, 5 conductor single circuit power feed (clear braided finish)
All mounting canopies provided in white finish as standard
Suitable for various architectural ceilings (see mounting details)
Fixture weight: +/- 3.7 lb/ft

LED SYSTEM

3.5" LINIA DIRECT

Proprietary LED system with color consistency < 3 SDCM
Available in 27K, 30K, 35K, and 40K
Standard 90+ CRI with R9 value of 56
L90 > 60,000 hours

DOWNLIGHTS

Citizen LED module (field replaceable)
Available in 27K, 30K, 35K, and 40K
Standard 90+ CRI
Color consistency < 2 SDCM
L90 > 50,000 hours

4" ADJUSTABLE ZOIE

Osram LED source
Available in 27K, 30K, 35K, and 40K
Standard 90+ CRI
Color consistency < 2 SDCM
L90 > 60,000 hours

ELECTRICAL


Luminaires are pre-wired with factory installed quick connects and branch circuit wiring
Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
All drivers are integral and easily accessible through luminaire aperture

LISTING




ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0.
Rated for indoor dry or damp locations

WARRANTY

5 Year Warranty on LED and drivers Manufacturer
1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

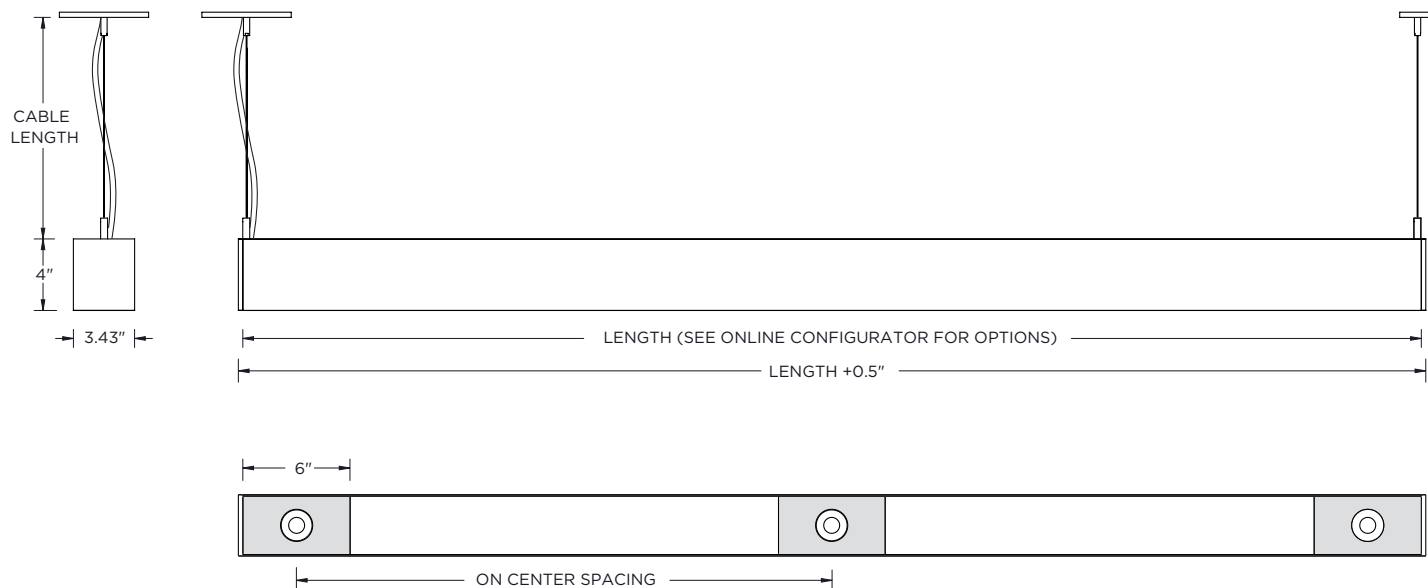

INSTALLATION & MOUNTING

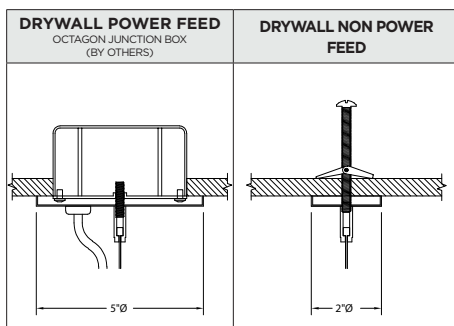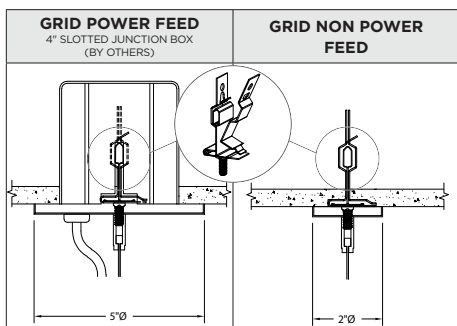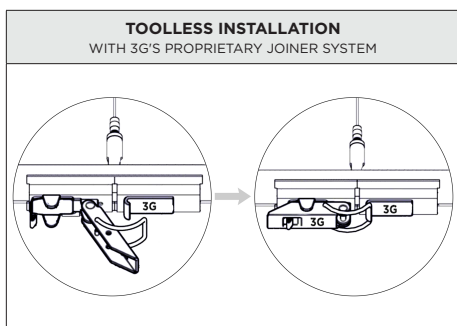

3.5" LINIA DIRECT - BASED ON 90+ CRI AND 3500K SOURCE

LENS OPTION	DELIVERED LUMENS (LM/FT)	SYSTEM WATTS (W/FT)	EFFICACY (LPW)
FLUSH	250	2.1	116
	500	4.3	116
	750	6.6	114
	1000	8.9	111
1" DROP	250	2.1	120
	500	4.3	121
	750	6.6	119
	1000	8.9	115
2" DROP	250	2.1	122
	500	4.3	123
	750	6.6	121
	1000	8.9	116
ASYMMETRIC	250	2.1	118
	500	4.3	119
	750	6.6	115
	1000	8.9	112

COLOR TEMP	
2700K	0.94
3000K	0.97
3500K	1.00
4000K	1.01

MICRO MADISON - BASED ON 65°, 90+ CRI AND 3500K SOURCE (PER FIXTURE HEAD)

LUMEN OUTPUT	LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
700 LM	700	700	5.9	120
1000 LM	1000	1000	8.4	119
1200 LM	1200	1200	10.4	116

COLOR TEMP	
2700K	1.12
3000K	1.11
3500K	1.00
4000K	1.01

2" FIXED DOWNLIGHT - BASED ON 60°, 90+ CRI AND 3500K SOURCE (PER FIXTURE HEAD)

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000 LM	893	10.2	88
1500 LM	1232	13.9	89

COLOR TEMP	
2700K	0.94
3000K	0.97
3500K	1.00
4000K	1.01

4" ADJUSTABLE ZOIE - BASED ON 35°, 90+ CRI AND 3500K SOURCE

FIXTURE TYPE	LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
4" ZOIE	500	506	6.2	81
	1000	1000	13.0	77

COLOR TEMP	
2700K	0.92
3000K	0.97
3500K	1.00
4000K	0.98