
3G-DL33RF-SC

3" ROUND FIXED DOWNLIGHT
SPECIALTY CEILINGS

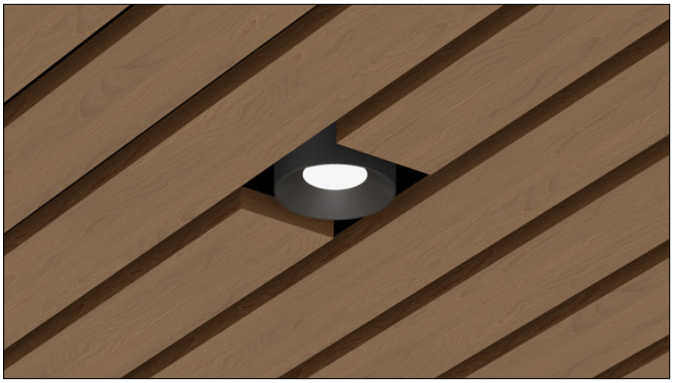


3" diameter fixed downlight with upgraded performance
Designed for integration with various specialty ceilings
Standard 95+ CRI LED system with performance up to 144 LPW
Delivered lumen range up to 3000lm at 95+ CRI
Regressed LED source for enhanced glare control
10° to 90° beam angle options suitable for various applications
Title 24 JA8 certified with maximum 1500lm output
Companion to 3G's Cylinder product family

JA8 TITLE 24

CEILING TYPES


TEGULAR PANEL






LINEAR TEGULAR PANEL






3.25"W LINEAR PANEL






5.25"W LINEAR PANEL





OPTICS

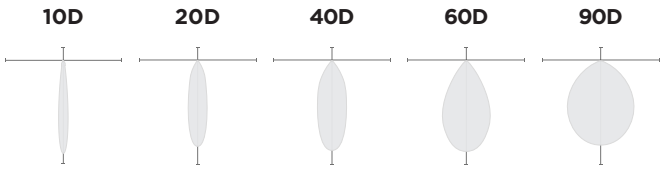


PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	1000	8.6	116
1500	1500	13.5	111
2000	2000	18.3	109
2500	2500	25.8	97
3000	3000	31.2	96

BASED ON 95+ CRI, 3500K, 40D OPTIC WITH SOFTENING LENS
Lumen output and actual wattage may vary +/- 5%

STANDARD FINISHES

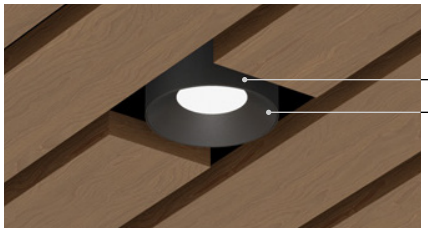

BLACK COLLAR FINISH
BLACK BEVELED INSERT

3G LIGHTING

3G-DL33RF-SC
3" ROUND FIXED DOWNLIGHT - SPECIALTY CEILINGS

ORDERING INFORMATION

PROJECT:		**TYPE:**			
CATALOG#:		**DATE:**		**QTY:**	

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3G-DL33RF-SC	**10 -** 1000 LUMENS **15 -** 1500 LUMENS **20 -** 2000 LUMENS **25 -** 2500 LUMENS **30 -** 3000 LUMENS *All lumen outputs are delivered lumens at 95+ CRI	**H95 -** 95+ CRI	**27K -** 2700K **30K -** 3000K **35K -** 3500K **40K -** 4000K	**10D -** 10° [1] **20D -** 20° [1] **40D -** 40° **60D -** 60° **90D -** 90° * *90D optic supplied with lens Not available with other lens options	**UNV -** 120/277V **120 -** 120V **347 -** 347V [2]

DRIVER	COLLAR FINISH	BEVELED INSERT	HOUSING TYPE
DIM - 0-10V (100-1%) **LE -** PHASE DIM [3] (TRIAC/ELV, 100-1%) **D01 -** 0-10V (100-0.1%) **DALI -** DALI (100-1%) [4] **DMX -** DMX (100-0%) **DHL2 -** LUTRON HI-LUME LDE1 (1% ECOSYSTEM)	**BK -** BLACK (STANDARD) **SV -** SILVER	**BI -** BLACK **WI -** WHITE **SI -** SILVER	**SH -** SHALLOW HOUSING [5] (CP RATED) **NC -** NEW CONSTRUCTION HOUSING (CP RATED) All housings ship with C-channel bar hangers

OPTIONS
SF - SOFTENING LENS (SUPPLIED STANDARD) **SB -** SANDBLASTED LENS **LS -** LINEAR SPREAD LENS **CP -** CHICAGO PLENUM [6] **EMR -** REMOTE EMERGENCY BATTERY (REMOTE) [7] *Softening lens not provided with 90D optic Maximum 1 optical accessory

1 10D and 20D reflector available up to 2000lm
2 347 available in "DIM" 0-10V only (100-1%)
3 Phase dimming options available in 120V only
4 DALI-2 (Type 6) provided as standard
5 Shallow Housing available up to 2000lm
6 Chicago Plenum option available with Shallow Housing (2000lm max) and New Construction Housing
7 Supplied with enclosure with Emergency Battery and driver. Installed remotely by others. Not accessible through fixture aperture

JA8 TITLE 24
JA8 (Title 24) Listing available with 1500lm maximum
Driver options include "DIM" (0-10V) and "LE" (Phase dimming)

PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	1000	8.6	116
1500	1500	13.5	111
2000	2000	18.3	109
2500	2500	25.8	97
3000	3000	31.2	96

BASED ON 95+ CRI, 3500K, 40D OPTIC WITH SOFTENING LENS
Lumen output and actual wattage may vary +/- 5%

MULTIPLIERS

BEAM ANGLE	
10D	0.92
20D	1.24
40D	1.00
60D	0.97
90D	0.91

COLOR TEMP	
2700K	0.98
3000K	1.00
3500K	1.00
4000K	1.02

HOUSING

Shallow housing and new construction housing options available
Maximum ceiling thickness of 1.5". Consult factory for modifications
Housings rated for #12 AWG (4 in, 4 out), 90°C conductors and through branch wiring

BEVELED INSERT

Cast aluminum beveled insert with matte powder coated finish
3" aperture with regressed LED source for enhanced glare control

OPTICS

Proprietary anodized, aluminum reflectors
Beam angle available in 10°, 20°, 40°, 60° and 90°
Reflectors are field replaceable (10° reflector not interchangeable)
Softening lens supplied standard

LED SYSTEM

Standard 95+ CRI
Color consistency <2 SDCM
Available in 27K, 30K, 35K, and 40K
L90 > 50,000 hours

ELECTRICAL

Standard 0-10V, constant current drivers
100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
Integral drivers are easily accessible through luminaire aperture

EMERGENCY

7W output for 90 minutes (+/- 800lm at 95+ CRI). Title 24 Certified
Remote emergency battery (not accessible through fixture aperture)
Maximum remote mounting distance:
3000lm or below - 50ft (12AWG) or 25ft (14AWG)
Above 3000lm - 30ft (12AWG) or 20ft (14AWG)
Caution: Emergency Battery utilizes more than one power source and servicing should be performed by qualified personnel

MOUNTING

All housing options ship with adjustable C-Channel bar hangers
Designed for integration with various wood ceiling systems
Infill panel accessory available with ceiling manufacturer (supplied by others)

LISTING

ETL listed and conforms to UL1598 standard
Certified to CSA22.2 NO.250.0.
JA8 (Title 24) Listed
Rated for dry or damp locations


WARRANTY

5 year limited warranty
LED system rated for operation in ambient environments up to 25°C

3G-DL33RF-SC


3" ROUND FIXED DOWNLIGHT - SPECIALTY CEILINGS

TEGULAR PANEL (CEILING SYSTEM BY OTHERS)

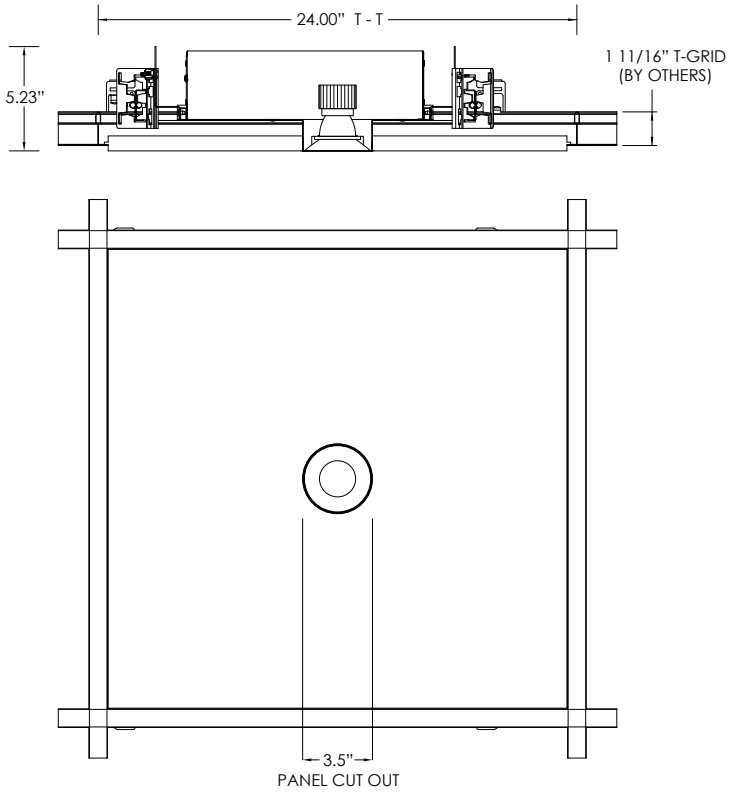

COMPATIBLE CEILING SYSTEMS	
MANUFACTURER	**PART NUMBER**
ARMSTRONG	5404F01, 5404F02, 6484F01, 6484F02, 6485F01, 6485F02, 6486F01, 6486F02, 6487F01, 6487F02, 6510F01, 6510F02, 6511F01, 6511F02, 6512F01, 6512F02


SH - SHALLOW HOUSING

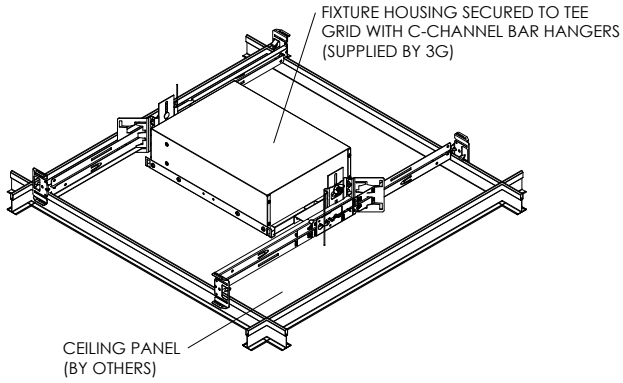


PLEASE NOTE: FIXTURE INSTALLATION MUST BE COORDINATED WITH CEILING PANEL INSTALLATION TO ENSURE FIXTURE ACCESSIBILITY CEILING SYSTEM AND 5/8" THICK INFILL PANEL (BY OTHERS)

HOUSING TYPES


SH - SHALLOW HOUSING (CP RATED) (2000LM MAX)

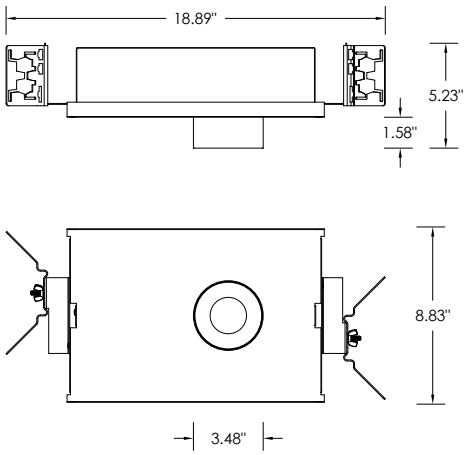

NC - NEW CONSTRUCTION HOUSING (CP RATED)

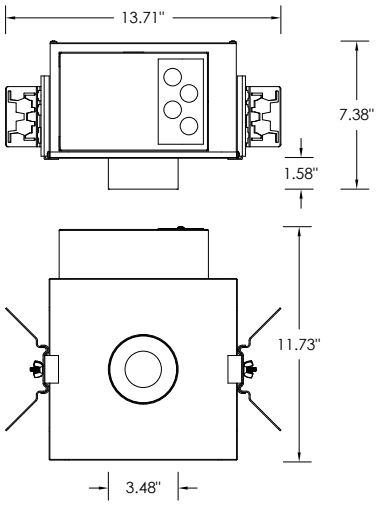


LINEAR TEGULAR (CEILING SYSTEM BY OTHERS)

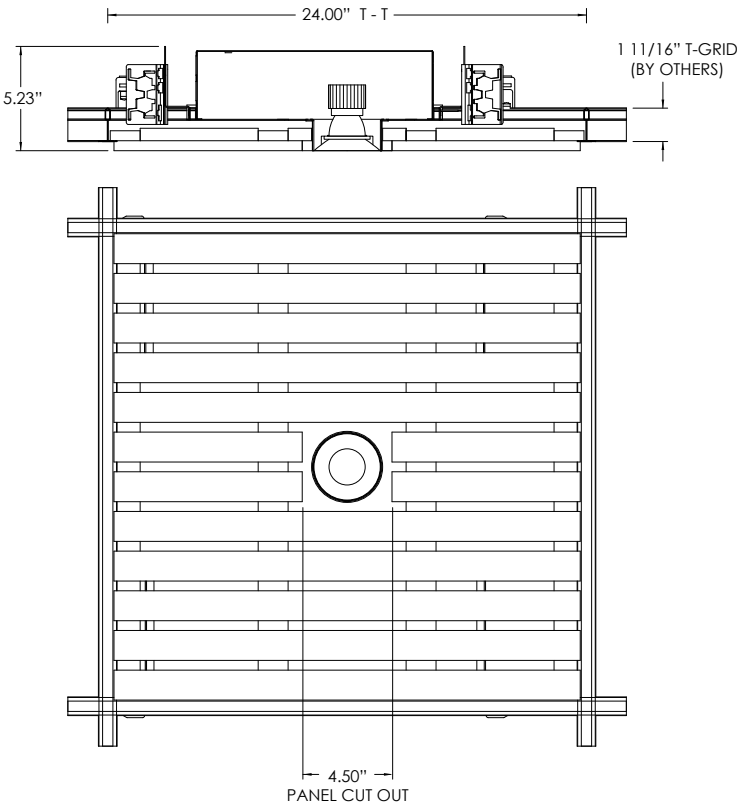

COMPATIBLE CEILING SYSTEMS	
MANUFACTURER	**COMPATIBLE PART NUMBER**
ARMSTRONG	6733F51L2T9, 6733F51L4T9, 6733F51L2T5, 6733F51L4T5


SH - SHALLOW HOUSING

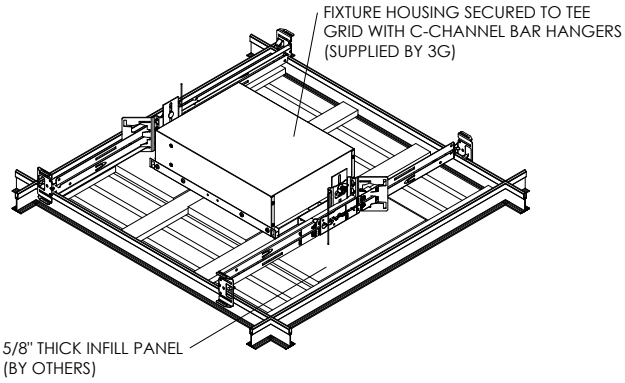


PLEASE NOTE: FIXTURE INSTALLATION MUST BE COORDINATED WITH CEILING PANEL INSTALLATION TO ENSURE FIXTURE ACCESSIBILITY CEILING SYSTEM AND 5/8" THICK INFILL PANEL (BY OTHERS)

HOUSING TYPES


SH - SHALLOW HOUSING (CP RATED) (2000LM MAX)

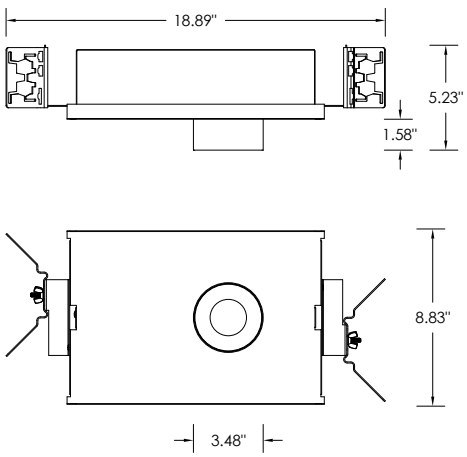


NC - NEW CONSTRUCTION HOUSING (CP RATED)

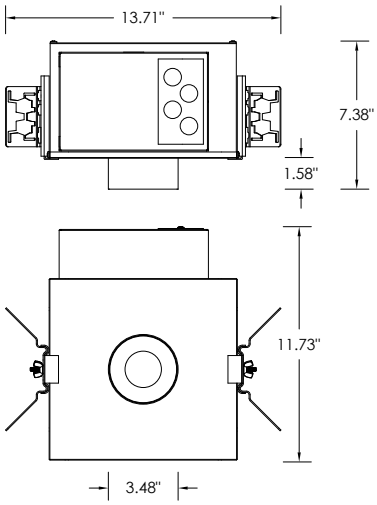


3.25" LINEAR PANEL (CEILING SYSTEM BY OTHERS)

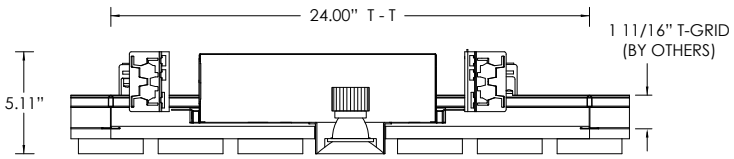

COMPATIBLE CEILING SYSTEMS	
MANUFACTURER	**COMPATIBLE PART NUMBER**
ARMSTRONG	8176W1
9WOOD	2114-2, 2114-3

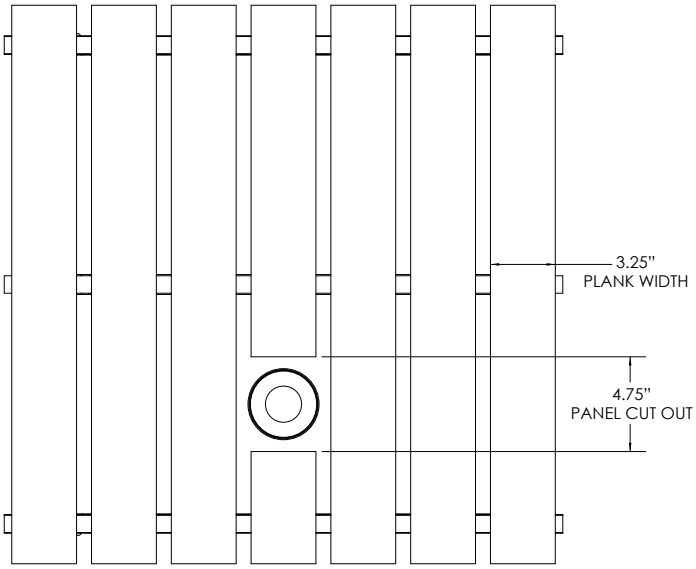


SH - SHALLOW HOUSING

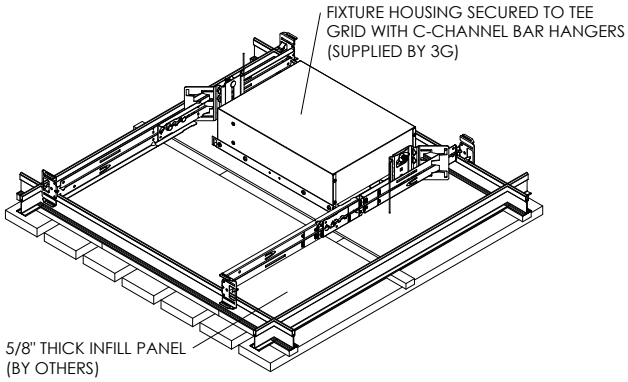


PLEASE NOTE: FIXTURE INSTALLATION MUST BE COORDINATED WITH CEILING PANEL INSTALLATION TO ENSURE FIXTURE ACCESSIBILITY CEILING SYSTEM AND 5/8" THICK INFILL PANEL (BY OTHERS)

HOUSING TYPES


SH - SHALLOW HOUSING (CP RATED) (2000LM MAX)

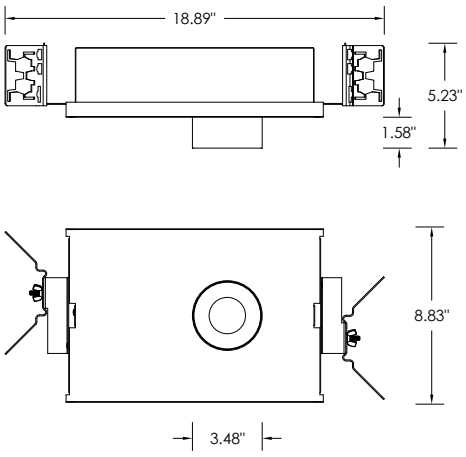


NC - NEW CONSTRUCTION HOUSING (CP RATED)

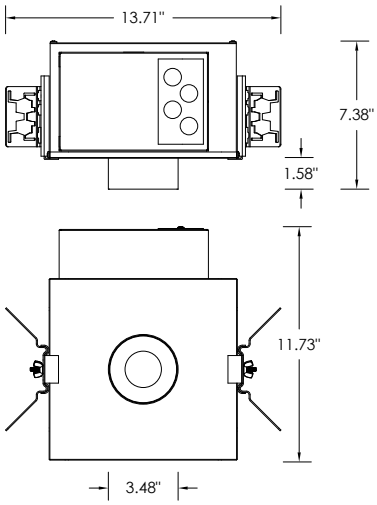


5.25" LINEAR PANEL (CEILING SYSTEM BY OTHERS)

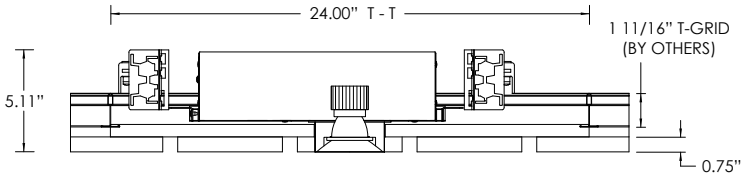

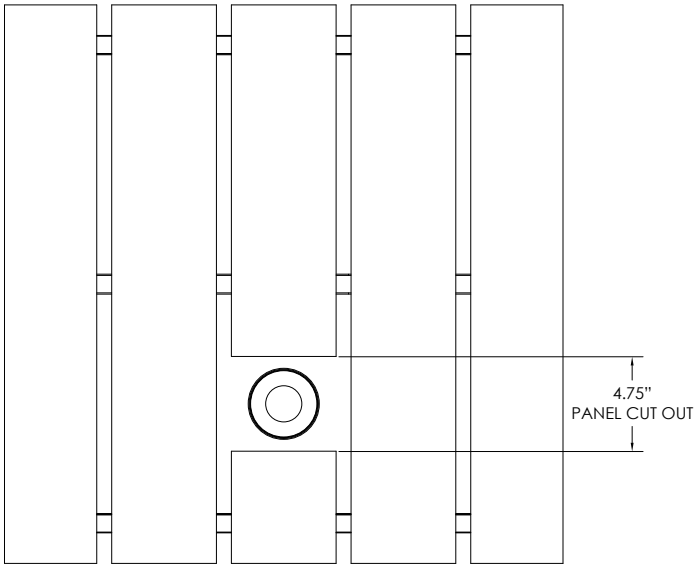

COMPATIBLE CEILING SYSTEMS	
MANUFACTURER	**COMPATIBLE PART NUMBER**
ARMSTRONG	8177W1
9WOOD	2116-2


SH - SHALLOW HOUSING

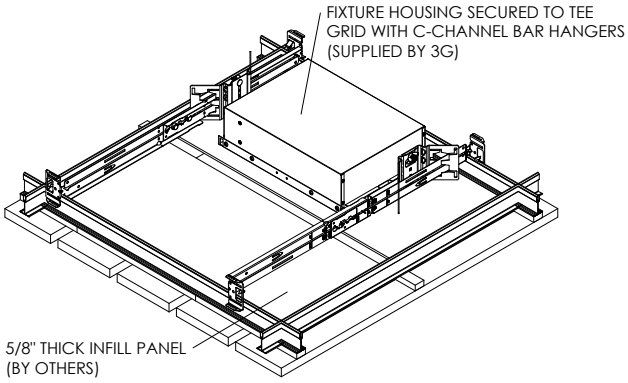


PLEASE NOTE: FIXTURE INSTALLATION MUST BE COORDINATED WITH CEILING PANEL INSTALLATION TO ENSURE FIXTURE ACCESSIBILITY CEILING SYSTEM AND 5/8" THICK INFILL PANEL (BY OTHERS)

HOUSING TYPES

SH - SHALLOW HOUSING (CP RATED) (2000LM MAX)

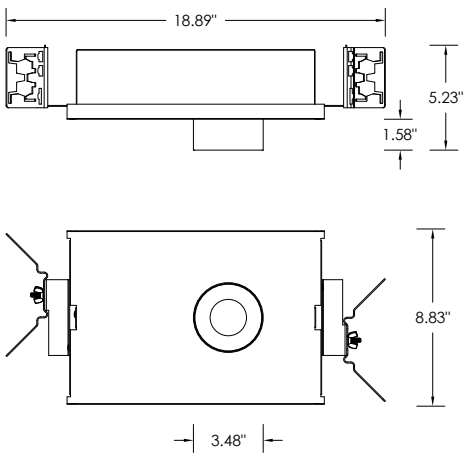

NC - NEW CONSTRUCTION HOUSING (CP RATED)

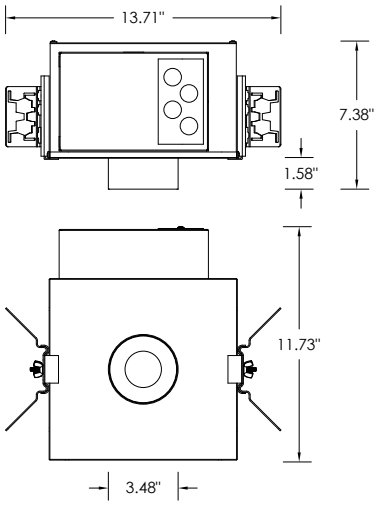

Declare® is a product transparency program administered by the International Living Future Institute (ILFI), providing standardized disclosure of product ingredients, manufacturing location, service life, end-of-life pathways, and Living Building Challenge compliance status.

PRODUCT FAMILY COVERAGE — DOWNLIGHTS

Recessed downlights for general, accent, and wall wash applications. Available in fixed and adjustable configurations with multiple beam angles, lumen packages, 95+ CRI as standard, low-glare/UGR-rated options, and multiple trim conditions. Options include adjustable modules, dual-axis gimbals, and low-glare multicell optics.

LBC RED LIST FREE

This product family carries a Declare® designation of LBC Red List Free, the highest designation within the Declare program. Products with this designation contain no intentionally added Red List chemicals above applicable Declare reporting thresholds and have been evaluated against the Living Building Challenge Red List.

Red List Free

INTERNATIONAL LIVING FUTURE INSTITUTE℠

BUILDING CERTIFICATION PROGRAMS

Material transparency documentation is increasingly requested as part of building certification programs and owner standards. Declare labels may be used as supporting documentation for project teams pursuing:

- Living Building Challenge (LBC)
- WELL Building Standard™ v1
- WELL Building Standard™ v2
- LEED®
- Other material disclosure and material health initiatives

Project certification requirements are determined at the building level and should be evaluated by the project team.

Declare℠

Downlight Products
3G Lighting

Final Assembly: Woodbridge, Ontario, Canada
Life Expectancy: 7+ Year(s)
End of Life Options: Recyclable (95%), Landfill (5%)

Ingredients:

Steel, cold roll UNS G10080; Aluminum UNS A96063; Aluminum; Pulp, cellulose; Nylon 6; 2-Propenoic acid, butyl ester, polymer with ethenylbenzene and 2-propenenitrile; Carbonic dichloride, polymer with 4,4′-(1-methylethylidene)bis[phenol]; Paper; Soda lime; Starch, base-hydrolyzed, borated; Magnesium; 2,4,8,10-Tetraoxa-3,9-diphosphaspiro[5.5]undecane, 3,9-bis[2,4-bis(1,1-dimethylethyl)phenoxy]-; Silicon; Vinyl acetate; 1,3-Propanediol, 2-ethyl-2-(hydroxymethyl)-; Chromium, metallic

Living Building Challenge Criteria: Compliant

I-13 Red List:
■ LBC Red List Free
□ LBC Red List Approved
□ Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

GLG-0004
EXP. 01 JUN 2027
Original Issue Date: 2026

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare