





**3.3" WALL WASH
CYLINDER**
SURFACE MOUNT

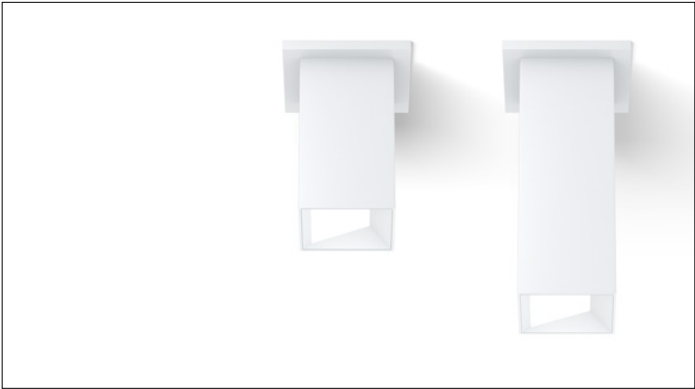


COMPONENTS

STANDARD CANOPY

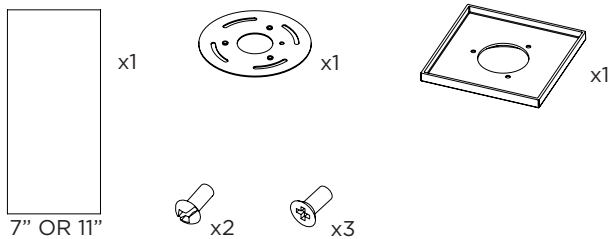

4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

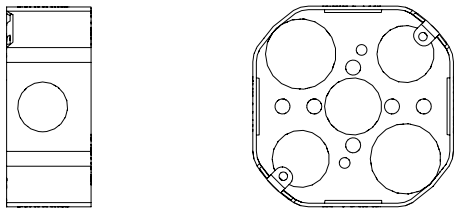






JUNCTION BOX (BY OTHERS)

INSTRUCTION KEY

INFORMATION


- ⚠️ ADDITIONAL
- ⓘ ATTENTION
- ⚡ POWER ON
- ⏻ POWER OFF

INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
TURN OFF POWER DURING INSTALLATION OR SERVICING

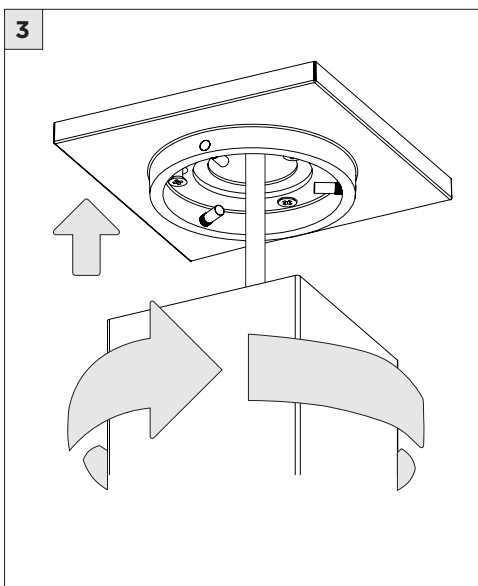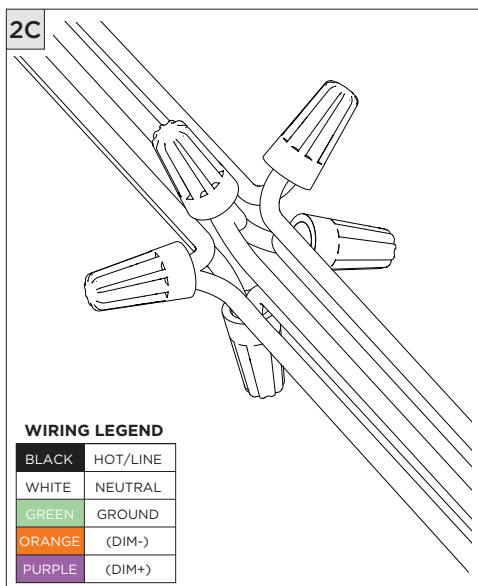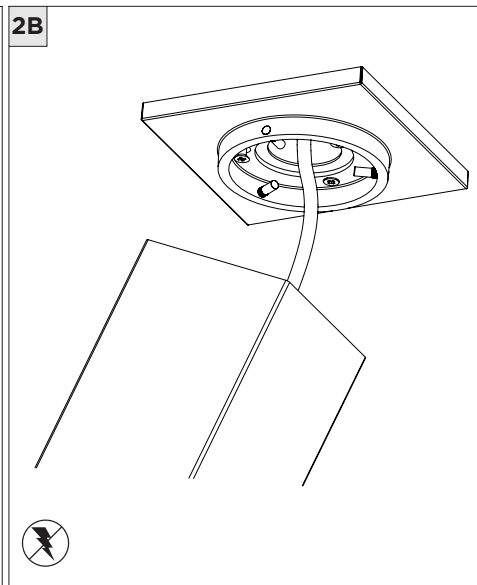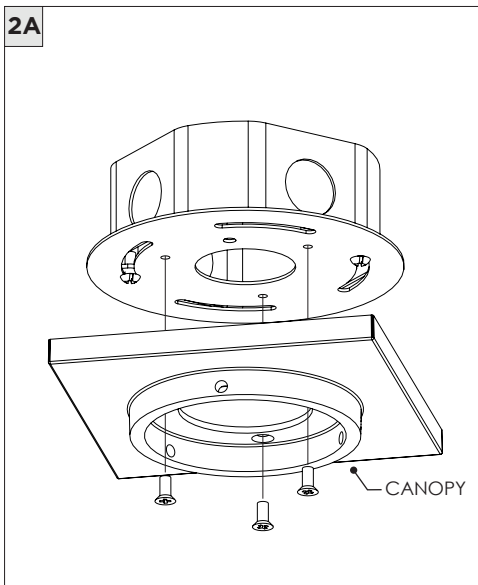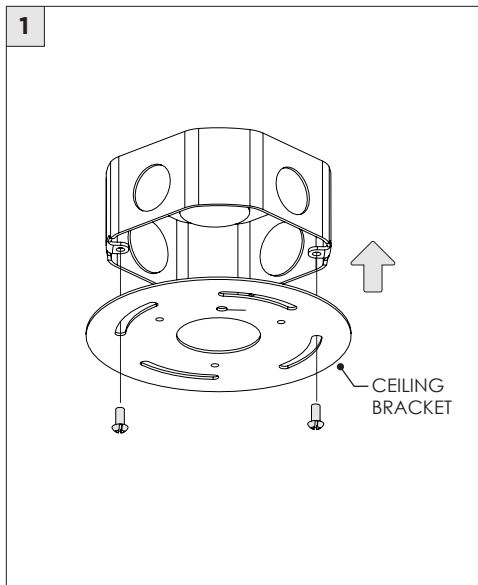


DRIVER SERVICING


1

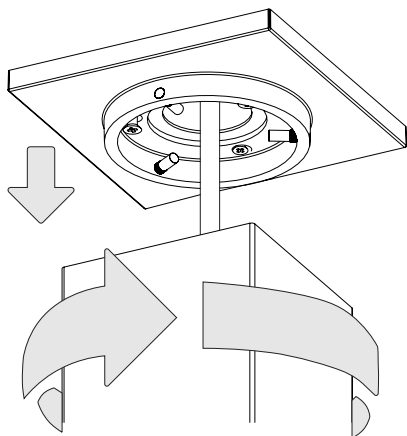

2

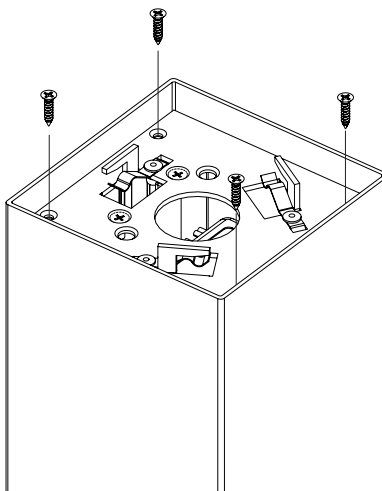


3

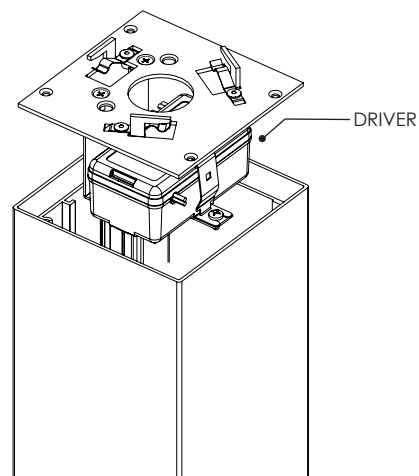


LED SERVICING

1

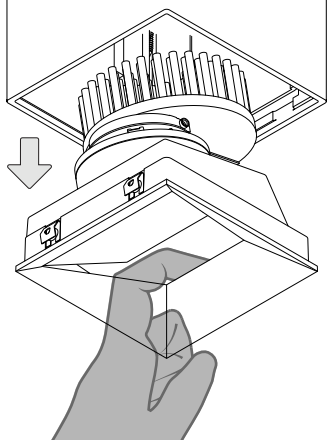


DISCONNECT LED WIRES AND REMOVE LED INSERT

2

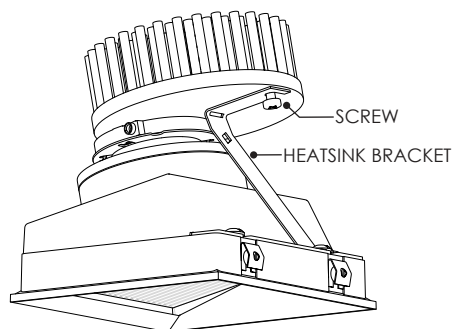

LOOSEN HEATSINK BRACKET SCREW

3

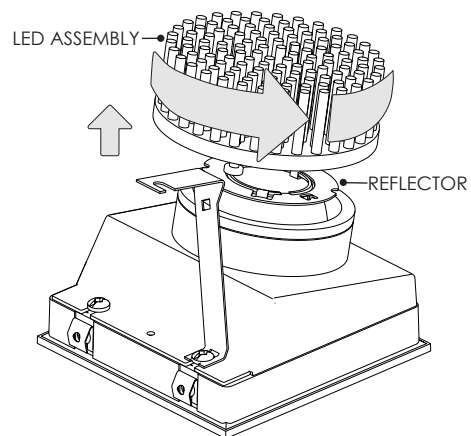

TWIST AND REMOVE LED ASSEMBLY
FROM REFLECTOR