

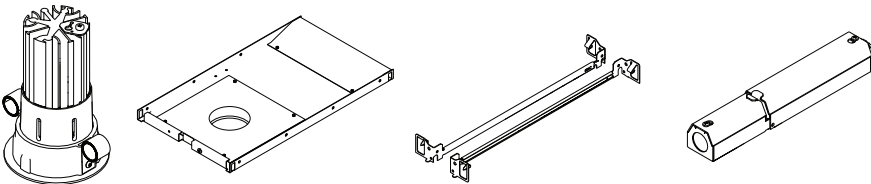


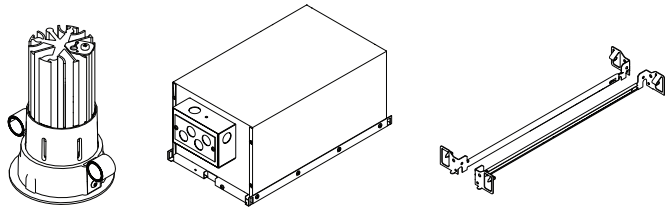

THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
RMD - REMODEL  LED INSERT DRIVER ENCLOSURE	NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)  LED INSERT NEW CONSTRUCTION FRAME BAR HANGERS DRIVER ENCLOSURE
NC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)  LED INSERT NEW CONSTRUCTION HOUSING BAR HANGERS	

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ℹ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
⚡ POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
🔌 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING


RMD - REMODEL

1




FIXTURE TYPE	CEILING HOLE SIZE
DL20RF	Ø 2.625"

2

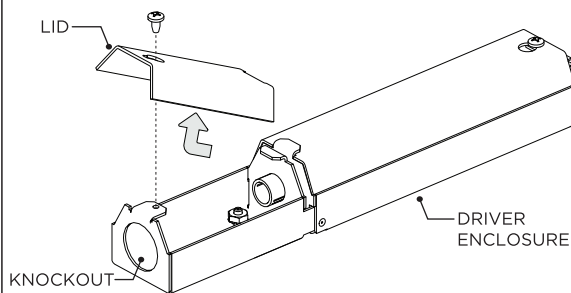

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

3

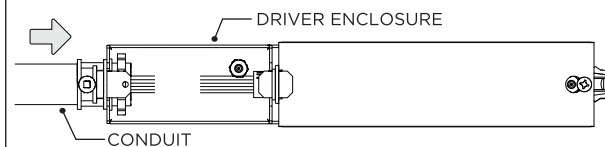


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

4




SECURE LID ONTO DRIVER ENCLOSURE AND INSERT INTO CEILING

5

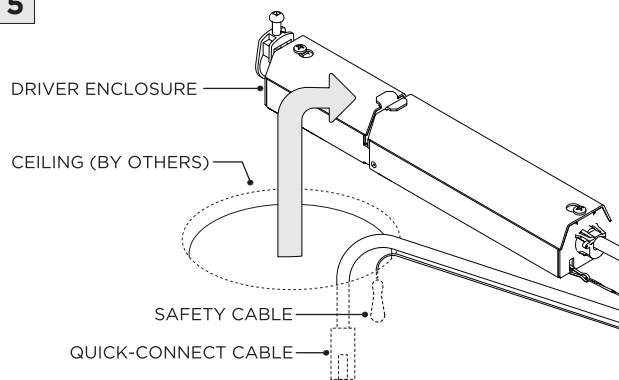


PLACE DRIVER ENCLOSURE ABOVE CEILING

6A

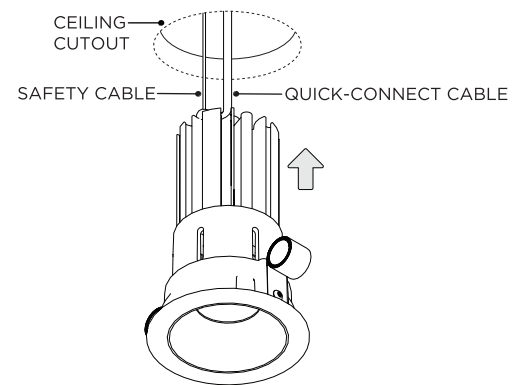


6B









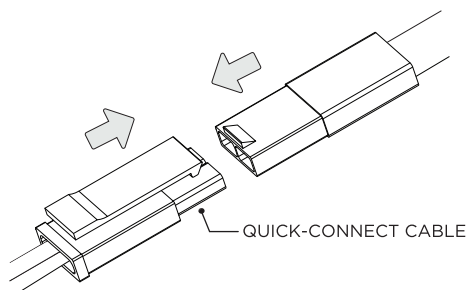


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY










6C

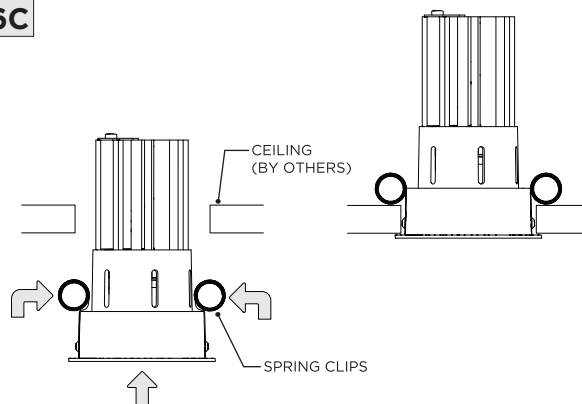


NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

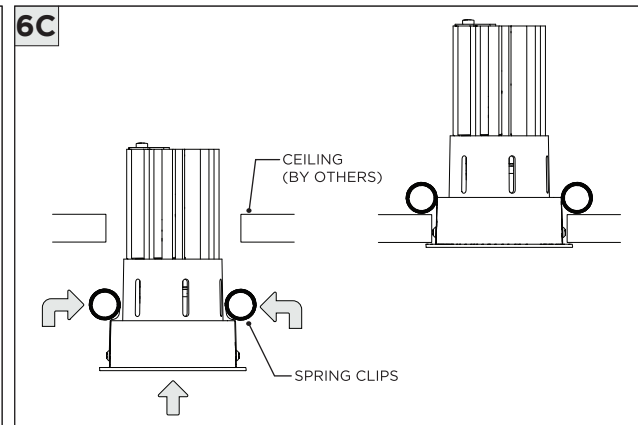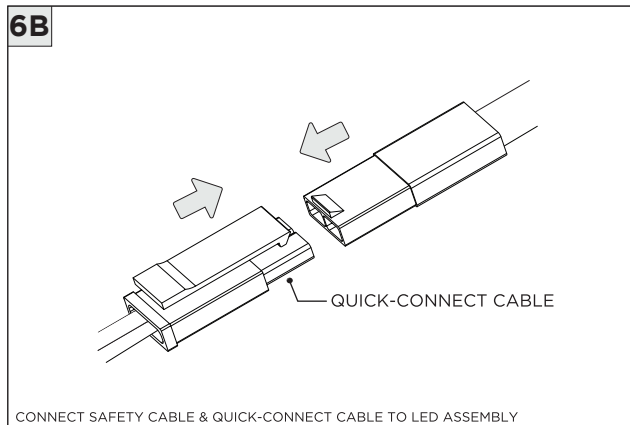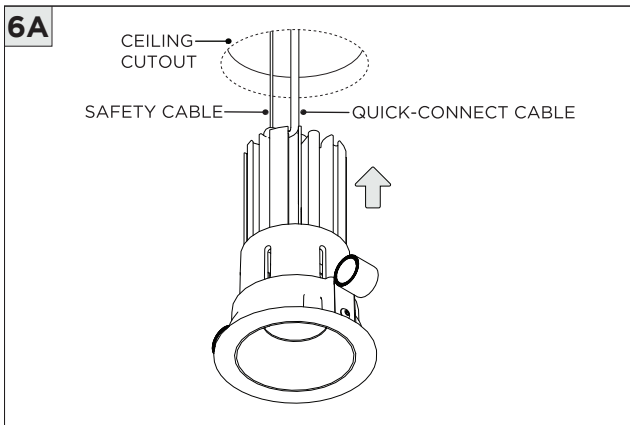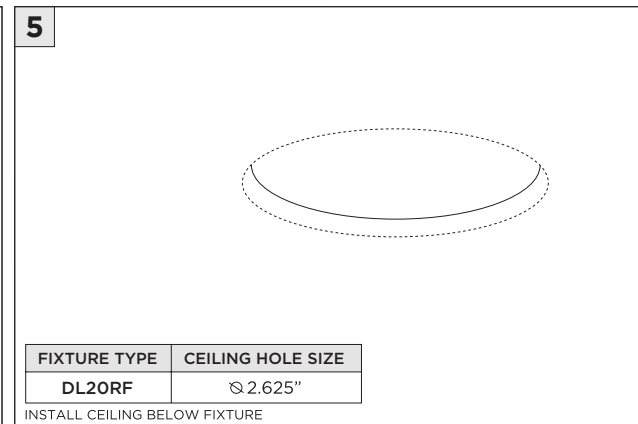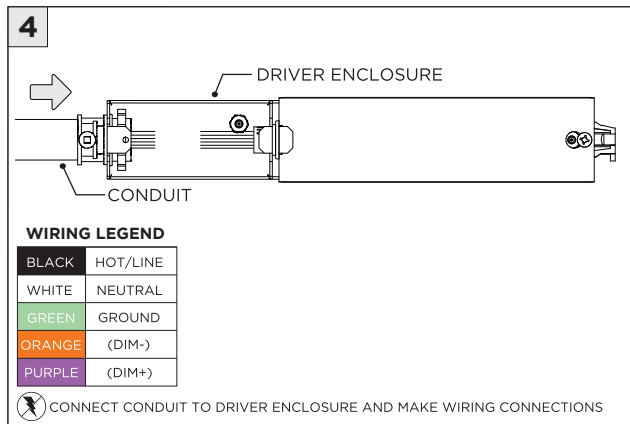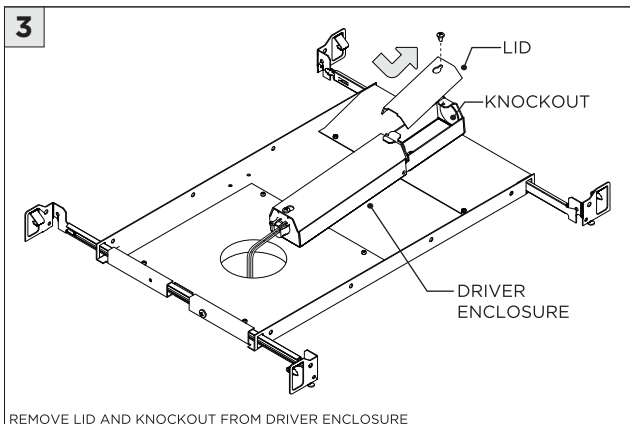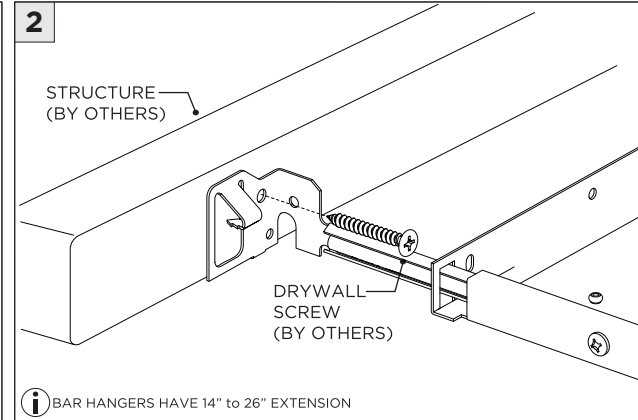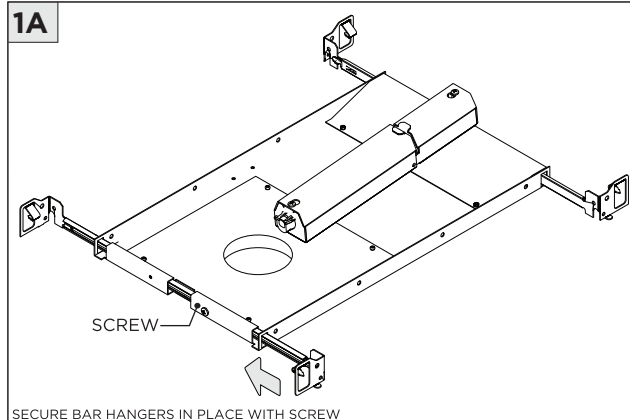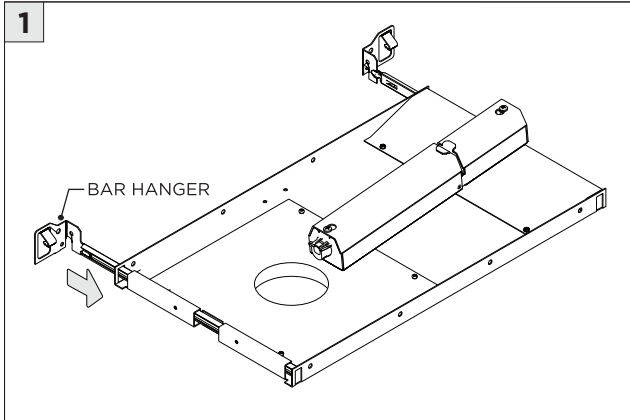


NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)

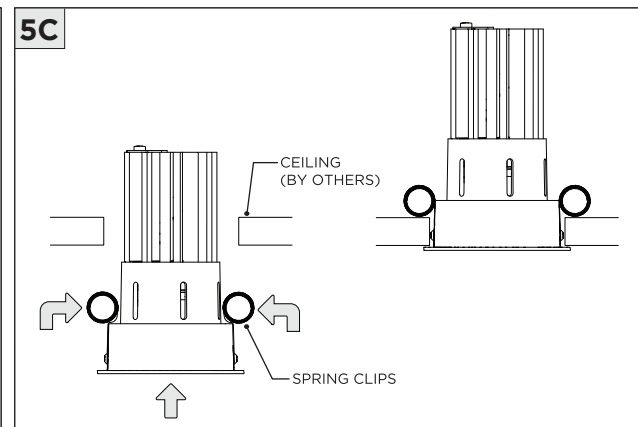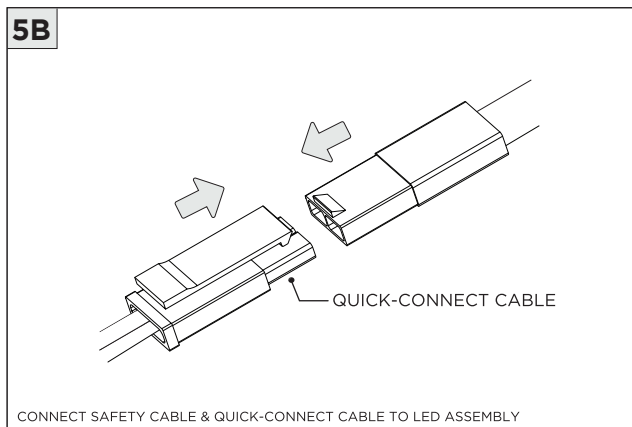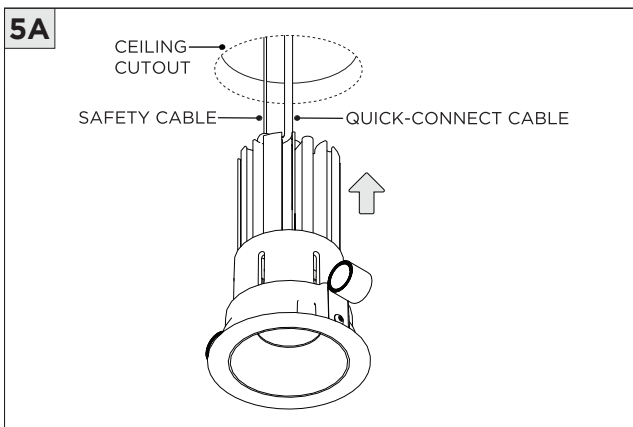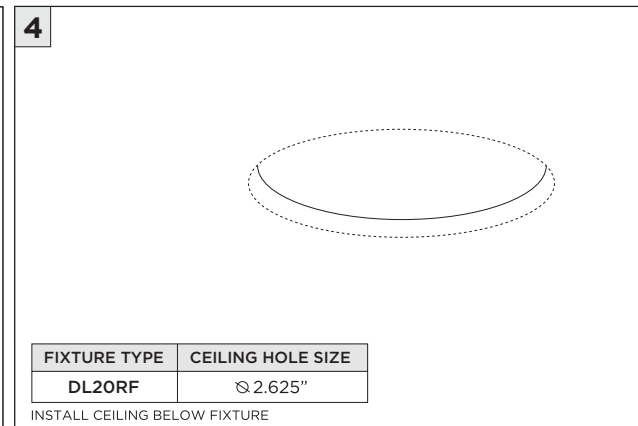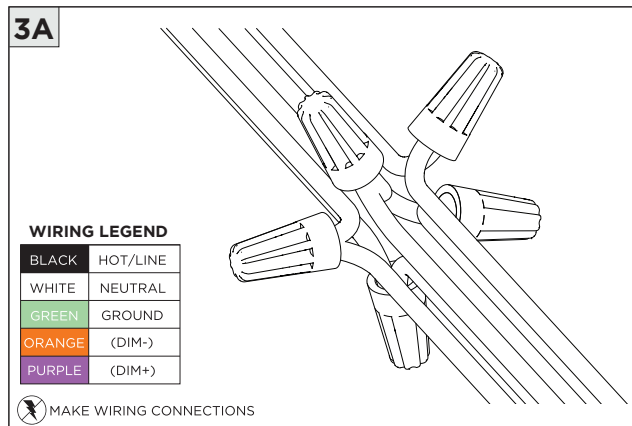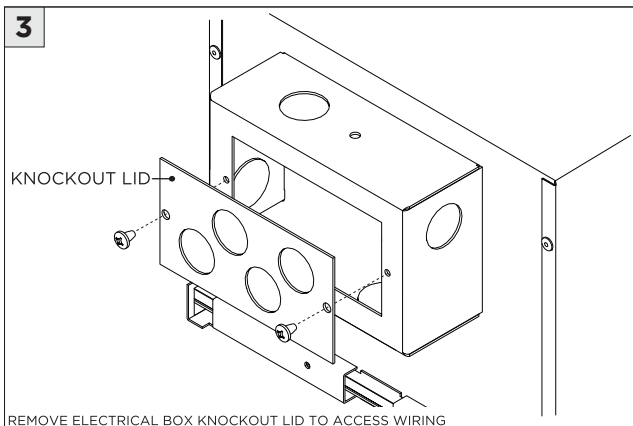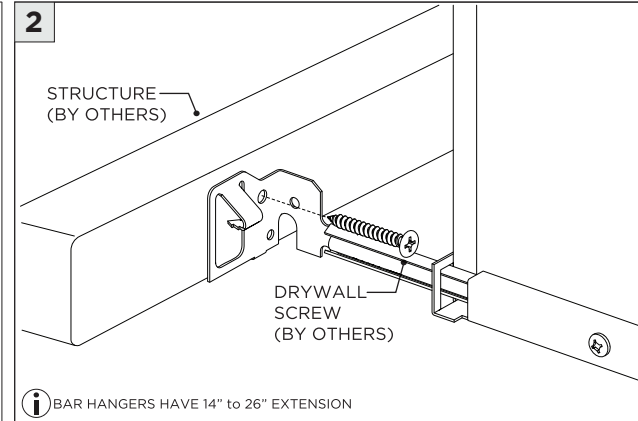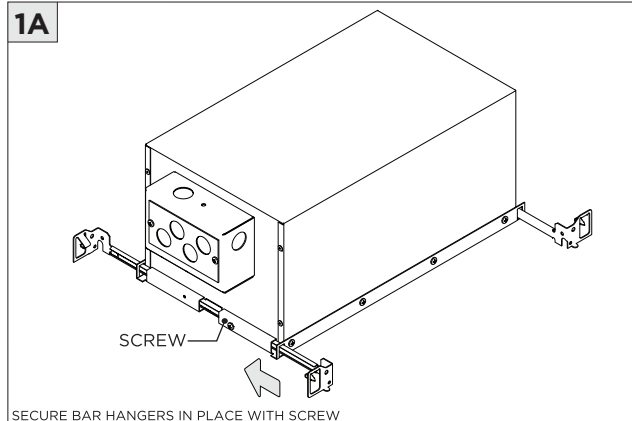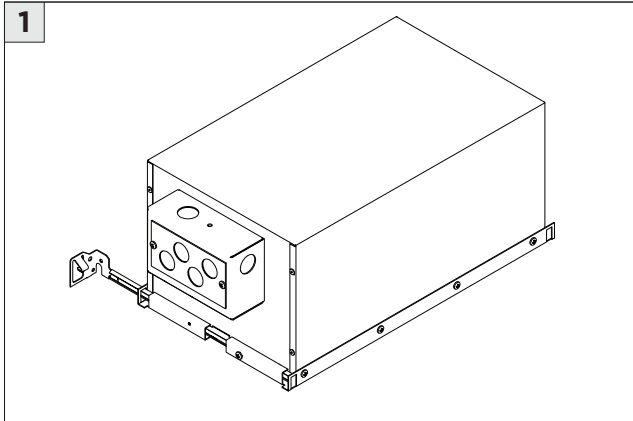



LED SERVICING

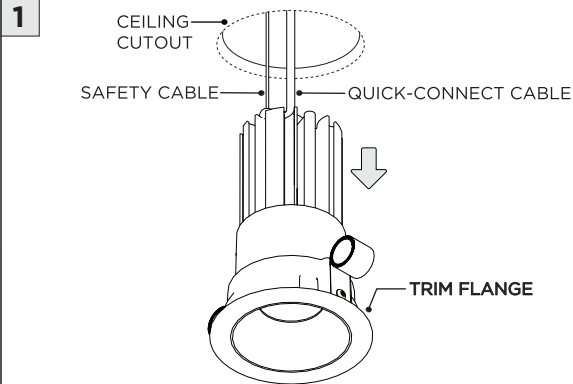

REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

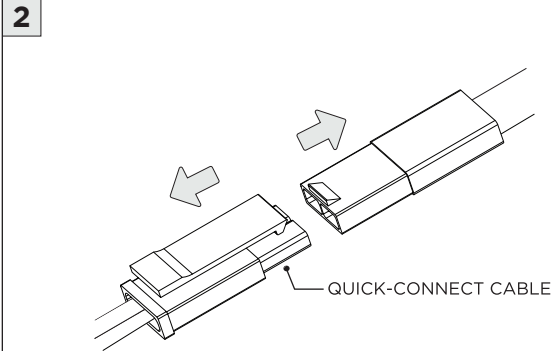


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

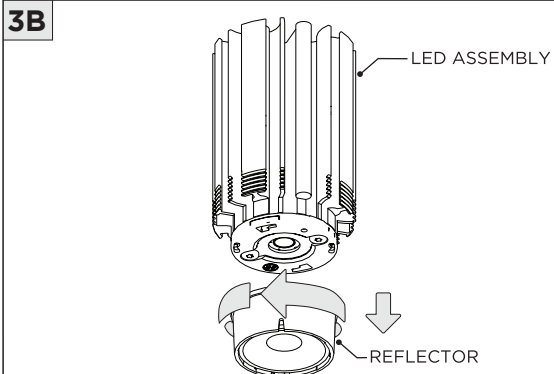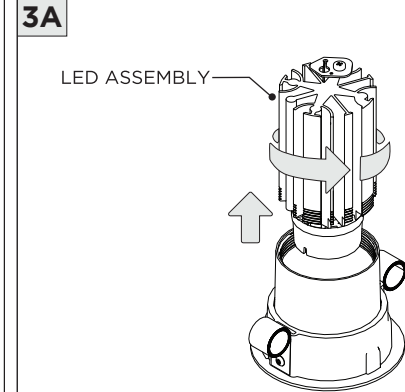

REMOVE REFLECTOR AND REPLACE LED ASSEMBLY


DRIVER SERVICING

1 RMD - REMODEL

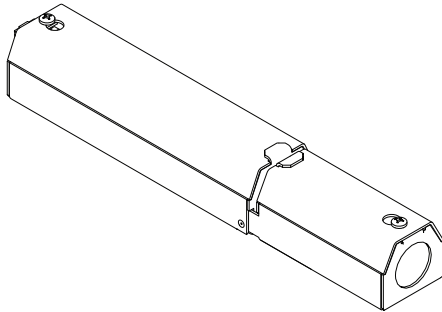


 DISCONNECT POWER BEFORE SERVICING

2

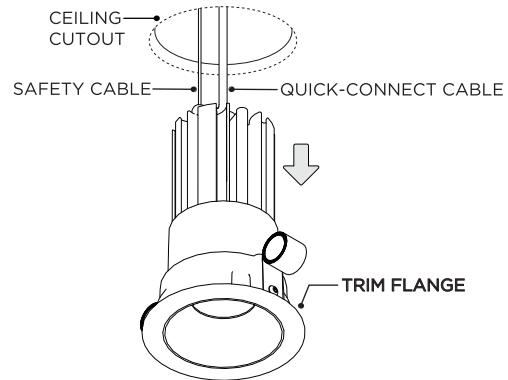


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

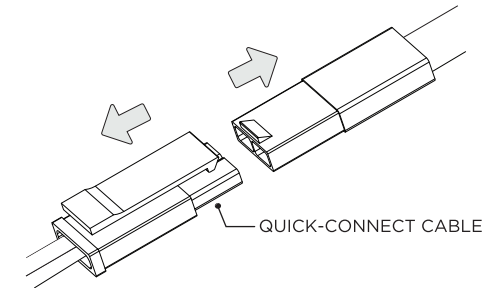


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3




4

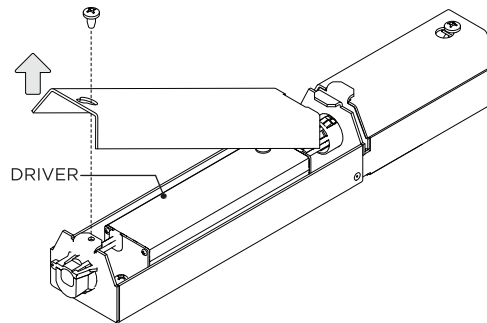


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

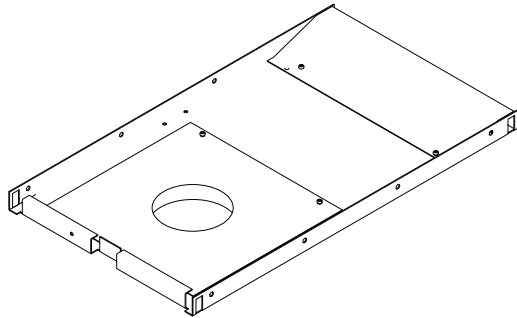


⚡ DISCONNECT POWER BEFORE SERVICING

2

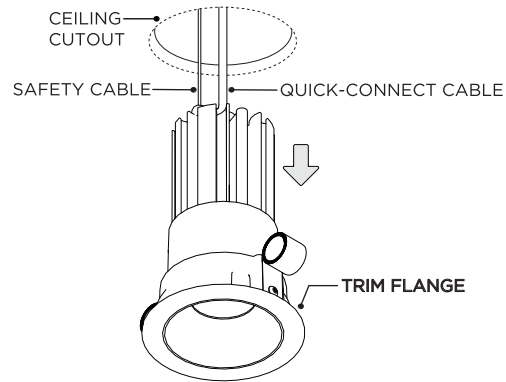


REMOVE BEVELED INSERT FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

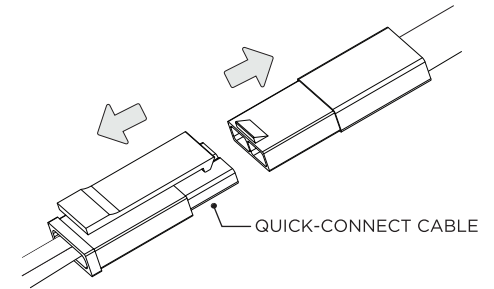


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

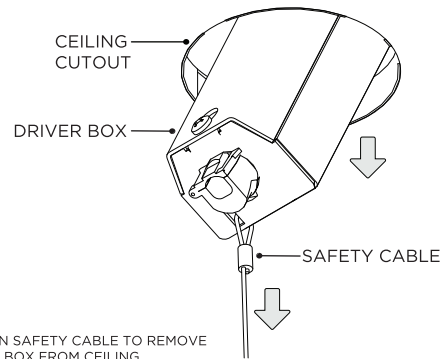


PULL ON SAFETY CABLE TO REMOVE
DRIVER BOX FROM CEILING

4

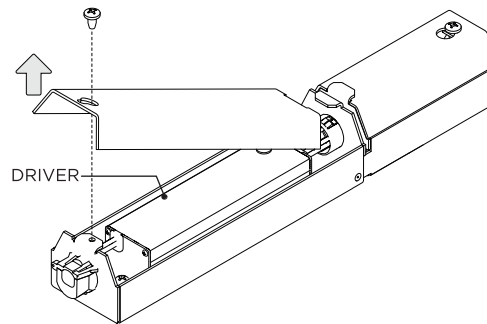


DRIVER SERVICING

1 NC - NEW CONSTRUCTION HOUSING

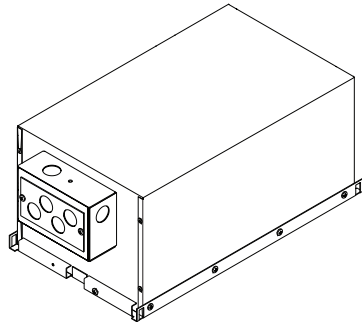


DISCONNECT POWER BEFORE SERVICING

2

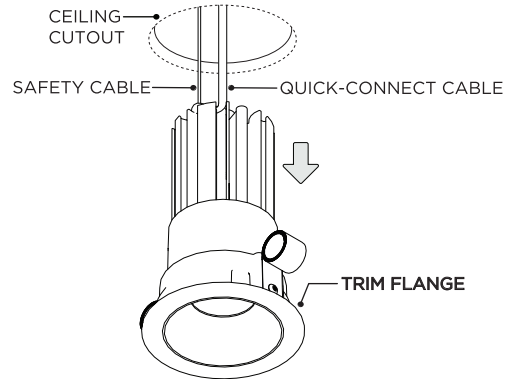


REMOVE BEVELED INSERT FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

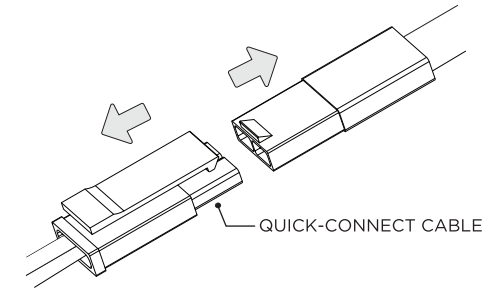


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

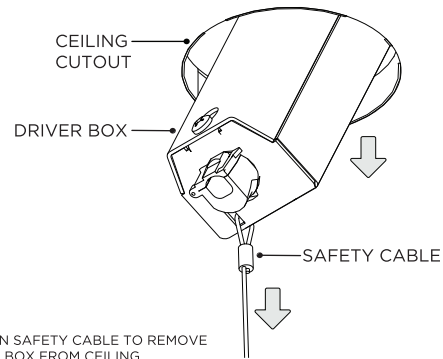

PULL ON SAFETY CABLE TO REMOVE DRIVER BOX FROM CEILING

4

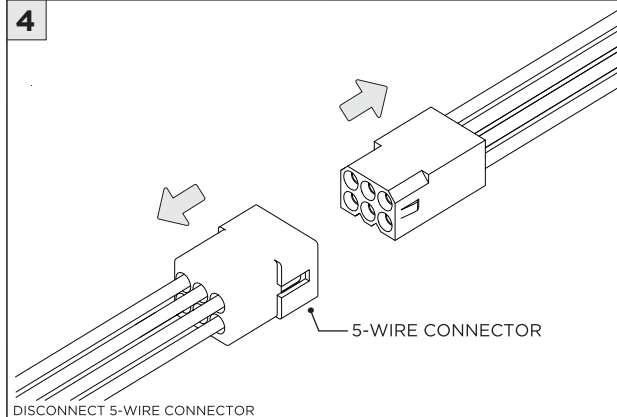

DISCONNECT 5-WIRE CONNECTOR

5

