













2" SQUARE ADJUSTABLE DOWNLIGHT TRIM




ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
RMD - REMODEL  LED INSERT  DRIVER ENCLOSURE  SUCTION CUP	NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)  LED INSERT  NEW CONSTRUCTION FRAME  BAR HANGERS  DRIVER ENCLOSURE  SUCTION CUP
NC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)  LED INSERT  NEW CONSTRUCTION HOUSING  BAR HANGERS  SUCTION CUP	

INSTRUCTION KEY	INFORMATION
⚠	ADDITIONAL
ⓘ	ATTENTION
⚡	POWER ON
🔌	POWER OFF
INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING	


RMD - REMODEL

1

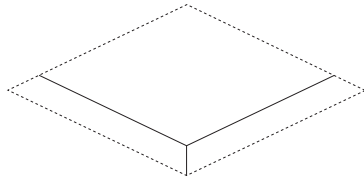


FIXTURE TYPE	CEILING HOLE SIZE
DL20RF	2.625" x 2.625"

2

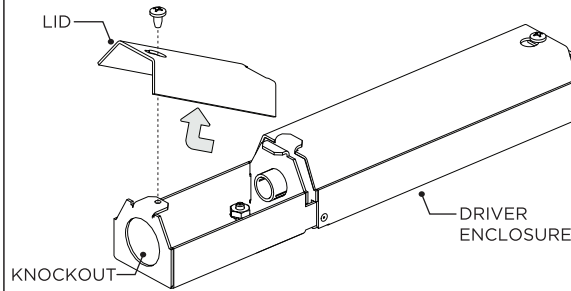

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

3

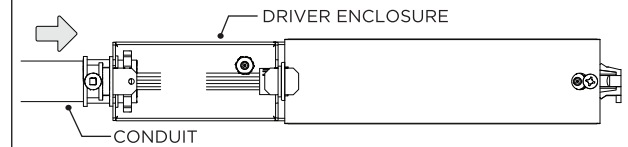


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

4




SECURE LID ONTO DRIVER ENCLOSURE AND INSERT INTO CEILING

5

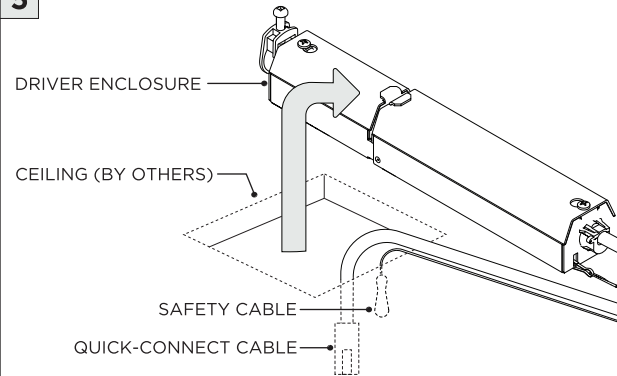


PLACE DRIVER ENCLOSURE ABOVE CEILING

6A

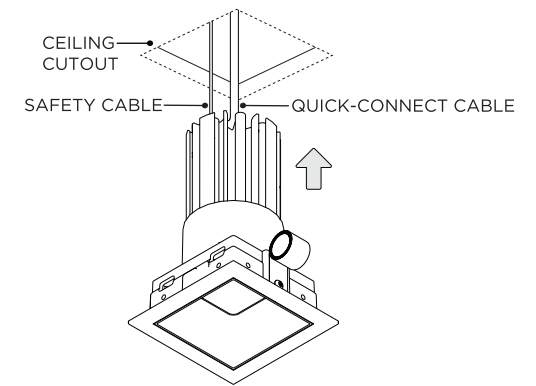


6B









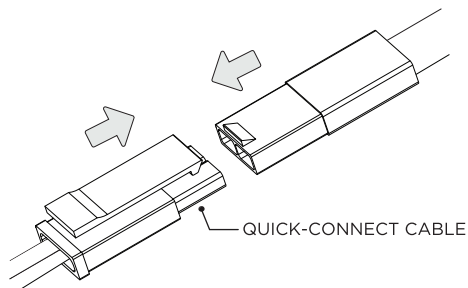


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY










6C

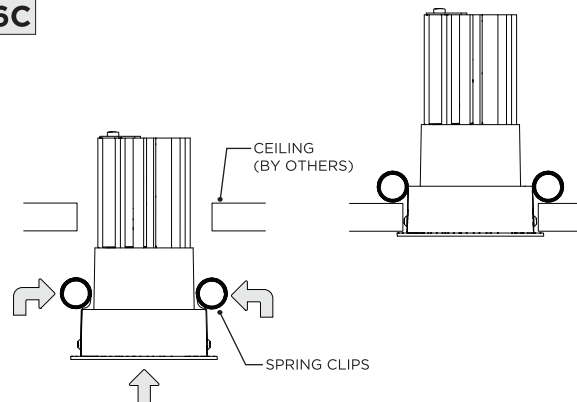

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

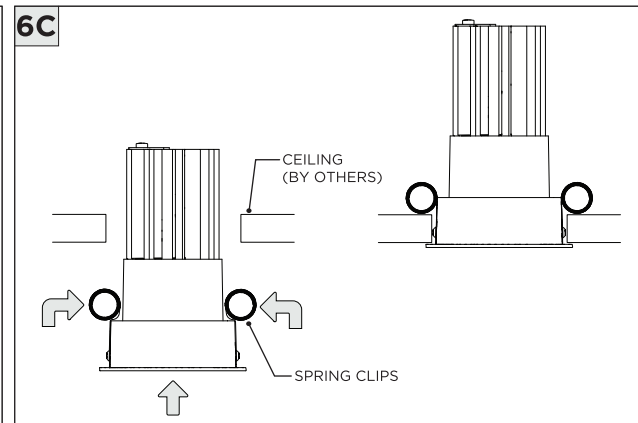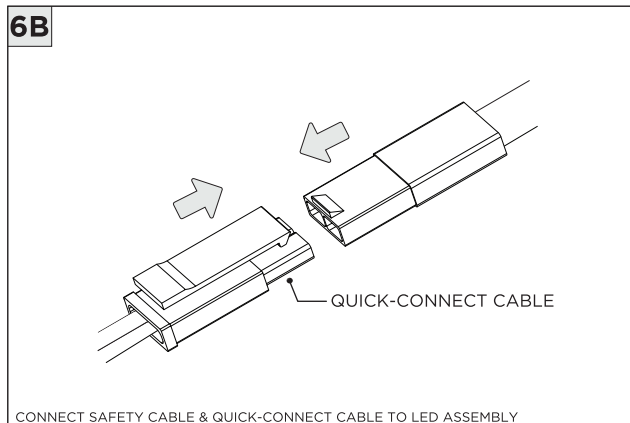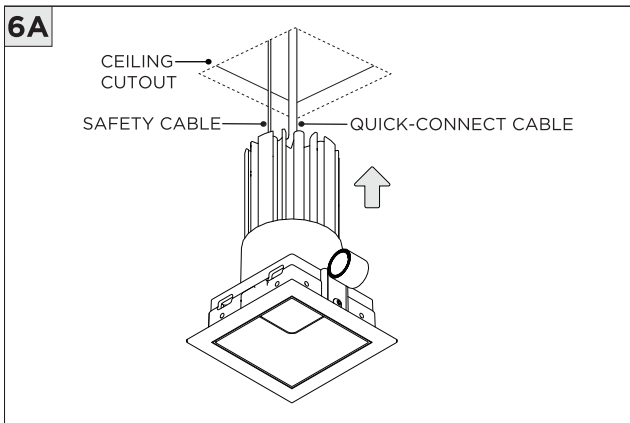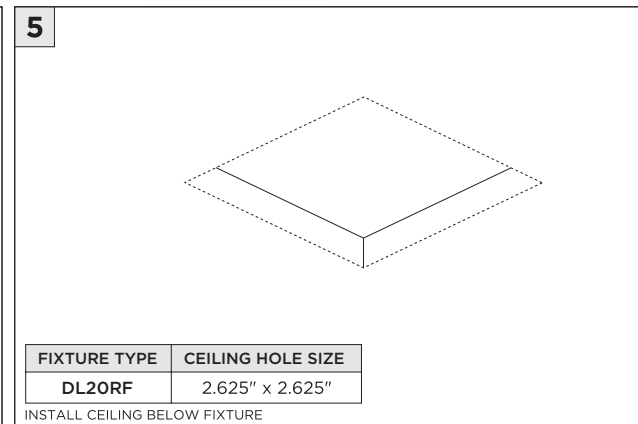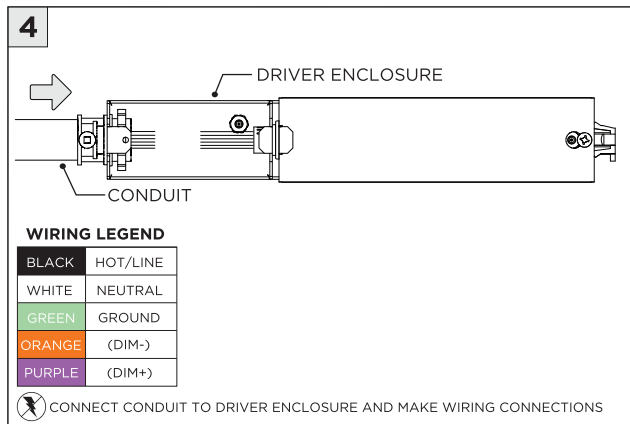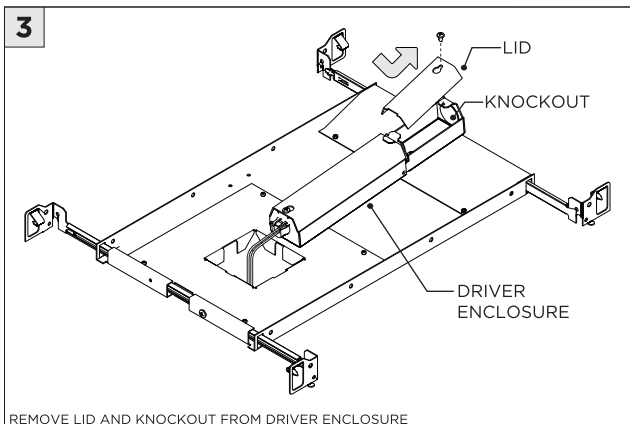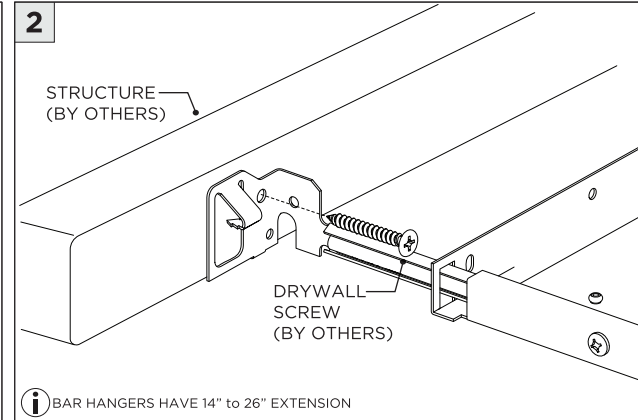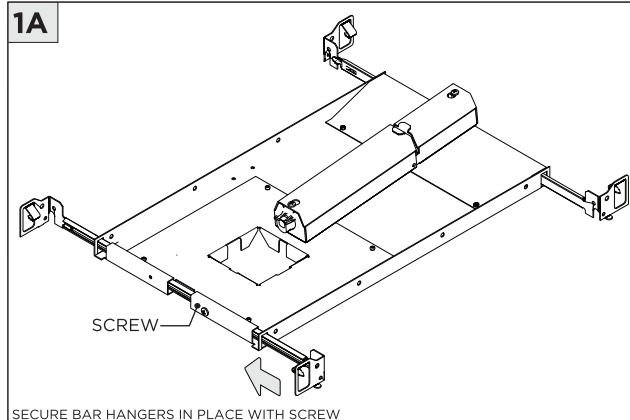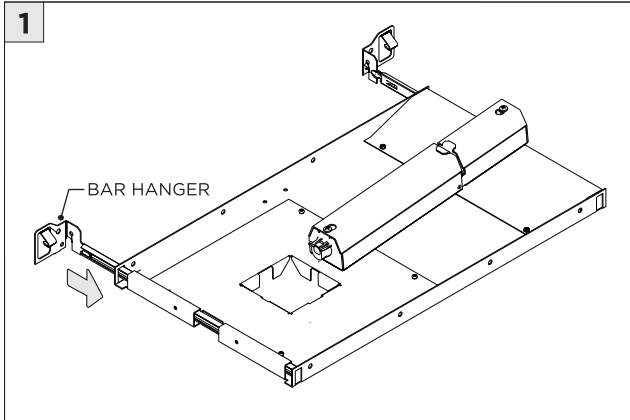


NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)

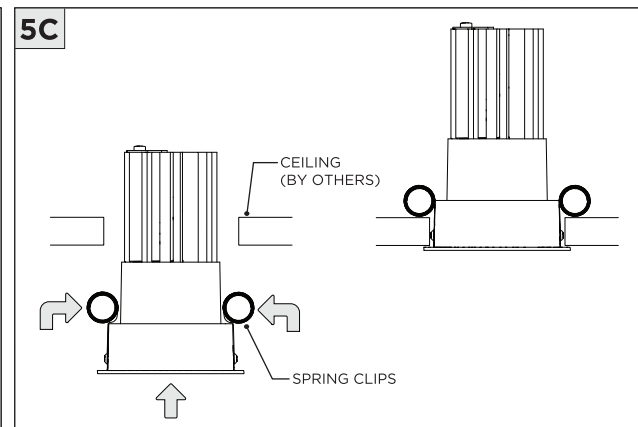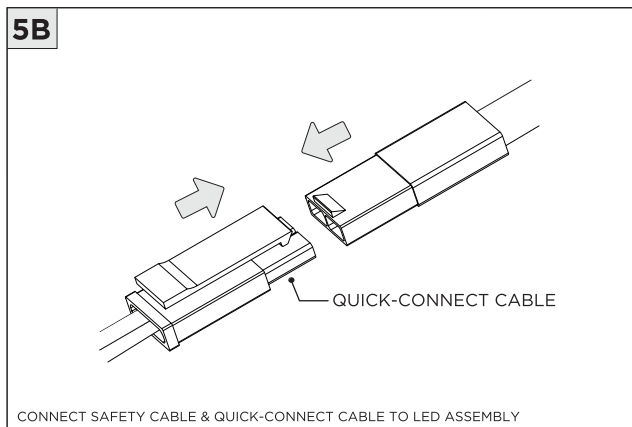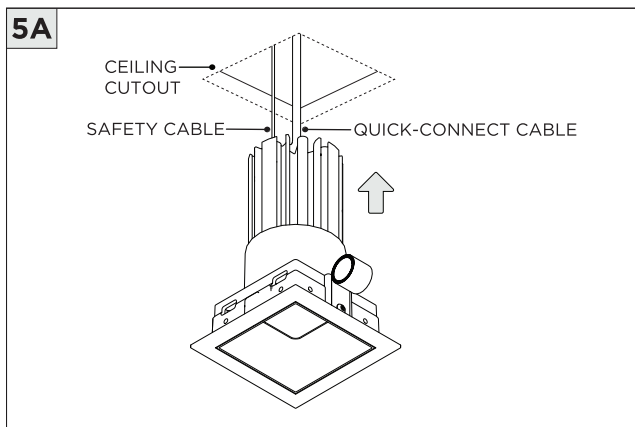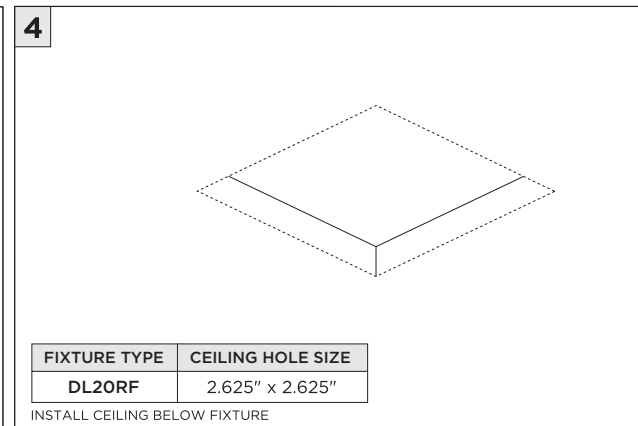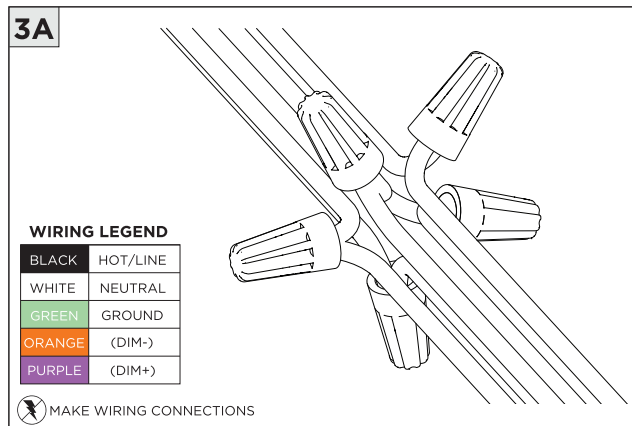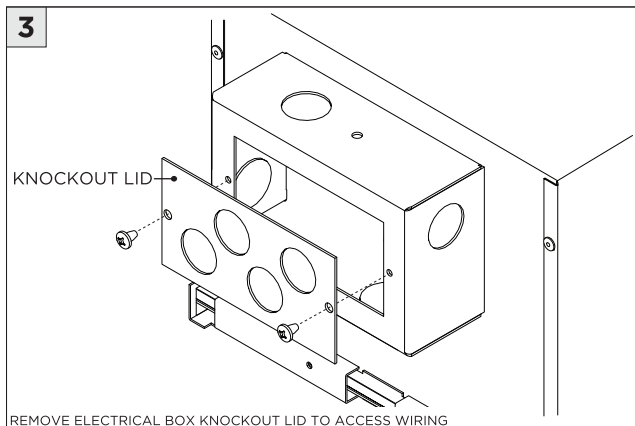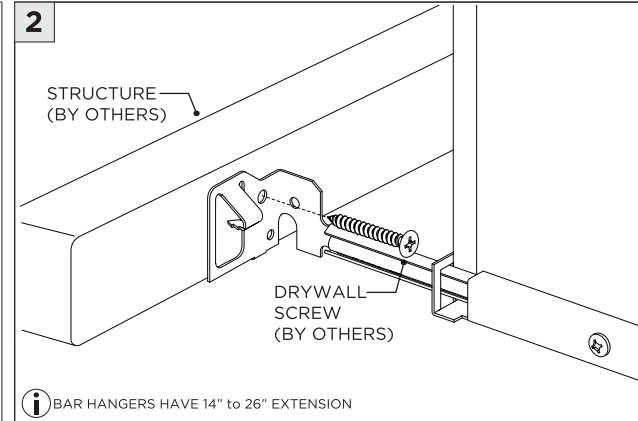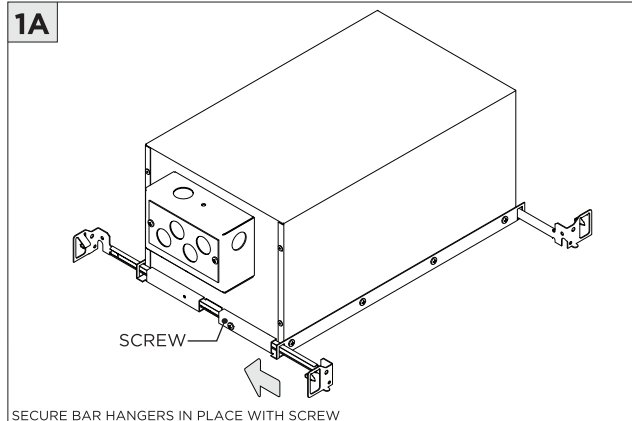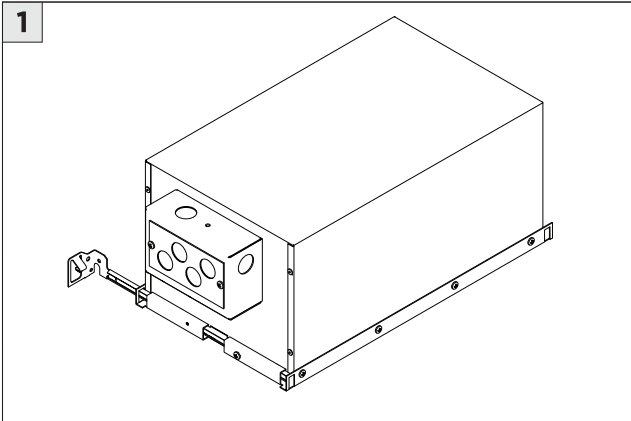


LED ADJUSTMENT

1

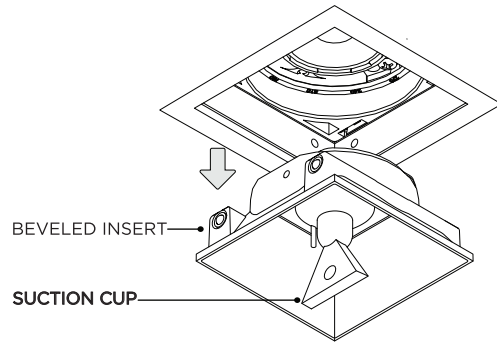


REMOVE BEVELED INSERT FROM CEILING WITH PROVIDED SUCTION CUP

2

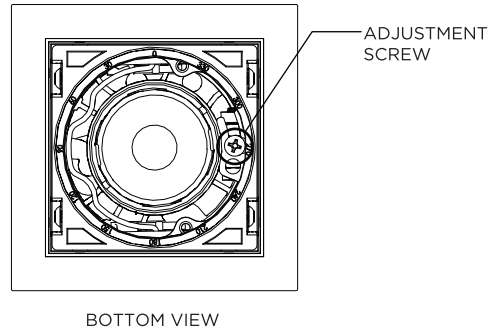


ROTATE SCREW TO ADJUST LED ANGLE

2A

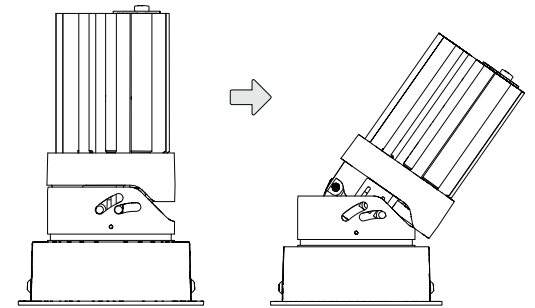


LED SERVICING

1

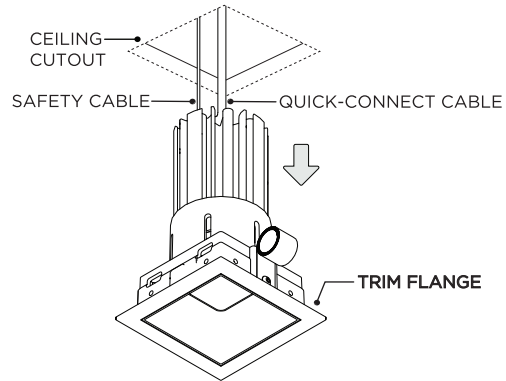


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2

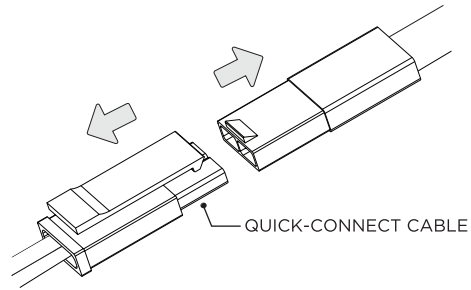


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3A

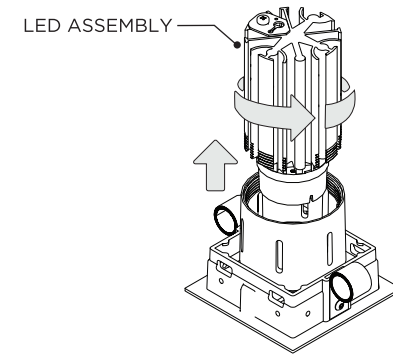


3B

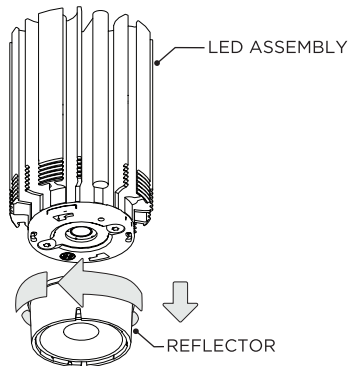

REMOVE REFLECTOR AND REPLACE LED ASSEMBLY


DRIVER SERVICING

1 RMD - REMODEL

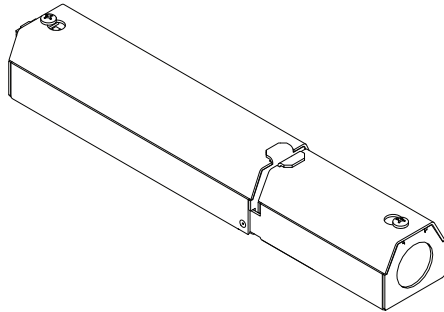


DISCONNECT POWER BEFORE SERVICING

2

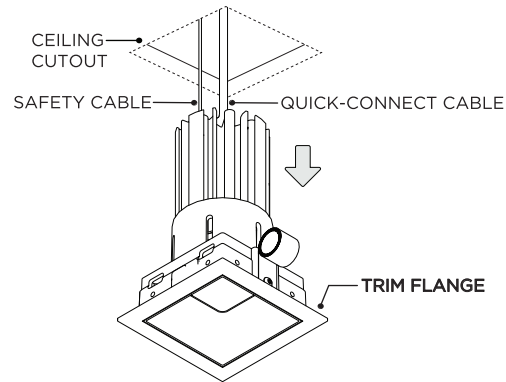


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

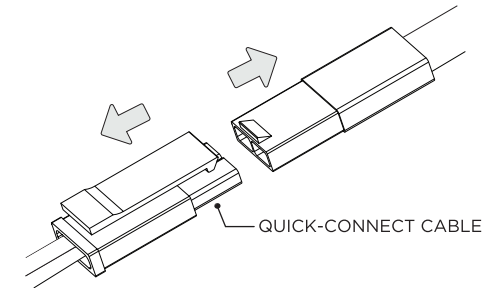


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

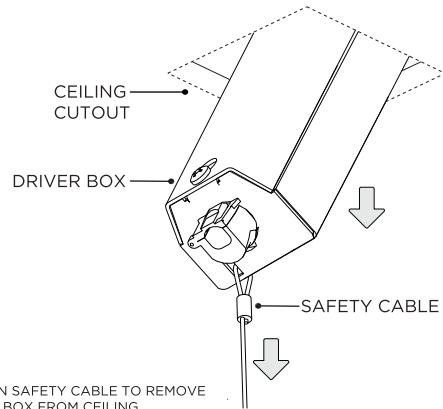


PULL ON SAFETY CABLE TO REMOVE DRIVER BOX FROM CEILING

4

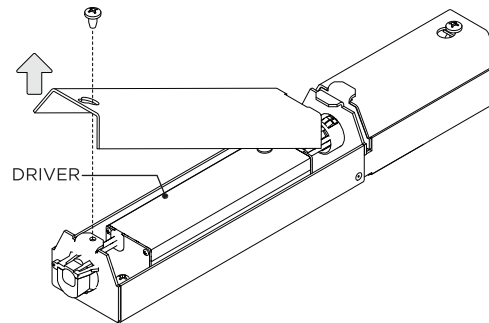


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

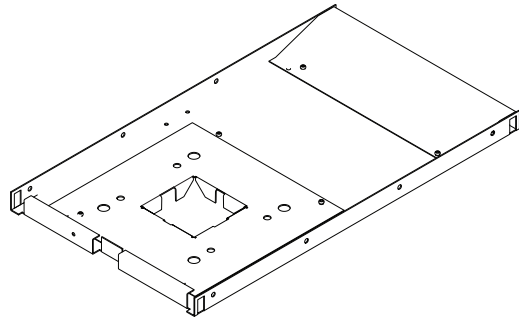


DISCONNECT POWER BEFORE SERVICING

2

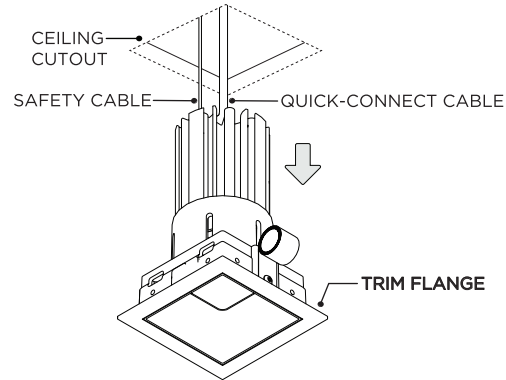


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

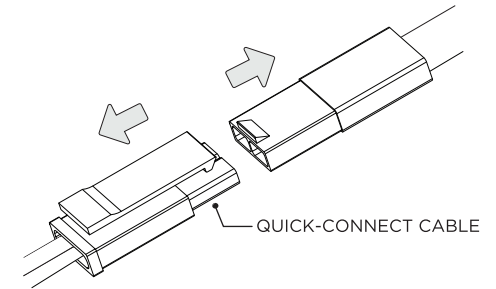


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

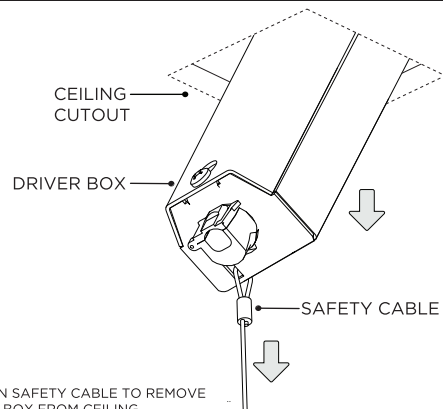


PULL ON SAFETY CABLE TO REMOVE
DRIVER BOX FROM CEILING

4

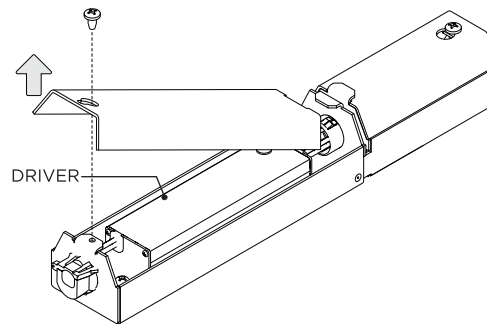


DRIVER SERVICING

1 NC - NEW CONSTRUCTION HOUSING

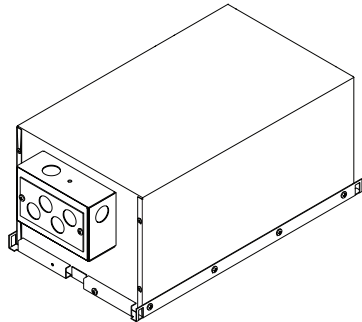


DISCONNECT POWER BEFORE SERVICING

2

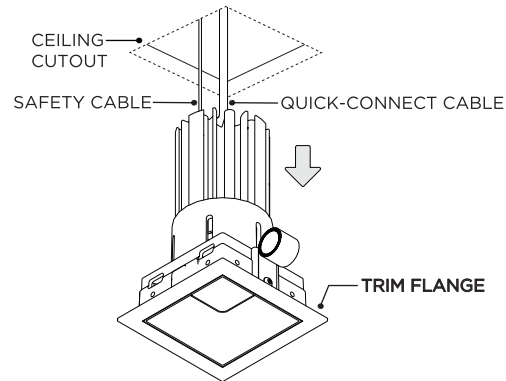


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

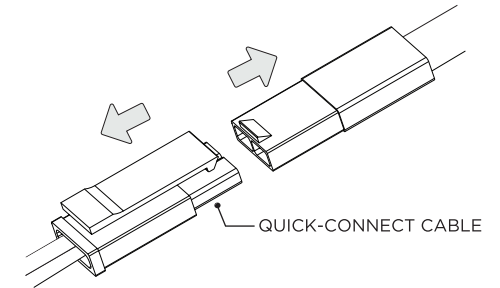


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

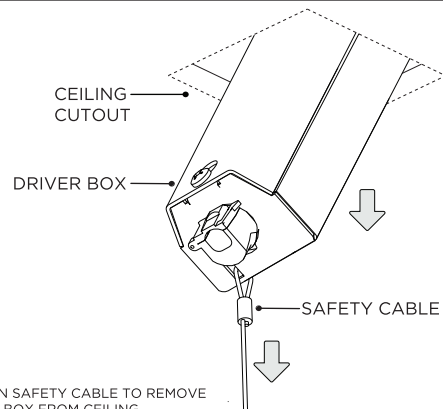

PULL ON SAFETY CABLE TO REMOVE DRIVER BOX FROM CEILING

4A

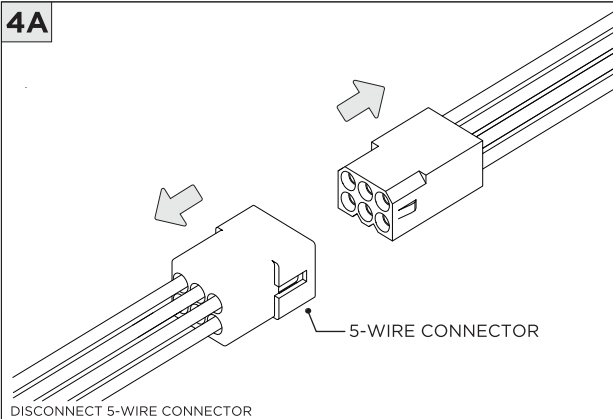

DISCONNECT 5-WIRE CONNECTOR

4B

