






3G-58RMSL, 3G-48RMSL
5.8" 4.8" CURVED RECESSED SLOT
FLANGELESS/TRIM FLANGE



⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY



ℹ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES		INCLUDED COMPONENTS		
58RMSL PROFILE	48RMSL PROFILE			
		STARTER	JOINER	ENDER

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
ℹ ATTENTION	
⚡ POWER ON	
ⓧ POWER OFF	

OVERVIEW



FLANGELESS - FX

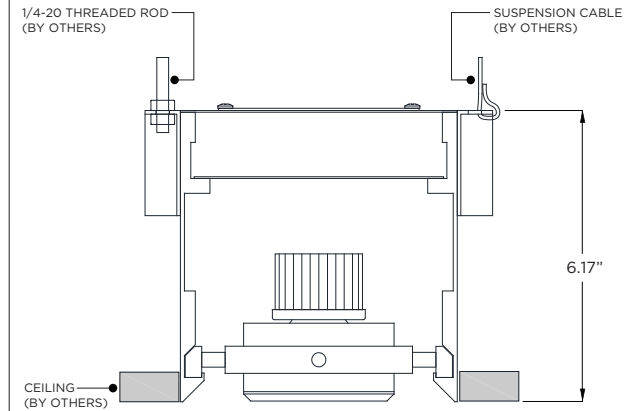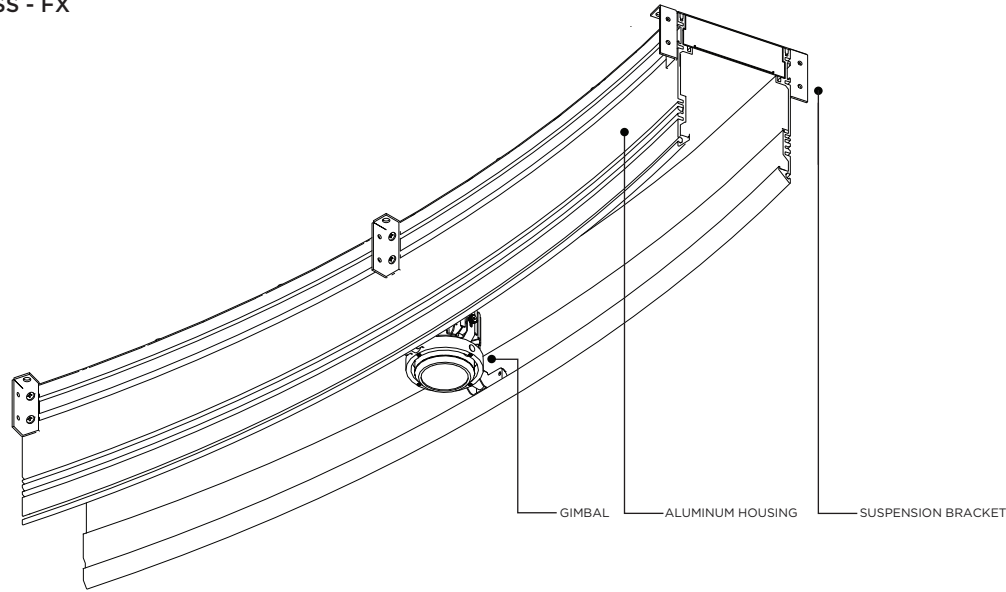

FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-48RMSL	4.95"	LENGTH + 0.05"
3G-58RMSL	5.95"	LENGTH + 0.05"


WHITE TRIM FLANGE - WT

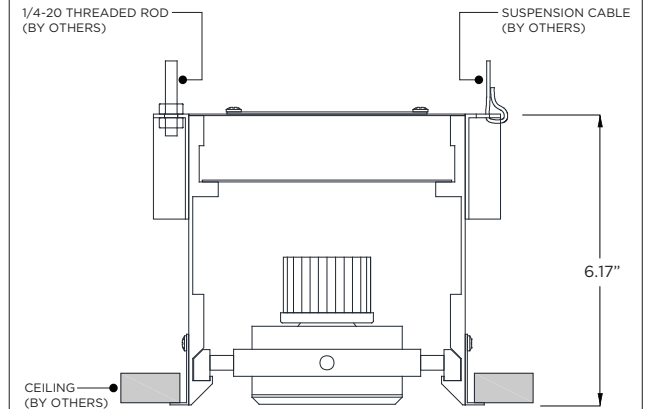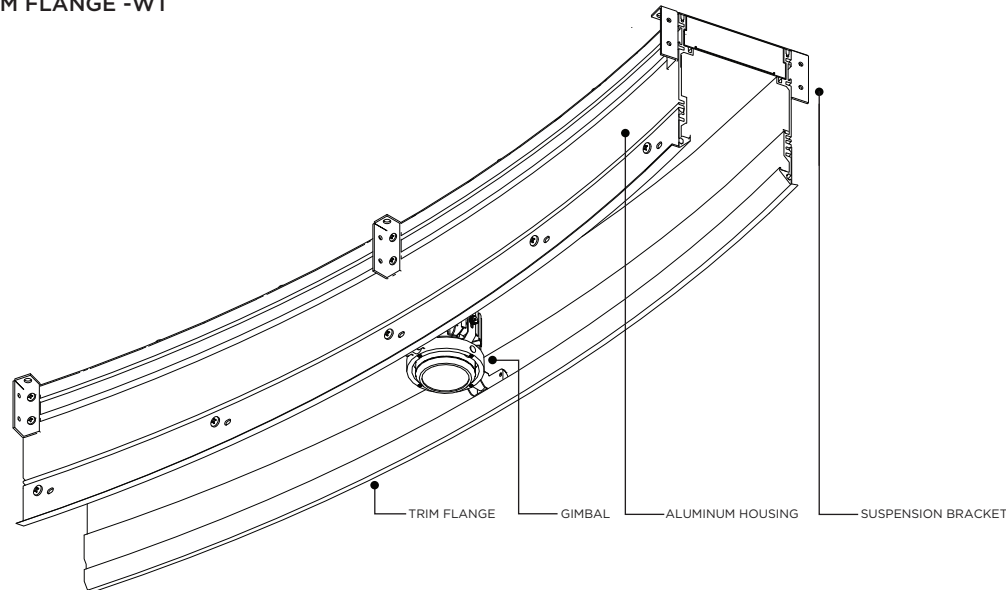


TRIM FLANGE - WT - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-48RMSL	4.85"	LENGTH + 0.40"
3G-58RMSL	6.30"	LENGTH + 0.40"

THREADED ROD LOCATION

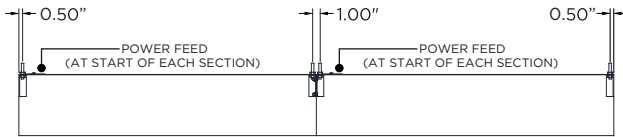

IDENTIFICATION AND PREPARATION









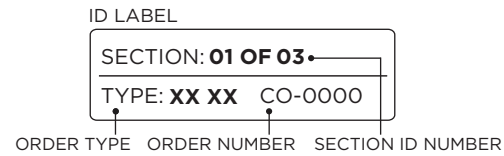


i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS

ID LABEL


SECTION: **01 OF 03**
TYPE: **XX XX** CO-0000



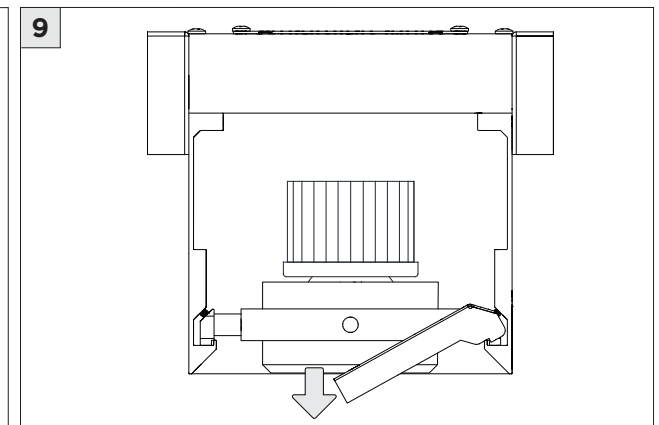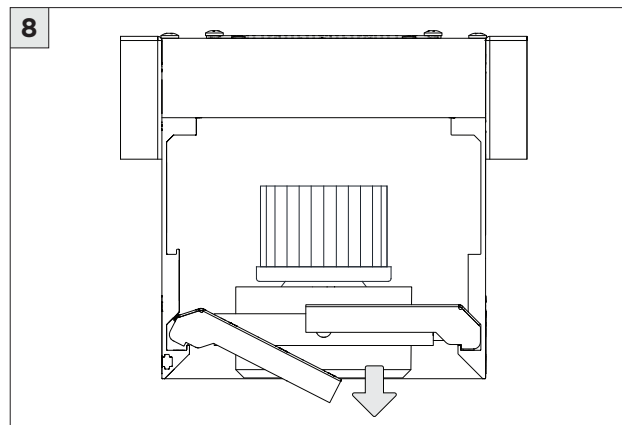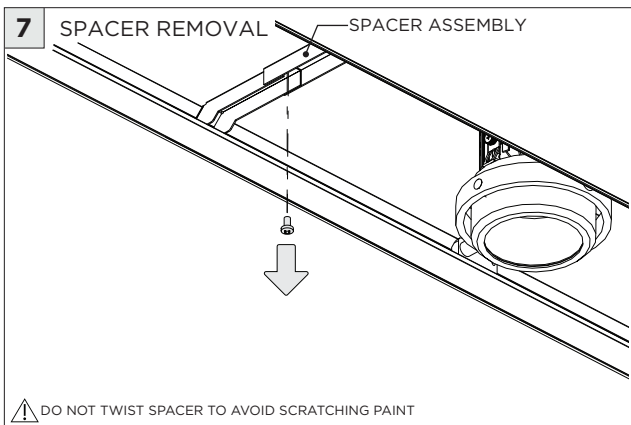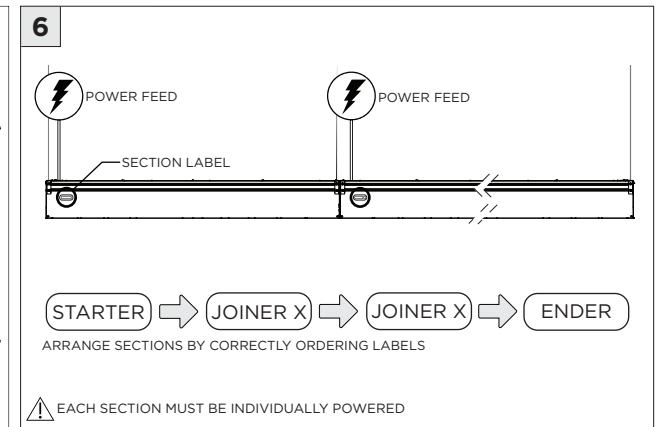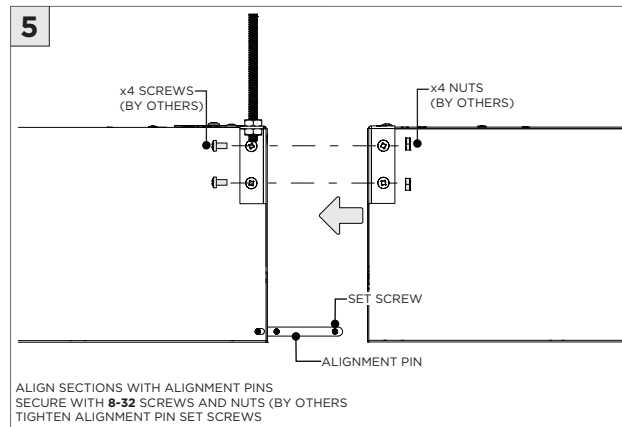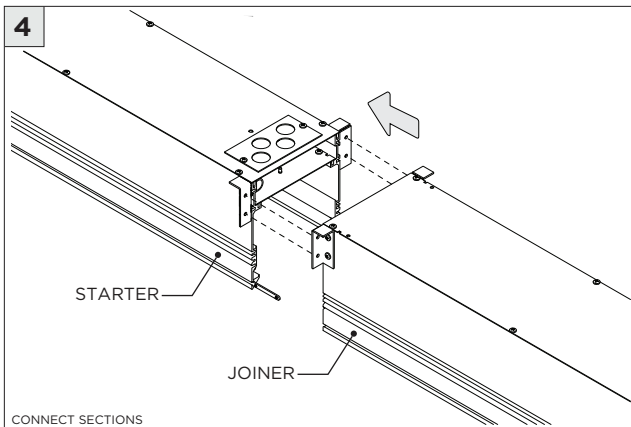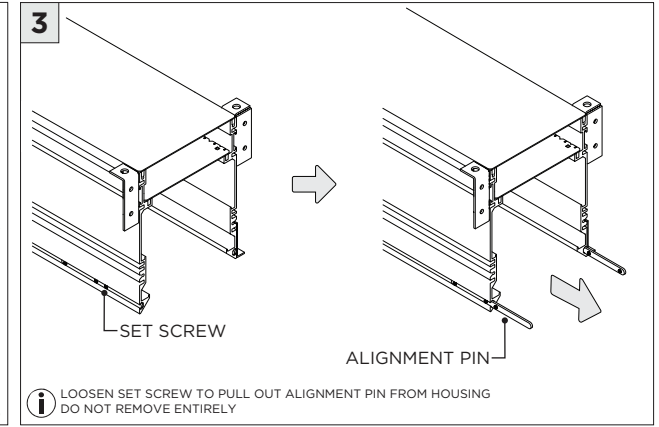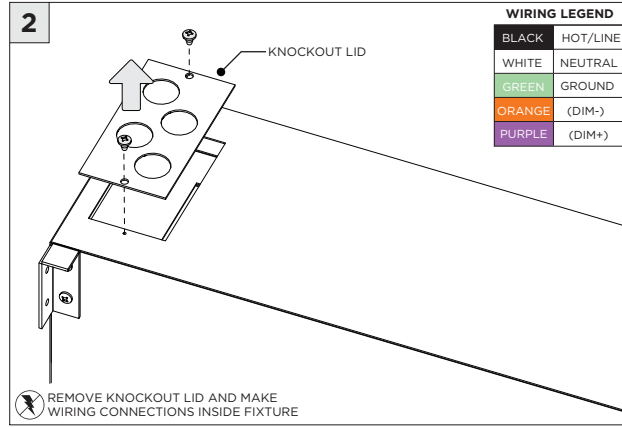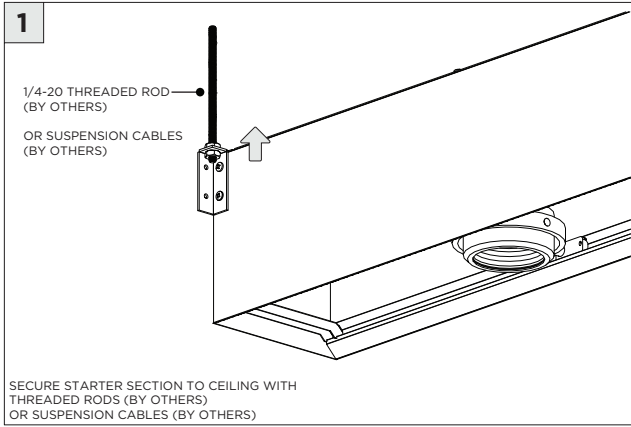


LED SERVICING - 48/58RMSL

1

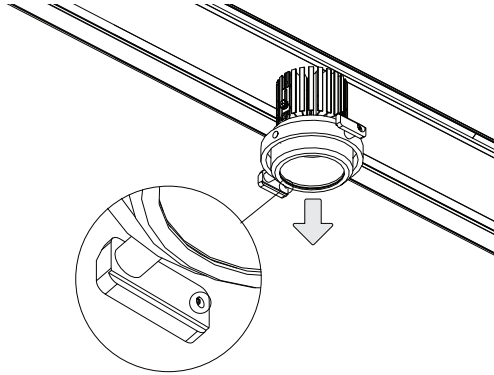


2

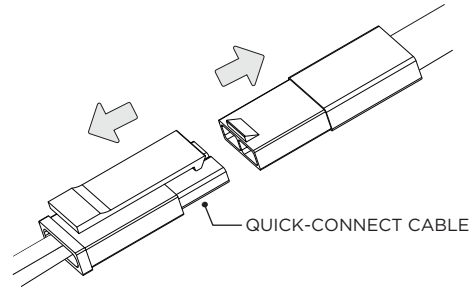


QUICK-CONNECT CABLE

DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3



4

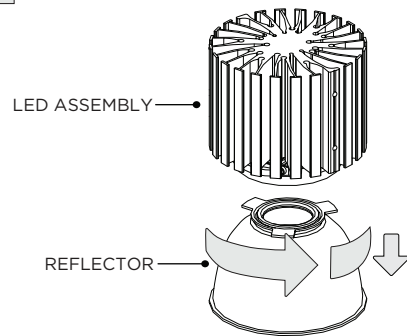

LED ASSEMBLY

REFLECTOR

TWIST REFLECTOR TO REMOVE FROM LED ASSEMBLY

DRIVER SERVICING - 48/58RMSL

