



# 3G-SRU24

24" RUBO  
SURFACE MOUNTED



Featuring a white sandblasted acrylic diffuser  
 Proprietary LED source fully saturates the hand fabricated acrylic  
 Evenly illuminated sides with distinctive lines  
 Standard and high lumen output options  
 Suitable for ceiling or wall applications  
 1% dimming standard with several integral driver options

## ORDERING INFORMATION

<b>PROJECT:</b>	<input type="text"/>	<b>TYPE:</b>	<input type="text"/>
<b>CATALOG #:</b>	<input type="text"/>	<b>DATE:</b>	<input type="text"/>

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	OPTIONS
<b>3G-SRU24</b>	<b>L2</b> - STANDARD OUTPUT	<b>27K</b> - 2700K	<b>UNV</b> - 120V-277V	<b>DIM</b> - 0-10V (STANDARD 100-1%)	<b>WH</b> - WHITE (STANDARD) <b>SV</b> - SILVER	<b>EM</b> - INTEGRAL EMERGENCY BATTERY
	<b>L4</b> - HIGH OUTPUT	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>120</b> - 120V <b>347</b> - 347V (0-10V ONLY)	<b>DHL2</b> - LUTRON (ECO SYSTEM "H" 100-1%) <b>DALI</b> - DALI (100-1%) <b>D01</b> - 0-10V (100-0.1%) <b>DMX</b> - DMX (100-0%)		
	CONSULT 3G FOR CUSTOM OUTPUTS					

## PERFORMANCE CHART (Based on 3500K)

LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY (LM/W)
<b>L2</b> - STANDARD OUTPUT	29W	2915	101
<b>L4</b> - HIGH OUTPUT	46W	4702	102

EDITION 01/19





**3G-SRU24**

LIGHTING 24" RUBO - SURFACE MOUNTED

## TECHNICAL

### HOUSING

- White, fabricated sandblasted acrylic diffuser with distinctive lines
- Fixture collar made from spun aluminum with powder coated finish
- Reflector fabricated in steel with high reflectance white powder coated finish
- Twist and lock construction with no visible hardware
- Standard polyester powder coated matte white finish. Optional matte silver finish

### ELECTRICAL

- Standard 0-10V, 100-1% dimming and 0.9 power factor
- Lutron EcoSystem and eldoLED Dali options available with 100-1% dimming
- All drivers are integral and easily accessible within fixture collar
- Integral Emergency Battery: 90 minutes

### LED SYSTEM

- Proprietary LED system
- Color consistency < 3 SDCM
- Standard (80+CRI)
- Available in 27K, 30K, 35K, and 40K
- Average rated life of > 50,000 hours
- 5-year warranty

### MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Twist and lock mounting system with no visible hardware

### LISTING

- ETL listed and tested to UL standards. Suitable for dry or damp locations

### WARRANTY



- 5 Year warranty on LED and drivers
- Manufacturer 1-year warranty for defects in material and workmanship under normal use
- Ambient temperature at fixture should not exceed 25°C

# 3G

## 3G-SRU24

LIGHTING 24" RUBO - SURFACE MOUNTED

### DRAWINGS AND DIMENSIONS

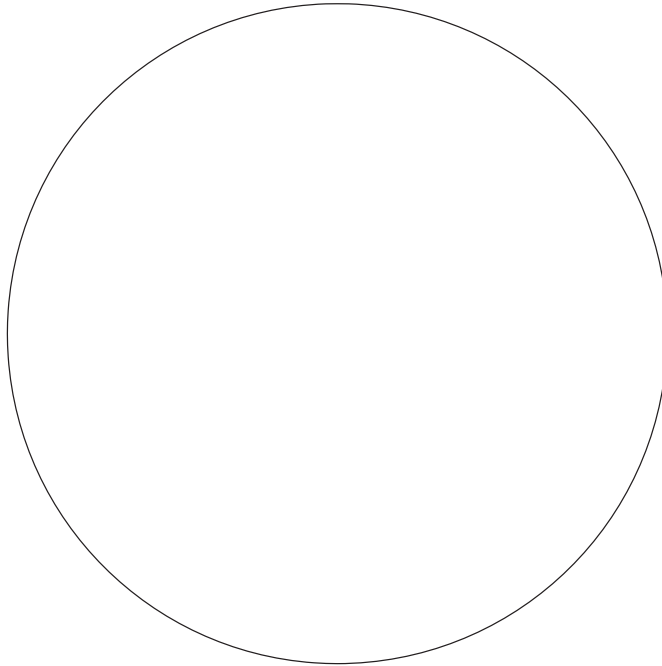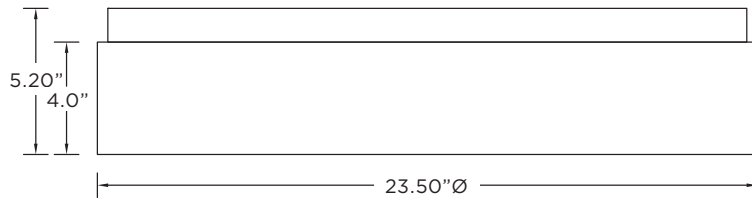

### MOUNTING

