



3G-RC1-5RD

5" ROUND MADISON
TRIM & TRIMLESS



New construction, shallow housing, and IC housing options available
 Machined aluminum insert with seamless ceiling integration
 Trim fixture designed to conceal internal hardware
 Machined aluminum double gimbal. Adjustable and lockable
 Regressed LED source for enhanced glare control
 Lumen range of 1000lm to 5000lm (80+, 90+, and 97+ CRI options)
 1% dimming standard with several integral driver options

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE	DRIVER
3G-RC1-5RD	10 - 1000 LUMENS	S80 - 80+CRI (STANDARD)	27K - 2700K	20D - 20°	120 - 120V ³	DIM - 0-10V (STANDARD 100-1%) DHL2 - LUTRON (ECO SYSTEM "H" 100-1%) DALI - DALI (100-1%) LE - PHASE DIMMING ³ (TRIAC/ELV, 100-1%, 120V ONLY) D01 - 0-10V (100-0.1%) DMX - DMX (100-0%)
	15 - 1500 LUMENS		30K - 3000K	40D - 40°		
	22 - 2200 LUMENS	H90 - 90+ CRI ¹ H97 - 97+ CRI ²	35K - 3500K	60D - 60°	347 - 347V (0-10V ONLY)	
	30 - 3000 LUMENS		40K - 4000K			
	40 - 4000 LUMENS					
50 - 5000 LUMENS						

FLANGE TYPE	GIMBAL FINISH	HOUSING INTERIOR	HOUSING TYPE	OPTIONS
WT - WHITE (STANDARD) ST - SILVER BT - BLACK CT - CUSTOM XTR - TRIMLESS	NG - NATURAL ALUMINUM (STANDARD) BG - BLACK WG - WHITE	BK - BLACK (STANDARD)	NC - NEW CONSTRUCTION (NON-IC) IC - IC HOUSING ⁴ CP - CHICAGO PLENUM SH - SHALLOW HOUSING ⁵ (IC RATED - BLACK ONLY) ATSH - SHALLOW HOUSING ⁵ (AIRTIGHT - BLACK ONLY)	BH - BAR HANGERS SF70 - SOFTENING LENS LS70 - LINEAR SPREAD HXB70 - BLACK HEXCELL LOUVER EM - EMERGENCY BATTERY ⁶ <small>Maximum 3 optical accessories See optical accessories page for more options</small>

¹ 90+ CRI available up to 4000lm
² 97+ CRI available up to 3000lm
³ Forward phase/Reverse phase driver available up to 2200lm and only in 120V
⁴ IC Housing available up to 2200lm
⁵ IC Rated Shallow Housing and Airtight Shallow Housing available up to 2200lm. Black interior only
⁶ Emergency battery installed remotely by others. Not accessible through the inside of the fixture

PERFORMANCE CHART (Per fixture head)

80+ CRI (Based on 35K and 40° Beam Angle)				90+ CRI (Based on 35K and 40° Beam Angle)				97+ CRI (Based on 35K and 40° Beam Angle)			
LUMEN OUTPUT	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	LUMEN OUTPUT	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	LUMEN OUTPUT	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W
1000 LUMENS	10.0	921	91.8	1000 LUMENS	10.0	788	78.6	1000 LUMENS	10.0	692	69.0
1500 LUMENS	14.0	1289	91.8	1500 LUMENS	16.0	1261	78.6	1500 LUMENS	16.0	1107	69.0
2200 LUMENS	20.7	1896	91.8	2200 LUMENS	24.8	1948	78.6	2200 LUMENS	24.8	1710	69.0
3000 LUMENS	32.9	2578	78.3	3000 LUMENS	32.9	2252	68.4	3000 LUMENS	32.9	2035	61.8
4000 LUMENS	44.6	3345	75.0	4000 LUMENS	44.6	2944	66.0	4000 LUMENS	N/A	N/A	N/A
5000 LUMENS	54.2	3932	72.6	5000 LUMENS	N/A	N/A	N/A	5000 LUMENS	N/A	N/A	N/A

EDITION 01/19



TECHNICAL**HOUSING**

New construction, shallow housing and IC housing options available
Housing fabricated in cold rolled steel. Standard black powder coated finish
Maximum ceiling thickness of 1". Consult factory for modifications
All housing options designed to be easily converted in field to trim or trimless with minimal components
Housings are rated for #12 AWG, (4 in, 4 out), 90°C conductors and through branch wiring

TRIM

Features a 3/4" removable trim assembly designed to conceal inner hardware

TRIMLESS

Mudding flange with integral blocking support
Machined aluminum insert with seamless ceiling integration

ADJUSTABILITY

Solid aluminum double gimbal with dual axis adjustability
Each double gimbal can be locked in place

OPTICS

Regressed LED source for enhanced glare control
Proprietary anodized, aluminum reflectors are field replaceable
Available in 20°, 40°, and 60°

ELECTRICAL

Standard 0-10V, 100-1% dimming and 0.9 power factor
Lutron EcoSystem and eldoLED Dali options available with 100-1% dimming
120V Forward Phase/Reverse Phase driver option with 100-1% dimming
Fixture is pre-wired, thermally protected, and rated for through branch wiring
Electrical enclosures easily accessible through fixture aperture
Emergency Battery: 90 minutes

LED SYSTEM

Citizen LED module (field replaceable)
Color consistency < 2 SDCM
Standard (80+CRI). Optional (90+ and 97+CRI)
Available in 27K, 30K, 35K, and 40K
Average rated life of > 50,000 hours
5-year warranty

MOUNTING

Trim fixture designed for use in drywall, wood, acoustic ceiling tiles, and other architectural ceiling materials
Trimless fixture designed for use in drywall, mud-in ceiling applications
Butterfly brackets compatible with 1/2" x 1/2" channel, 1/2", 5/8", 3/4" bar hanger, 1/2" EMT, and furring strips (supplied by others)

LISTING



ETL listed and tested to UL standards. Suitable for dry and damp locations

WARRANTY





5 Year warranty on LED and drivers
Manufacturer 1-year warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

TRIM HOUSING OPTIONS

- NC** - New Construction (Non-IC)
- IC** - IC Housing (2200lm max)
- CP** - Chicago Plenum Housing

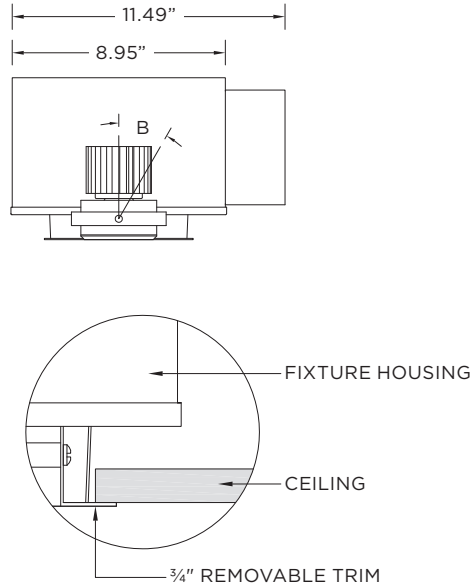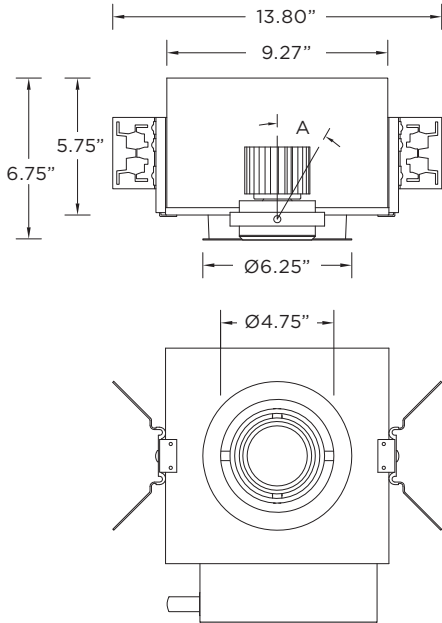


SH - Shallow Housing (IC rated) (2200lm max)

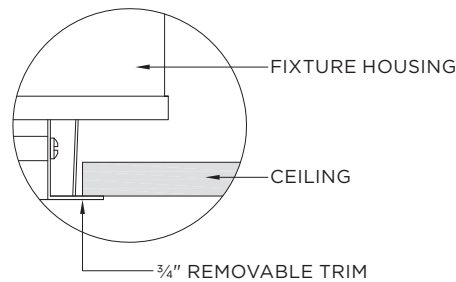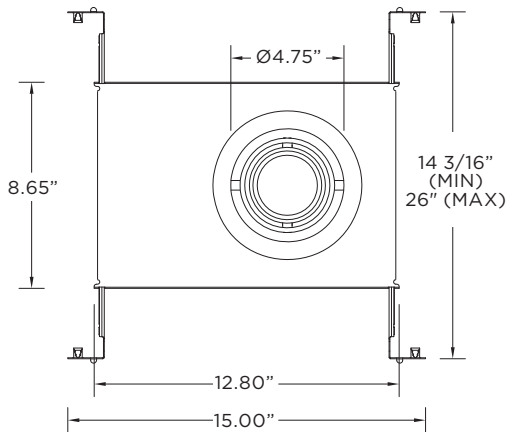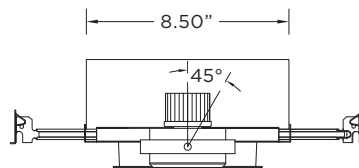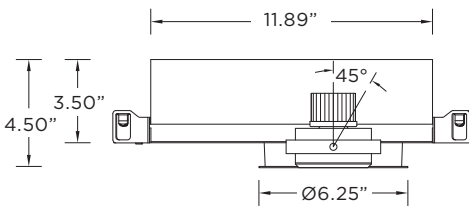

TRIMLESS HOUSING OPTIONS

- NC** - New Construction (Non-IC)
- IC** - IC Housing (2200lm max)
- CP** - Chicago Plenum Housing

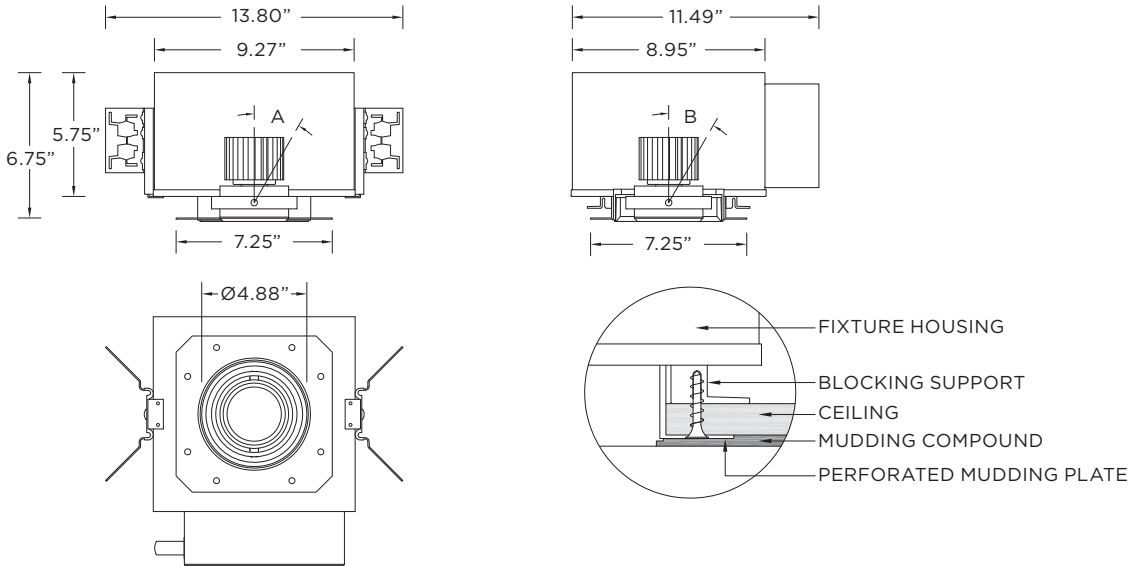

SH - Shallow Housing (IC rated) (2200lm max)

