




3G-RMZ2

2 LIGHT RECESSED ZOIE

2 Light high performance mini downlight with 1.14" apertures
Features matte black or matte white multi-faceted louvers
Regressed LED source with enhanced glare control, UGR <16
Shallow housing standard along with remodel housing option
Standard integral drivers and remote driver options with 1% dimming

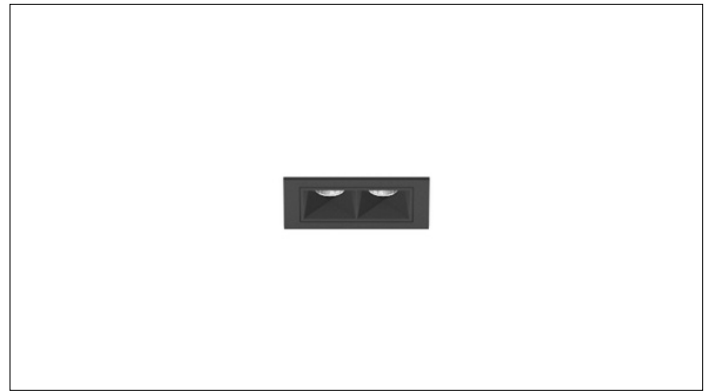

PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3G-RMZ2	04 - 400 LUMENS <small>Lumen output based on 35K. See performance chart for additional info</small>	H90 - 90+ CRI	27K - 2700K 30K - 3000K 35K - 3500K	35D - 35° 55D - 55°	UNV - 120/277V 120 - 120V 347 - 347V ¹

DRIVER	FLANGE TYPE	LOUVER FINISH	HOUSING TYPE
DIM - 0-10V (100-1%) LE - PHASE DIM (TRIAC/ELV, 100-1%) RDIM - REMOTE 0-10V (100-1%) RD01 - REMOTE 0-10V (100-0.1%) RDALI - REMOTE DALI (100-1%) ² RDHLP - REMOTE LUTRON HI-LUME (1% ECOSYSTEM) RD347 - 347V REMOTE 0-10V (100-1%)	WT - WHITE TRIM BT - BLACK TRIM XTR - TRIMLESS (MUD-IN DRYWALL)	WLV - WHITE BLV - BLACK	SH - SHALLOW HOUSING (INTEGRAL DRIVER) SHRM - SHALLOW HOUSING & REMOTE DRIVER OPTION RMDRM - REMODEL FIXTURE & REMOTE DRIVER OPTION <small>Shallow Housing is IC Rated</small>



OPTIONS
CP - CHICAGO PLENUM

¹ 347 available in "DIM" 0-10V only (100-1%)

² DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options

BASED ON 35°, 90+ CRI AND 3500K SOURCE


LUMEN OUTPUT	COLOR TEMP	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
04 - 400 LUMENS	27K	359	4.8	75
	30K	368	4.8	77
	35K	400	4.8	83

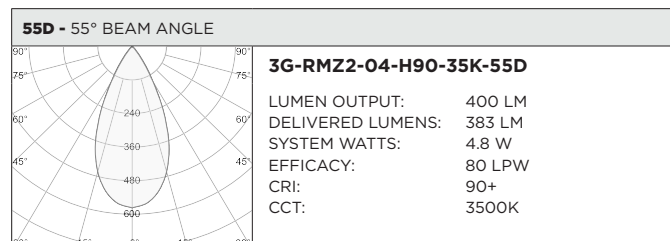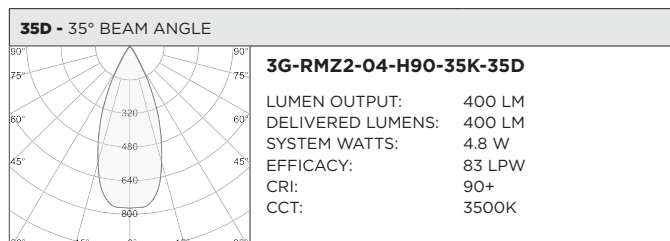


REMOTE POWER SUPPLY OPTIONS

3G DRIVER CODE	DIMMING METHOD	DIMMING RANGE	VOLTAGE	MAX. DISTANCE	3G-RMZ1 (2.4W)	3G-RMZ2 (4.8W)	3G-RMZ4 (9.6W)	3G-RMZ8 (19.2W)	3G-RMZ12 (28.5W)
RDIM	0-10V	100-1%	120-277V	100ft (12AWG)	4 to 16	2 to 8	1 to 4	1 to 2	1
RD347	0-10V	100-1%	347V	100ft (12AWG)	3 to 16	2 to 8	1 to 4	1 to 2	1
RDHLP	LUTRON HI-LUME ECOSYSTEM	100-0.1%	120-277V	100ft (12AWG)	5 to 16	3 to 8	2 to 4	1 to 2	1
RDALI	DALI ELDOLED	100-1%	120-277V	100ft (12AWG)	1 to 16	1 to 8	1 to 4	1 to 2	1
RDO1	0-10V ELDOLED	100-0.1%	120-277V	100ft (12AWG)	1 to 16	1 to 8	1 to 4	1 to 2	1

REMOTE POWER SUPPLY ENCLOSURE

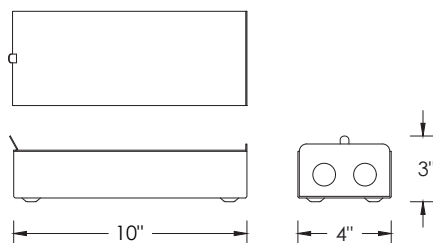

WIRING DIAGRAM

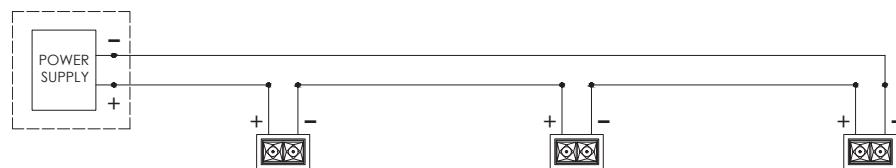

Multiple Zoie fixtures must be connected in series

HOUSING

IC rated shallow housing and Chicago Plenum housing options available
Remodel housing available with remote drivers
Maximum ceiling thickness of 1". Consult factory for modifications
Housings are rated for #12 AWG, (4 in, 4 out), 90°C conductors and through branch wiring

FACETED LOUVER

1.14" aperture with regressed LED source for enhanced glare control
Matte black or matte white faceted louver finish

TRIM

Cast aluminum trim flange with powder coated finish and minimal 0.300" overlap

TRIMLESS

Mudding flange features a perforated surface for easy mud-in application

OPTICS

Proprietary polycarbonate multi-faceted reflectors
Available in 35°, and 55°. UGR <16

LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 No.250.0. Rated for indoor locations

ELECTRICAL

Remote 0-10V, driver option (100-1% dimming standard with 100-0.1% option)
Remote Lutron EcoSystem and eidoLED DALI options (100-1% dimming)
Remote 120V Forward Phase driver option with 100-1% dimming

LED SYSTEM

Osram LED source
Color consistency <2 SDCM
Standard 90+ CRI
Available in 27K, 30K, and 35K
L90 >60,000 hours
5 year warranty


MOUNTING

Trim fixture designed for use in drywall, wood, acoustic ceiling tiles, and other ceiling materials
Trimless fixture designed for use in drywall, mud-in ceiling applications
Recommended ceiling cut-out for remodel fixture: 1.500" x 2.500"
Adjustable bar hangers extend from 14" to 26"


WARRANTY

5 year warranty on LED and drivers
Manufacturer 1 year warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

SH - SHALLOW HOUSING (INTEGRAL DRIVER) (IC RATED AND CHICAGO PLENUM RATED)

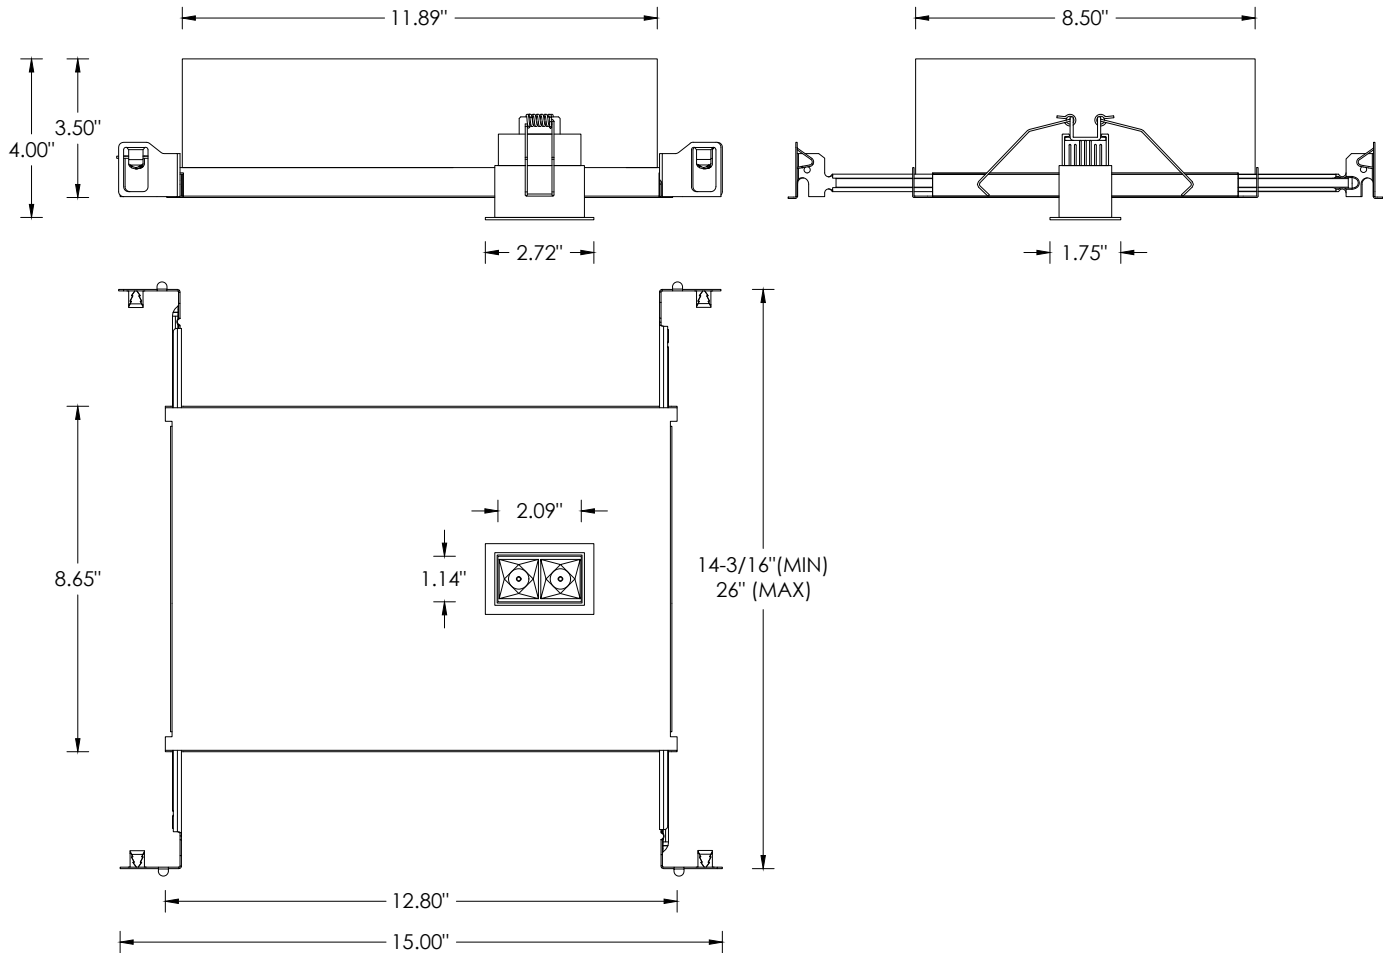


RMDRM - REMODEL FIXTURE (NON-IC) AND REMOTE DRIVER OPTION

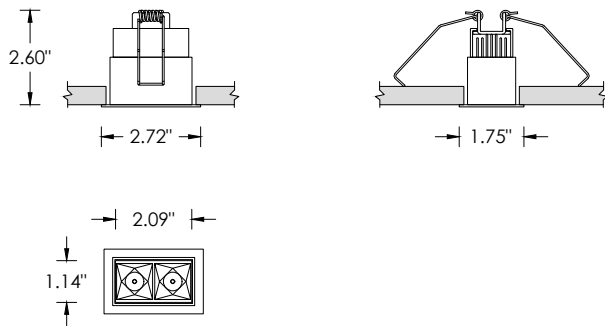


Recommended ceiling cut-out: 1.500" x 2.500"


SHRM - SHALLOW HOUSING & REMOTE DRIVER OPTION (IC RATED AND CHICAGO PLENUM RATED)

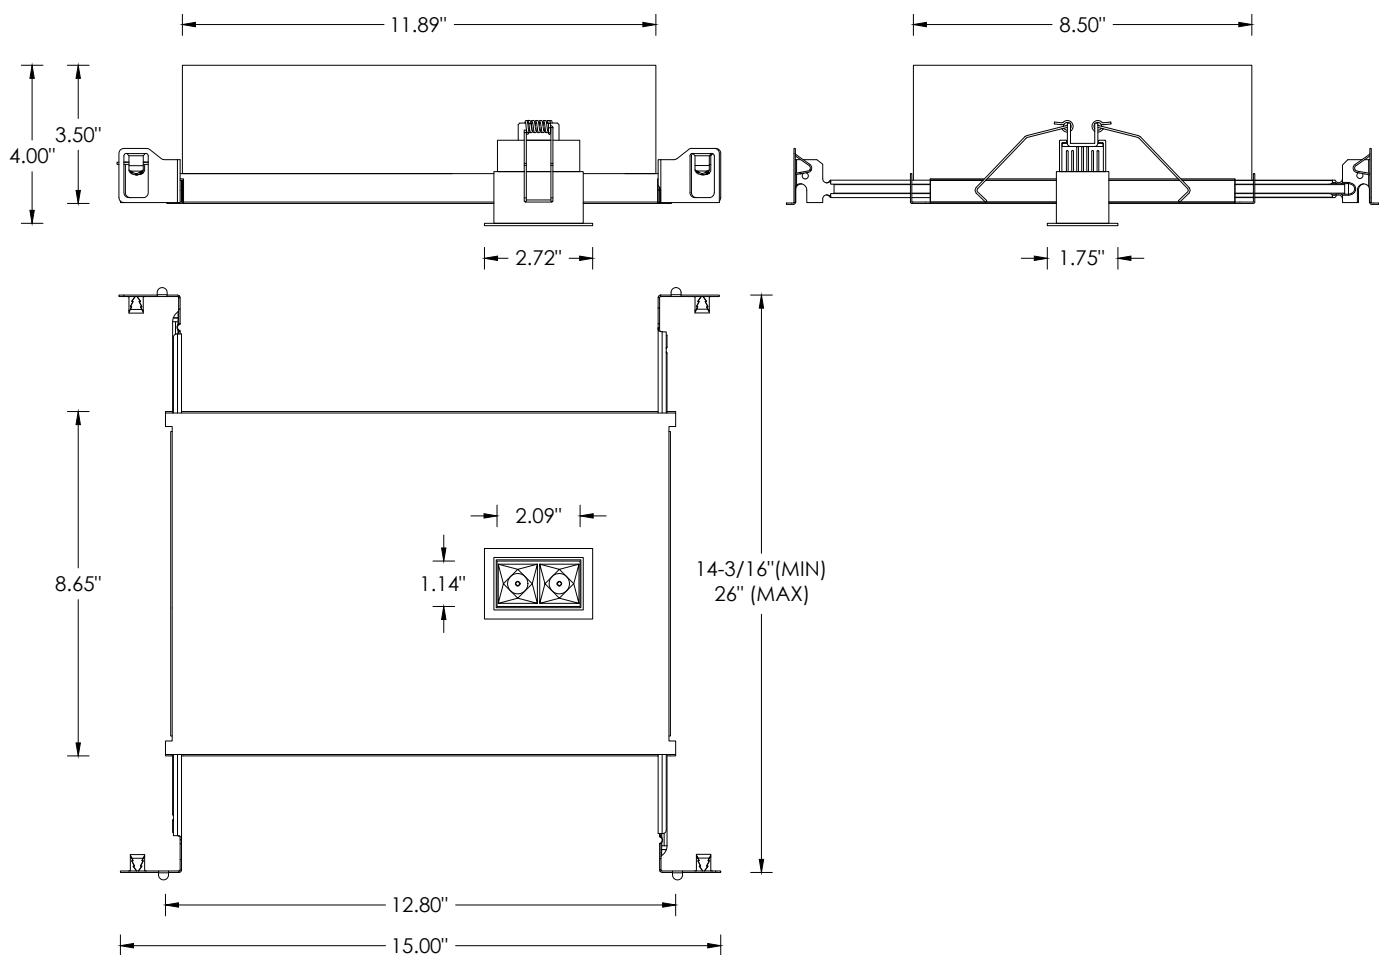

SH - SHALLOW HOUSING (INTEGRAL DRIVER) (IC RATED AND CHICAGO PLENUM RATED)

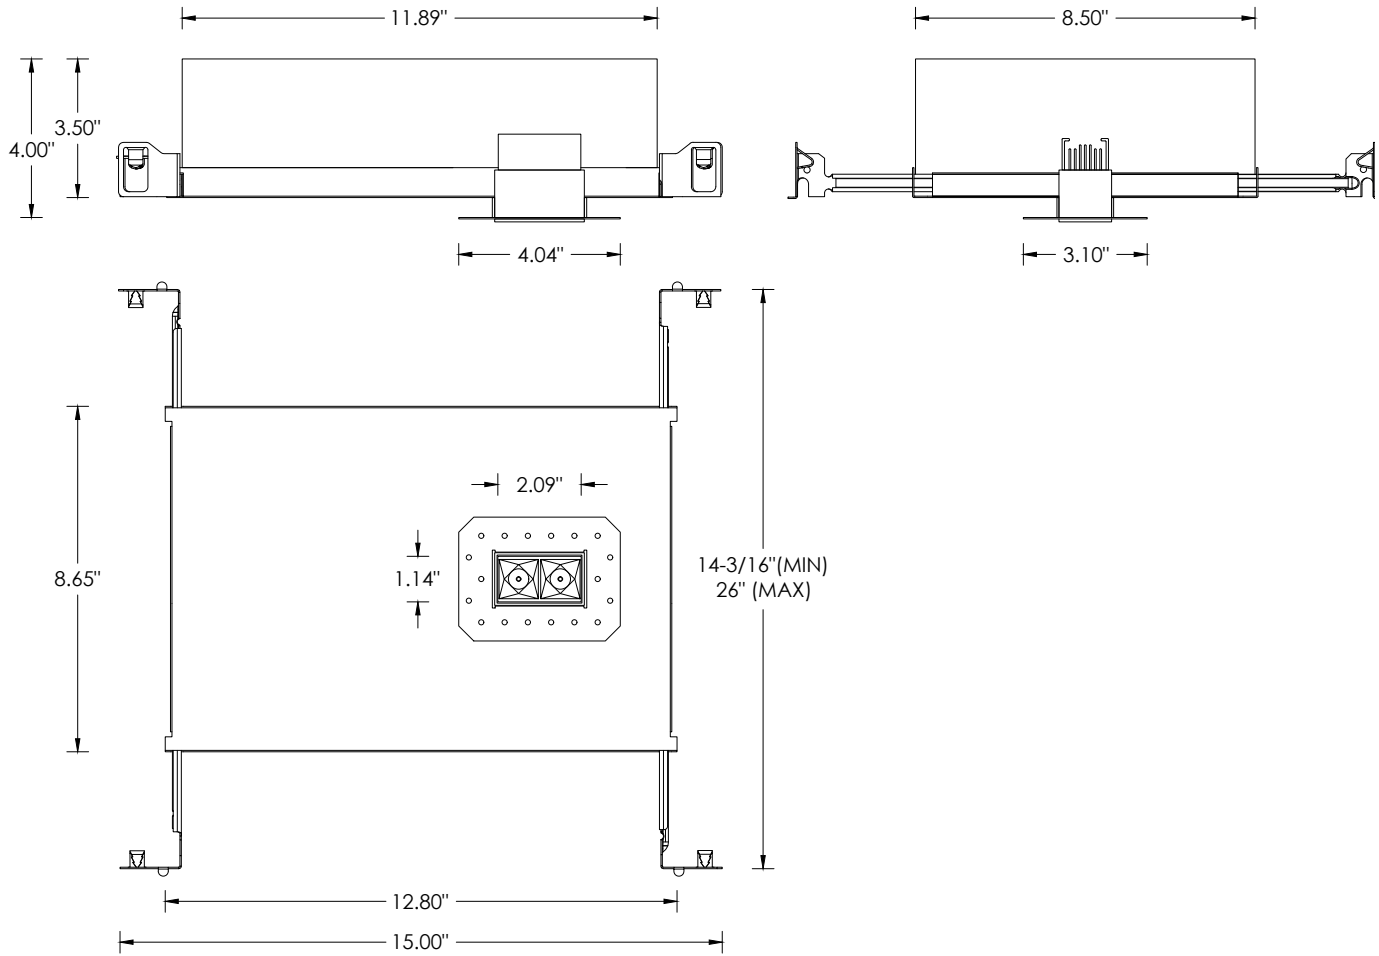

RMDRM - REMODEL FIXTURE (NON-IC) AND REMOTE DRIVER OPTION

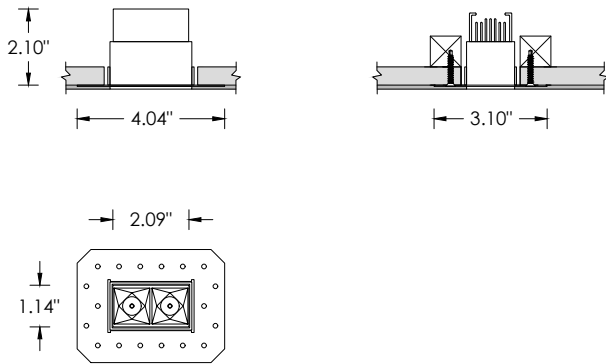

Recommended ceiling cut-out: 1.500" x 2.500"

SHRM - SHALLOW HOUSING & REMOTE DRIVER OPTION (IC RATED AND CHICAGO PLENUM RATED)

