



## 3G-PVLI

V-LINIA  
PENDANT MOUNTED



Extruded aluminum housing with cast aluminum end caps  
V-shaped acrylic lens is fully saturated with proprietary LED system  
Individual fixtures or continuous runs available in 1' increments  
Lumen output range of 250lm to 1000lm per foot  
1% dimming standard with several integral driver options

### ORDERING INFORMATION

<b>PROJECT:</b>	<input type="text"/>	<b>TYPE:</b>	<input type="text"/>
<b>CATALOG #:</b>	<input type="text"/>	<b>DATE:</b>	<input type="text"/>

CAT. NO	LED SYSTEM	CRI	COLOR TEMP	VOLTAGE	DRIVER
<b>3G-PVLI</b>	<b>L1</b> - LOW OUTPUT	<b>S80</b> - 80+CRI (STANDARD) <b>H90</b> - 90+CRI	<b>27K</b> - 2700K	<b>UNV</b> - 120V-277V <b>347</b> - 347V (0-10V ONLY)	<b>DIM</b> - 0-10V (STANDARD 100-1%) <b>DHL2</b> - LUTRON (ECO SYSTEM "H" 100-1%) <b>DALI</b> - DALI (100-1%) <b>DO1</b> - 0-10V (100-0.1%)
	<b>L2</b> - STANDARD OUTPUT		<b>30K</b> - 3000K		
	<b>L4</b> - HIGH OUTPUT		<b>35K</b> - 3500K		
			<b>40K</b> - 4000K		

FINISH	CABLE LENGTH	OPTIONS	LENGTH (FEET)
<b>WH</b> - WHITE (STANDARD) <b>BK</b> - BLACK <b>SV</b> - SILVER	<b>60</b> - 60" <b>120</b> - 120"	<b>EM</b> - INTEGRAL EMERGENCY BATTERY (4' SECTION)	<b>S-2'</b> - 2'
			<b>S-3'</b> - 3'
			<b>S-4'</b> - 4'
			<b>S-5'</b> - 5'
			<b>S-6'</b> - 6'
			<b>S-8'</b> - 8'
			<b>S- ___'</b> (STRAIGHT RUN)*

All mounting canopies provided in white as standard

\*For continuous runs (9' and up), specify length in feet in 1' increments

### PERFORMANCE CHART (Based on 3500K, 4' length)

LED SYSTEM	SYSTEM WATTS (PER FT)	DELIVERED LUMENS (PER FT)	EFFICACY (LM/W)
<b>L1</b> - LOW OUTPUT	3.4	396	118
<b>L2</b> - STANDARD OUTPUT	4.9	584	120
<b>L4</b> - HIGH OUTPUT	8.6	990	115

EDITION 01/19



**TECHNICAL****HOUSING**

Extruded aluminum housing with cast aluminum end caps  
Individual units and continuous runs available in 1' increments  
24 gauge LED reflector with high reflectance white powder coated finish  
Extruded acrylic lens with a satin finish designed for optimal performance and glare control  
Standard polyester powder coated matte white finish. Optional finishes available

**ELECTRICAL**

Standard 0-10V, 100-1% dimming and 0.9 power factor  
Standard 120V-277V universal voltage drivers. Optional 347V 0-10V driver  
Lutron EcoSystem and eldoLED Dali options available with 100-1% dimming  
Integral Emergency Battery option: 90 minutes

**LED SYSTEM**

Proprietary LED system  
Color consistency < 3 SDCM  
Standard (80+CRI). Optional (90+CRI)  
Available in 27K, 30K, 35K, and 40K  
Average rated life of > 50,000 hours  
5-year warranty

**MOUNTING**

Suitable for drywall and wood ceiling (see mounting details)  
Suitable for various grid ceilings applications (see mounting details)  
Aircraft cable suspension with adjustable locking fasteners  
All mounting canopies provided in white finish as standard

**LISTING**

ETL listed and tested to UL standards. Suitable for dry and damp locations

**WARRANTY**


5 Year warranty on LED and drivers  
Manufacturer 1-year warranty for defects in material and workmanship under normal use  
Ambient temperature at fixture should not exceed 25°C

# 3G

## 3G-PVLI


LIGHTING V-LINIA - PENDANT MOUNTED

### DRAWINGS AND DIMENSIONS

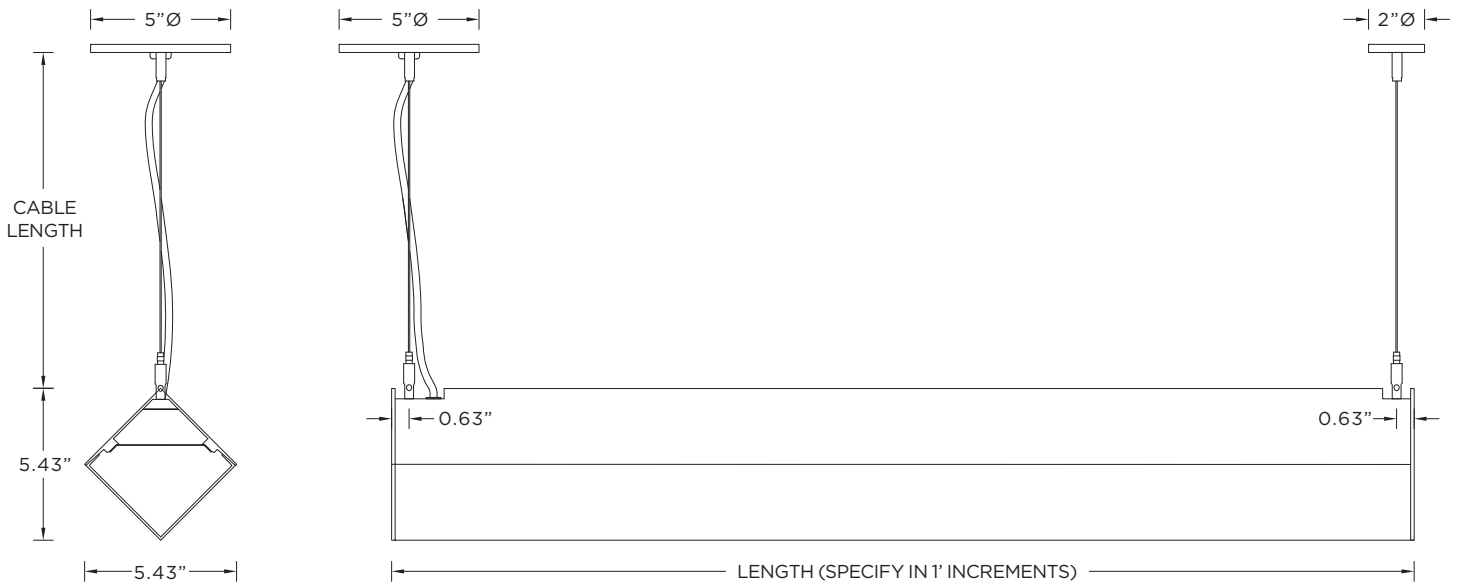


### MOUNTING


GRID POWER FEED



GRID NON POWER FEED



DRYWALL POWER FEED



DRYWALL NON POWER FEED

