

# SURFACE LINIA

**3G-4SLI**  
**3.5" SURFACE**

**3G**  
LIGHTING



DD1



DD2



Pendant Linia



Wall Linia



Recessed Linia

## FEATURES

### CONSTRUCTION

- 3.5" extruded aluminum housing with machined aluminum end caps
- Individual units and continuous runs in 1' increments
- 24 gauge LED reflector with high reflectance white powder coated finish
- Extruded acrylic lens with satin finish available in flush and drop lens options

### ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eidoLED Dali driver available with 100-1% dimming range
- Emergency Battery: 90 minutes

### LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of >50,000 hours
- Color consistency 3 SDCM
- CRI>80 for 27K, 30K, 35K, and 40K

### LUMEN MAINTENANCE

- L70 at >50,000 hours

### MOUNTING

- Suitable for drywall and wood ceilings (see mounting details)

### FINISH

- Standard polyester powder coated matte white finish. Optional matte silver and black finish


### LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

### WARRANTY

- 5 Year limited warranty

<b>PROJECT</b>	<b>TYPE</b>	<b>DATE</b>
<b>CATALOG #</b>		

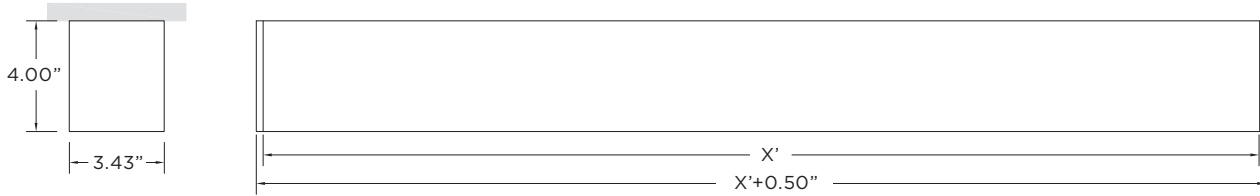


**LENS OPTIONS**

**FL - FLUSH LENS**

**DD1 - 1" DROP LENS**

**DD2 - 2" DROP LENS**



**ORDERING INFORMATION**

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER
<b>3G-4SLI</b>	<b>L1 - LOW OUTPUT</b>	<b>27K - 2700K</b>	<b>120 - 120V</b>	<b>DIM - 0-10V (STANDARD 100-1%)</b>
	<b>L2 - STANDARD OUTPUT</b>	<b>30K - 3000K</b>	<b>277 - 277V</b>	<b>DHL - LUTRON (3-WIRE-100-1%)</b>
	<b>L4 - HIGH OUTPUT</b>	<b>35K - 3500K</b>	<b>347 - 347V (0-10V ONLY)</b>	<b>DHL2 - LUTRON (ECOSYSTEM-100-1%)</b>
		<b>40K - 4000K</b>		<b>DALI - DALI (100-1%)</b>

<b>3G-4SLI</b>				
----------------	--	--	--	--

LENS OPTIONS	FINISH	OPTIONS	LENGTH (FEET)
<b>FL - FLUSH</b>	<b>WH - WHITE (STANDARD)</b>	<b>EM - EMERGENCY BATTERY (4' SECTION)</b>	<b>S - ___' (STRAIGHT RUN)*</b>
<b>DD1 - 1" DROP LENS</b>	<b>SV - SILVER</b>		<b>L - ___' X ___' (L-SHAPE)</b>
<b>DD2 - 2" DROP LENS</b>	<b>BK - BLACK</b>		<b>U - ___' X ___' X ___' (U-SHAPE)</b> <b>R - ___' X ___' (RECTANGLE/SQUARE)</b>
*Individual units available in 3', 4', 5', or 8', continuous runs available in 1' increments.			

--	--	--	--

ORDERING EXAMPLE      **3G-4SLI-L2-30K-120-DIM-FL-WH-S-8'**

Copyright 2016 3G Lighting  
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440  
 3G reserves the right to change, without notice, specifications or materials for product improvement.



# SURFACE LINIA


## 3G-4SLI 3.5" SURFACE



### PERFORMANCE CHART (Based on 3500K, 4' length)

LENS OPTIONS	LED SYSTEM	WATTAGE/FT	LUMENS/FT	EFFICACY (LM/W)	IES FILES
<b>FLUSH</b>	L1 - LOW OUTPUT	3.5W	336	96	<a href="#">DOWNLOAD</a>
	L2 - STANDARD OUTPUT	5.25W	517	98	<a href="#">DOWNLOAD</a>
	L4 - HIGH OUTPUT	8.75W	888	101	<a href="#">DOWNLOAD</a>
<b>1" DROP</b>	L1 - LOW OUTPUT	3.5W	351	100	<a href="#">DOWNLOAD</a>
	L2 - STANDARD OUTPUT	5.25W	541	103	<a href="#">DOWNLOAD</a>
	L4 - HIGH OUTPUT	8.75W	930	106	<a href="#">DOWNLOAD</a>
<b>2" DROP</b>	L1 - LOW OUTPUT	3.5W	345	99	<a href="#">DOWNLOAD</a>
	L2 - STANDARD OUTPUT	5.25W	531	101	<a href="#">DOWNLOAD</a>
	L4 - HIGH OUTPUT	8.75W	913	104	<a href="#">DOWNLOAD</a>

### MOUNTING

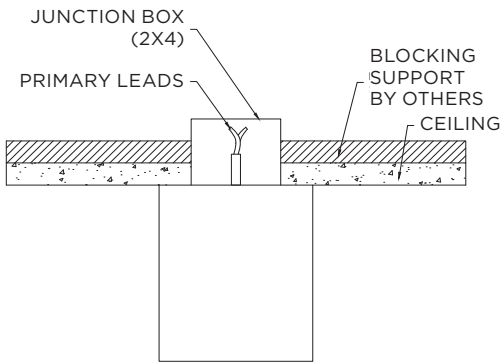

### RUN CHART (Begin measurements at start of run, in a clockwise direction)

#### STRAIGHT (S-\_\_\_')

##### ORDERING EXAMPLE:

3G-4SLI-L2-30K-120-DIM-FL-WH-S-8'



#### L SHAPE (L-\_\_\_' x \_\_\_')

##### ORDERING EXAMPLE:

A - 3G-4SLI-L2-30K-120-DIM-FL-WH-L-8'x6'

B - 3G-4SLI-L2-30K-120-DIM-FL-WH-L-6'x8'




#### U SHAPE (U-\_\_\_' x \_\_\_' x \_\_\_')

##### ORDERING EXAMPLE:

A - 3G-4SLI-L2-30K-120-DIM-FL-WH-U-4'x8'x6'

B - 3G-4SLI-L2-30K-120-DIM-FL-WH-U-6'x8'x4'

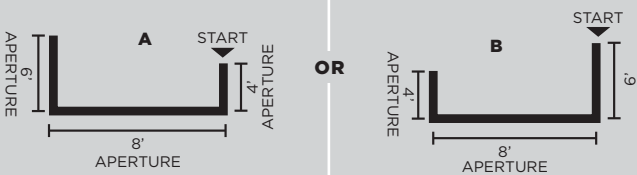

#### RECTANGLE/SQUARE (R-\_\_\_' x \_\_\_')

##### ORDERING EXAMPLE:

3G-4SLI-L2-30K-120-DIM-FL-WH-R-8'x6'

