

# PENDANT KUBO MULTIPLE VERTICAL

**3G-PKU1004V**  
**10" PENDANT**

**3G**  
LIGHTING



**Pendant Kubo Multiple Square**



**24" Pendant Kubo**



**Pendant Kubo Single**



**Pendant Kubo Vertical**

## FEATURES

### CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

### ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

### LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of >50,000 hours
- Color consistency 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

### LUMEN MAINTENANCE

- L70 at >50,000 hours

### MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

### FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

### LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

### WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

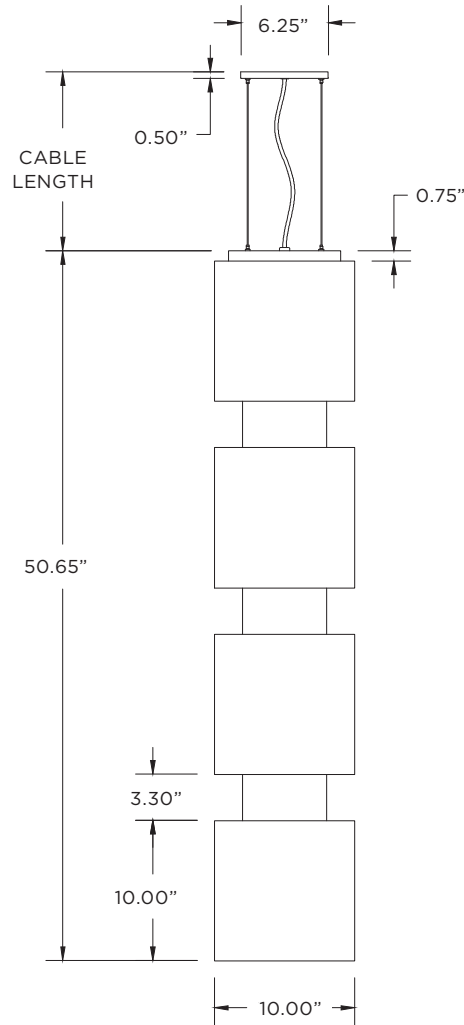

**ORDERING INFORMATION**

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	CABLE LENGTH
<b>3G-PKU1004V</b>	<b>L2</b> - STANDARD OUTPUT	<b>27K</b> - 2700K	<b>120</b> - 120V	<b>DIM</b> - 0-10V (STANDARD 100-1%)	<b>WH</b> - WHITE (STANDARD)	<b>60</b> - 60" (STANDARD)
		<b>30K</b> - 3000K	<b>277</b> - 277V			
	<b>L4</b> - HIGH OUTPUT	<b>35K</b> - 3500K	<b>347</b> - 347V (0-10V ONLY)	<b>DHL</b> - LUTRON (3-WIRE-100-1%)	<b>SV</b> - SILVER	<b>120</b> - 120"
		<b>40K</b> - 4000K		<b>DHL2</b> - LUTRON (ECOSYSTEM-100-1%)		
				<b>DALI</b> - DALI (100-1%)		

**3G-PKU1004V**

ORDERING EXAMPLE

**3G-PKU1004V-L2-35K-120-DIM-WH-60**

Copyright 2016 3G Lighting  
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440  
 3G reserves the right to change, without notice, specifications or materials for product improvement.



# PENDANT KUBO MULTIPLE VERTICAL


**3G-PKU1004V**  
**10" PENDANT**

**3G**  
LIGHTING

## PERFORMANCE CHART (based on 3500K)

LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
STANDARD OUTPUT	45W	4599	103	<a href="#">DOWNLOAD</a>
HIGH OUTPUT	60W	6182	103	<a href="#">DOWNLOAD</a>

## MOUNTING

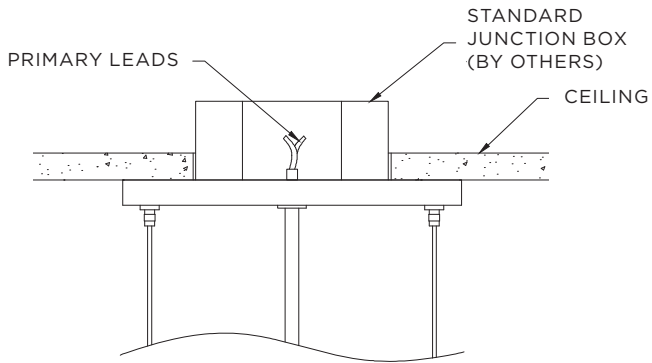

## NOTES