




## 3G-SLKU6

6" LINEAR SURFACE KUBO

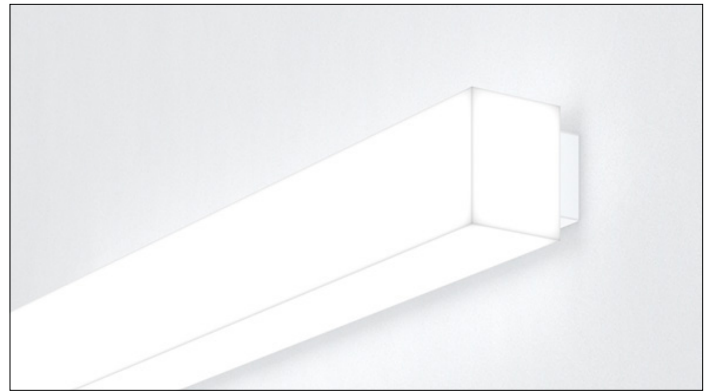

Featuring a white sandblasted acrylic diffuser with mitered corners  
Proprietary LED source fully saturates the hand fabricated acrylic  
Evenly illuminated sides with distinctive lines  
LED system with performance up to 128 lumens per watt  
1% dimming standard with several integral driver options

|           |  |       |  |
|-----------|--|-------|--|
| PROJECT:  |  | TYPE: |  |
| CATALOG#: |  | DATE: |  |
|           |  | QTY:  |  |

| CAT. NO  | RUN TYPE                                                                  | LUMEN OUTPUT                                                                   | CRI                            | COLOR TEMP                                               | VOLTAGE                                   |
|----------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------|----------------------------------------------------------|-------------------------------------------|
| 3G-SLKU6 | S2 - 2'<br>S3 - 3'<br>S4 - 4'<br>S5 - 5'<br>S6 - 6'<br>S7 - 7'<br>S8 - 8' | L250 - 250 LM/FT<br>L500 - 500 LM/FT<br>L750 - 750 LM/FT<br>L1000 - 1000 LM/FT | S80 - 80+ CRI<br>H90 - 90+ CRI | 27K - 2700K<br>30K - 3000K<br>35K - 3500K<br>40K - 4000K | UNV - 120/277V<br>347 - 347V <sup>1</sup> |

| DRIVER                                                                                                                         | FINISH                                  |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| DIM - 0-10V (100-1%)<br>D01 - 0-10V (100-0.1%)<br>DALI - DALI (100-1%) <sup>2</sup><br>DHL2 - LUTRON HI-LUME<br>(1% ECOSYSTEM) | WH - WHITE<br>BK - BLACK<br>SV - SILVER |


<sup>1</sup> 347 available in "DIM" 0-10V only (100-1%)

<sup>2</sup> DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options

BASED ON 80+ CRI AND 3500K SOURCE

| LENGTH | DELIVERED LUMENS | SYSTEM WATTS | EFFICACY (LPW) |
|--------|------------------|--------------|----------------|
| 4'     | 250              | 1.9          | 135            |
|        | 500              | 4.1          | 127            |
|        | 750              | 6.6          | 121            |
|        | 1000             | 9.6          | 115            |

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.97, 35K=1.00, 40K=1.01, 90CRI=0.88

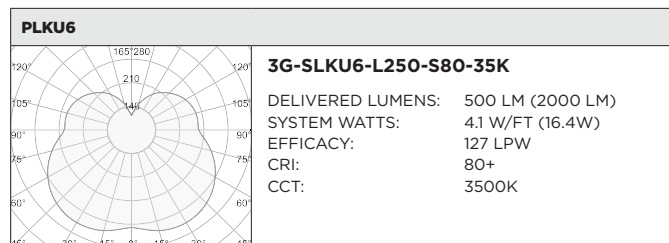

## HOUSING

White sandblasted acrylic diffuser with mitered corners  
 Fixture collar made from cold rolled steel with powder coated finish  
 24 gauge LED reflector with high reflectance white powder coated finish  
 Standard polyester powder coated matte white finish. Optional finishes available

## LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0. Rated for indoor dry or damp locations

## WARRANTY

5 Year Warranty on LED and drivers  
 Manufacturer 1 Year Warranty for defects in material and workmanship under normal use  
 Ambient temperature at fixture should not exceed 25°C

## ELECTRICAL


Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor  
 Standard 120/277V universal voltage with several driver options  
 All drivers are integral and easily accessible through luminaire aperture

## LED SYSTEM

Proprietary LED system with color consistency <3 SDCM  
 Available in 27K, 30K, 35K, and 40K  
 Standard 80+CRI. Optional 90+CRI  
 R9 value of 56 for 90+CRI  
 L90 >60,000 hours

## MOUNTING

Fixture collar mounts to a standard junction box  
 Suitable for various ceiling applications (see mounting details)  
 Suitable for various grid ceiling applications (see mounting details)

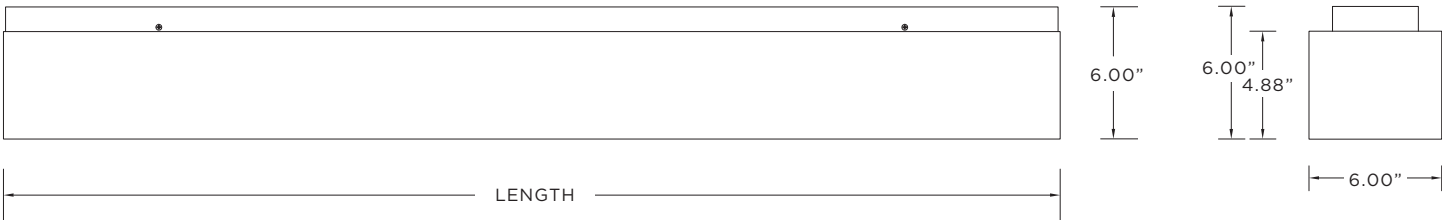

**MOUNTING DETAILS**

