

PENDANT KUBO MULTIPLE SQUARE

3G-PKU822
8" PENDANT

3G
LIGHTING



Pendant Kubo Multiple



Pendant Kubo Vertical



24" Pendant Kubo



Pendant Kubo Single

FEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at 60,000 hours

MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

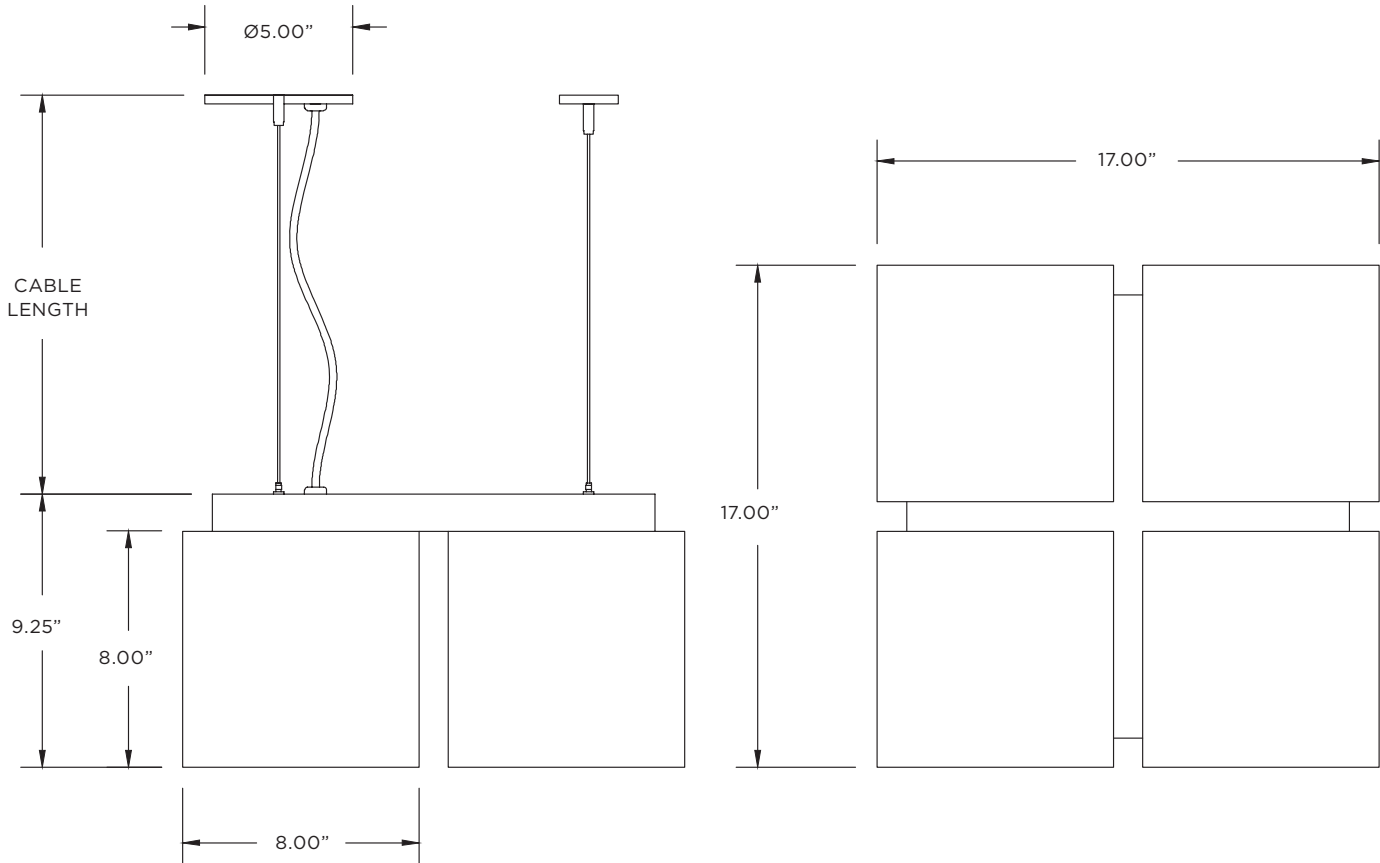

ORDERING INFORMATION

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	CABLE LENGTH
3G-PKU822	L2 - STANDARD OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%)	WH - WHITE (STANDARD)	60 - 60" (STANDARD)
		30K - 3000K	277 - 277V			
	L4 - HIGH OUTPUT	35K - 3500K	347 - 347V (0-10V ONLY)	DHL - LUTRON (3-WIRE-100-1%)	SV - SILVER	120 - 120"
		40K - 4000K		DHL2 - LUTRON (ECOSYSTEM-100-1%)		
3G-PKU822				DALI - DALI (100-1%)		

ORDERING EXAMPLE

3G-PKU822-L2-35K-120-DIM-WH-60

Copyright 2016 3G Lighting
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



PENDANT KUBO MULTIPLE SQUARE

3G-PKU822
8" PENDANT


3G
LIGHTING

PERFORMANCE CHART (based on 3500K)


LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
STANDARD OUTPUT	45W	4599	103	DOWNLOAD
HIGH OUTPUT	60W	6182	103	DOWNLOAD

MOUNTING


GRID POWER FEED




GRID NON POWER FEED



DRYWALL POWER FEED



DRYWALL NON POWER FEED



NOTES