

# PENDANT KUBO MULTIPLE SQUARE

**3G-PKU1222**  
**12" PENDANT**

**3G**  
LIGHTING



**Pendant Kubo Multiple**



**Pendant Kubo Vertical**



**24" Pendant Kubo**



**Pendant Kubo Single**

## FEATURES

### CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

### ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

### LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

### LUMEN MAINTENANCE

- L70 at 60,000 hours

### MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

### FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

### LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

### WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

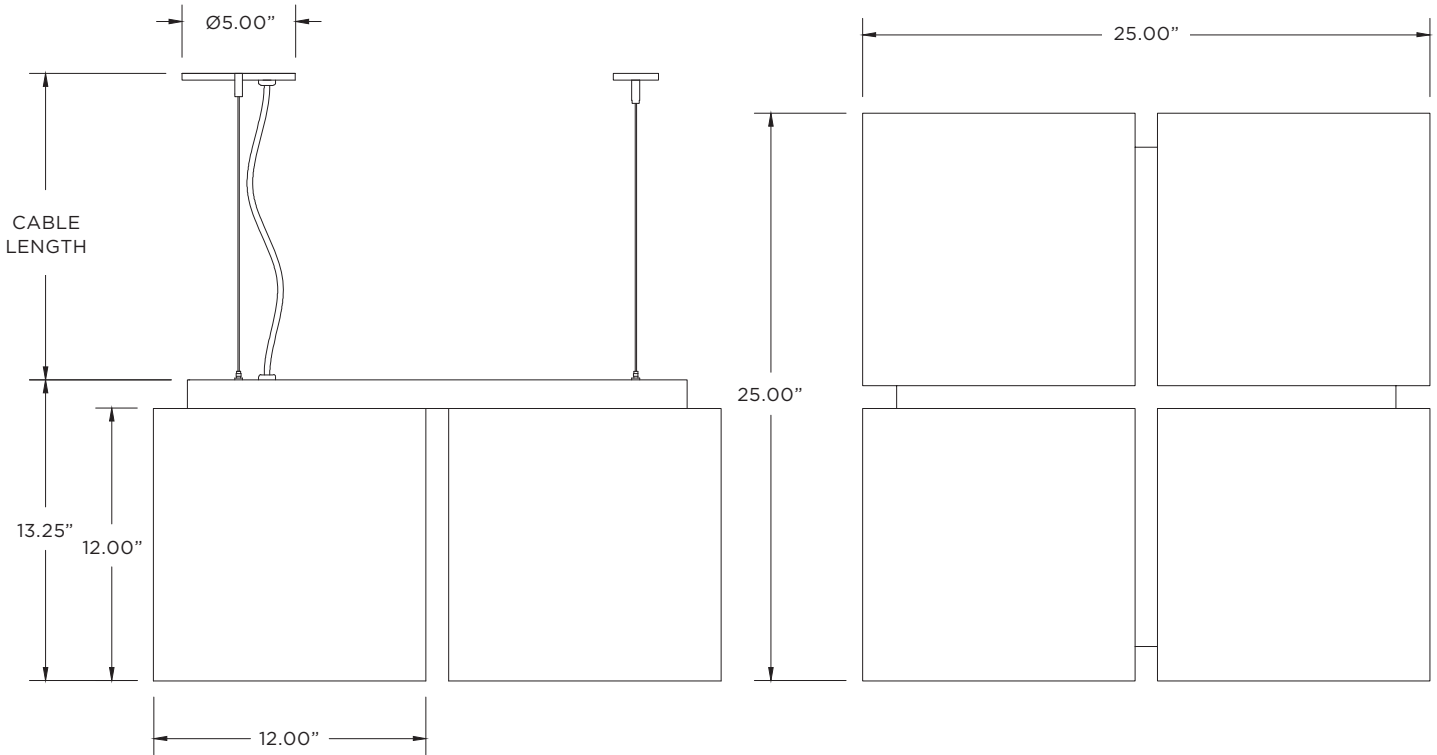

**ORDERING INFORMATION**

| CAT. NO           | LED SYSTEM                  | COLOR TEMP         | VOLTAGE                        | DRIVER                               | FINISH                       | CABLE LENGTH               |
|-------------------|-----------------------------|--------------------|--------------------------------|--------------------------------------|------------------------------|----------------------------|
| <b>3G-PKU1222</b> | <b>L2</b> - STANDARD OUTPUT | <b>27K</b> - 2700K | <b>120</b> - 120V              | <b>DIM</b> - 0-10V (STANDARD 100-1%) | <b>WH</b> - WHITE (STANDARD) | <b>60</b> - 60" (STANDARD) |
|                   |                             | <b>30K</b> - 3000K | <b>277</b> - 277V              |                                      |                              |                            |
|                   | <b>L4</b> - HIGH OUTPUT     | <b>35K</b> - 3500K | <b>347</b> - 347V (0-10V ONLY) | <b>DHL</b> - LUTRON (3-WIRE-100-1%)  | <b>SV</b> - SILVER           | <b>120</b> - 120"          |
|                   |                             | <b>40K</b> - 4000K |                                |                                      |                              |                            |
| <b>3G-PKU1222</b> |                             |                    |                                |                                      |                              |                            |

ORDERING EXAMPLE

**3G-PKU1222-L2-35K-120-DIM-WH-60**

Copyright 2016 3G Lighting  
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440  
 3G reserves the right to change, without notice, specifications or materials for product improvement.



# PENDANT KUBO MULTIPLE SQUARE

**3G-PKU1222**  
**12" PENDANT**


**3G**  
LIGHTING

## PERFORMANCE CHART (based on 3500K)


| LED SYSTEM      | SYSTEM WATTS | DELIVERED LUMENS | EFFICACY LM/W | IES FILES                |
|-----------------|--------------|------------------|---------------|--------------------------|
| STANDARD OUTPUT | 45W          | 4599             | 103           | <a href="#">DOWNLOAD</a> |
| HIGH OUTPUT     | 60W          | 6182             | 103           | <a href="#">DOWNLOAD</a> |

## MOUNTING


### GRID POWER FEED




### GRID NON POWER FEED



### DRYWALL POWER FEED



### DRYWALL NON POWER FEED



## NOTES