



3G-PRU24

24" RUBO
PENDANT MOUNTED



Featuring a fabricated, white sandblasted acrylic diffuser
 Proprietary LED source fully saturates the hand fabricated acrylic
 Evenly illuminated sides with distinctive lines
 Standard and high lumen output options
 Adjustable aircraft cable suspension and rigid stem option
 1% dimming standard with several integral driver options

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER
3G-PRU24	L2 - STANDARD OUTPUT	27K - 2700K	UNV - 120V-277V	DIM - 0-10V (STANDARD 100-1%)
	L4 - HIGH OUTPUT	30K - 3000K	120 - 120V	DHL2 - LUTRON (ECO SYSTEM "H" 100-1%)
		35K - 3500K	347 - 347V (0-10V ONLY)	DALI - DALI (100-1%)
		40K - 4000K		D01 - 0-10V (100-0.1%)
	DMX - DMX (100-0%)			
	Consult 3G for custom outputs			

FINISH	SUSPENSION TYPE	SUSPENSION LENGTH	OPTIONS
WH - WHITE (STANDARD) SV - SILVER	AC - AIRCRAFT CABLE (STANDARD) RSW - WHITE RIGID STEM	60 - 60" CABLE (STANDARD) 120 - 120" CABLE S24 - 24" STEM S48 - 48" STEM S72 - 72" STEM	EM - INTEGRAL EMERGENCY BATTERY SCP - SILVER CANOPY
Canopy provided in white as standard			

PERFORMANCE CHART (Based on 3500K)

LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY (LM/W)
L2 - STANDARD OUTPUT	29W	2915	101
L4 - HIGH OUTPUT	46W	4702	102

EDITION 01/19





3G-PRU24

LIGHTING 24" RUBO - PENDANT MOUNTED

TECHNICAL

HOUSING

- White, fabricated sandblasted acrylic diffuser with distinctive lines
- Fixture collar made from spun aluminum with powder coated finish
- Reflector fabricated in steel with high reflectance white powder coated finish
- Twist and lock construction with no visible hardware
- Standard polyester powder coated matte white finish. Optional matte silver finish

ELECTRICAL

- Standard 0-10V, 100-1% dimming and 0.9 power factor
- Standard 120V-277V universal voltage drivers. Optional 347V 0-10V driver
- Lutron EcoSystem and eLDOLED Dali options available with 100-1% dimming
- All drivers are integral and easily accessible within fixture collar
- Integral Emergency Battery: 90 minutes

LED SYSTEM

- Proprietary LED system
- Color consistency < 3 SDCM
- Standard (80+CRI)
- Available in 27K, 30K, 35K, and 40K
- Average rated life of > 50,000 hours
- 5-year warranty

MOUNTING

- Suitable for drywall and wood ceiling applications (see mounting details)
- Suitable for various grid ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners
- 1/2" diameter rigid stem option with hang straight (field cuttable with provided stem adapter)
- Canopy provided in white finish as standard

LISTING

- ETL listed and tested to UL standards. Suitable for dry and damp locations

WARRANTY

- 5 Year warranty on LED and drivers
- Manufacturer 1-year warranty for defects in material and workmanship under normal use
- Ambient temperature at fixture should not exceed 25°C



3G

3G-PRU24



LIGHTING 24" RUBO - PENDANT MOUNTED

DRAWINGS AND DIMENSIONS

CABLE SUSPENSION

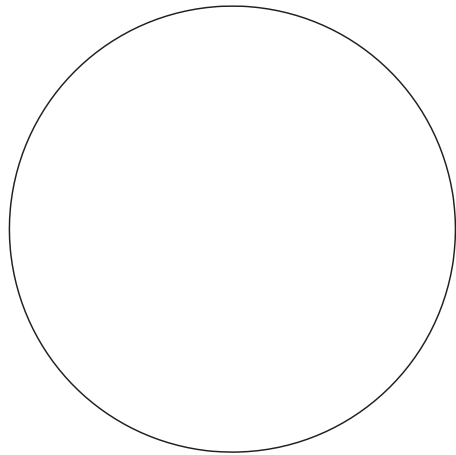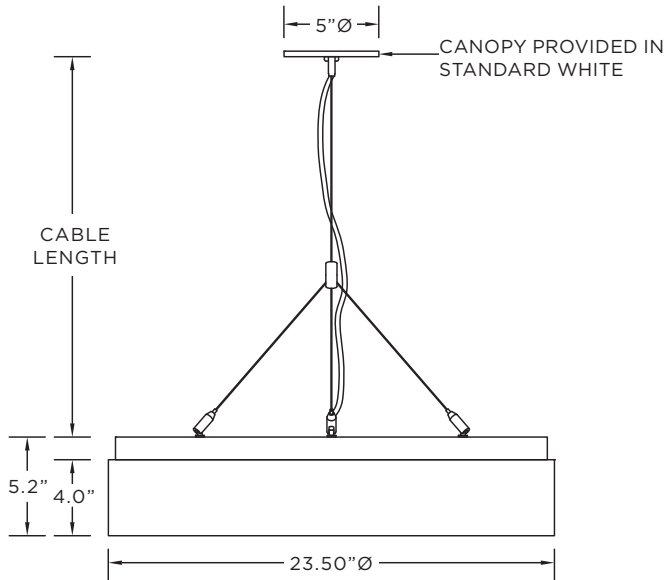


OPTIONAL STEM SUSPENSION

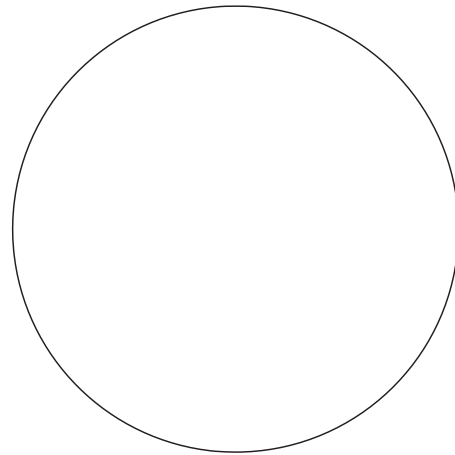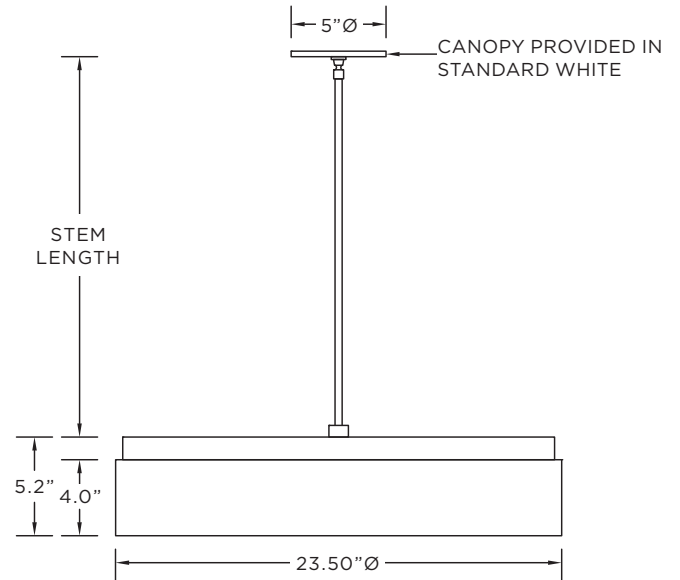

MOUNTING

GRID POWER FEED

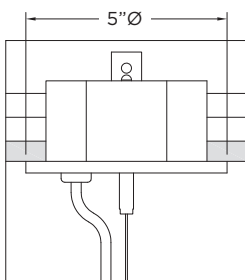

DRYWALL POWER FEED

