



3G-2PLI-D

2" LINEAR PENDANT
DIRECT



Narrow 2" aperture with one piece extruded aluminum housing
Individual or continuous runs available in multiple run configurations
Direct distribution with multiple lumen output options
LED system with performance up to 139 lumens per watt
Extruded acrylic lens available in flush, 1" and 2" drop lens options
Asymmetric optics available
1% dimming standard with several driver options

| | | | |
|-----------|--|-------|------|
| PROJECT: | | TYPE: | |
| CATALOG#: | | DATE: | QTY: |

| CAT. NO | LUMEN OUTPUT | CRI | COLOR TEMP | VOLTAGE |
|-----------|---|---|--|---|
| 3G-2PLI-D | D250 - 250 LM/FT ¹ D500 - 500 LM/FT D750 - 750 LM/FT D1000 - 1000 LM/FT DC___ - CUSTOM OUTPUT (SPECIFY LM/FT) * <small>*Specify custom lumen outputs in 50lm increments (ie: DC600, DC650, DC700) Custom output cannot exceed D1000 DLC minimum lumen output is 500 lm/ft</small> | S80 - 80+ CRI ² H90 - 90+ CRI <small>*DLC listing available with 80CRI</small> | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K <small>*DLC listing available with 35K</small> | UNV - 120/277V 347 - 347V ³ |

| DRIVER | LENS OPTION | FINISH | CABLE LENGTH |
|---|---|---|------------------------|
| DIM - 0-10V (100-1%) D01 - 0-10V (100-0.1%) DALI - DALI (100-1%) ⁴ DHL2 - LUTRON HI-LUME (1% ECOSYSTEM) DMX - DMX (100-0%) | FL - FLUSH LENS DD1 - 1" DROP LENS ⁵ DD2 - 2" DROP LENS ⁵ DASY - ASYMMETRIC LENS | WH - WHITE BK - BLACK SV - SILVER <small>All mounting canopies provided in white as standard</small> | 60 - 60" 120 - 120" |

| OPTIONS | RUN TYPE |
|---|---|
| EMB - EMERGENCY BATTERY * (INTEGRAL) EMC - EMERGENCY CIRCUIT MC2 - MULTIPLE CIRCUITS (2 ZONES) MC3 - MULTIPLE CIRCUITS (3 ZONES) <small>*Minimum 4' section</small> | S - ____' (STRAIGHT) * L - ____'X ____' (L-SHAPE) U - ____'X ____'X ____' (U-SHAPE) R - ____'X ____' (RECTANGLE/SQUARE) T - ____'X ____' (T-SHAPE) X - ____'X ____' (X-SHAPE) CUS - ____ (CUSTOM LAYOUT - PROVIDE DRAWING) <small>*Individual units available from 2' to 8' Continuous runs available in 1" increments as standard</small> |

- ¹ D250 (250LM/FT) not available in 2' length with DALI, D01, DMX, or DHL2. Specify minimum DC350 for those driver options
² S80 (80+ CRI) not available with 27K and 40K
³ 347 available in "DIM" 0-10V only (100-1%)
⁴ DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options
⁵ DD1 (1" drop lens) and DD2 (2" drop lens) available with straight run type only



DLC listing starting at 500 lumens per foot (D500)
Available with 80CRI and 3500K

BASED ON 4' LENGTH (80+ CRI AND 3500K SOURCE)

| LENS OPTION | DELIVERED LUMENS (LM/FT) | SYSTEM WATTS (W/FT) | EFFICACY (LPW) |
|-------------|--------------------------|---------------------|----------------|
| FLUSH | 250 | 2.0 | 124 |
| | 500 | 4.0 | 126 |
| | 750 | 6.1 | 123 |
| | 1000 | 8.3 | 121 |
| 1" DROP | 250 | 4.0 | 124 |
| | 500 | 6.1 | 126 |
| | 750 | 6.1 | 123 |
| | 1000 | 8.3 | 121 |
| 2" DROP | 275 | 2.0 | 138 |
| | 525 | 4.0 | 131 |
| | 775 | 6.1 | 127 |
| | 1025 | 8.3 | 123 |
| ASYMMETRIC | 265 | 2.0 | 133 |
| | 545 | 4.0 | 136 |
| | 805 | 6.1 | 132 |
| | 1080 | 8.3 | 130 |

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.97, 35K=1.00, 40K=1.01, 90CRI=0.88

FL - FLUSH LENS

3G-2PLI-D-D500-FL

DELIVERED LUMENS: 500 LM/FT (2000LM)
 SYSTEM WATTS: 3.9 W/FT (17.6W)
 EFFICACY: 129 LPW
 CRI: 80+
 CCT: 3500K
 LENS OPTION: FLUSH

DD2 - 2" DROP LENS

3G-2PLI-D-D500-DD2

DELIVERED LUMENS: 550 LM/FT (2200LM)
 SYSTEM WATTS: 4.4 W/FT (17.6W)
 EFFICACY: 122 LPW
 CRI: 80+
 CCT: 3500K
 LENS OPTION: 2" DROP

DD1 - 1" DROP LENS

3G-2PLI-D-D500-DD1

DELIVERED LUMENS: 525 LM/FT (2100LM)
 SYSTEM WATTS: 4.4 W/FT (17.6W)
 EFFICACY: 117 LPW
 CRI: 80+
 CCT: 3500K
 LENS OPTION: 1" DROP

DASY - ASYMMETRIC LENS

3G-2PLI-D-D500-DASY

DELIVERED LUMENS: 500 LM/FT (2000LM)
 SYSTEM WATTS: 4.4 W/FT (17.6W)
 EFFICACY: 132 LPW
 CRI: 80+
 CCT: 3500K
 LENS OPTION: ASYMMETRIC

HOUSING

Extruded aluminum housing with narrow 2" aperture
Die cast aluminum end caps add 1/4" to each end of luminaire
Individual units and continuous runs available in 1" increments as standard
24-gauge LED reflector with high reflectance white powder coated finish
Standard polyester powder coated matte white finish. Optional finishes available

OPTICS

Extruded, satin acrylic lens designed for optimal performance and glare control. Up to 8' continuous
Lens options include flush, 1" and 2" drops with illuminated end caps for all drop lenses
High performance asymmetric optics available

LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0. Rated for indoor dry or damp locations
DLC certified. Consult factory for details

WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

ELECTRICAL


Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
Luminaires are pre-wired with factory installed quick connects and branch circuit wiring
All drivers are integral and easily accessible through luminaire aperture
Minimum 4' and maximum 6' length for each integral emergency battery. 10W output for 90 minutes

LED SYSTEM

Proprietary LED system with color consistency <3 SDCM
Available in 27K, 30K, 35K, and 40K
Standard 80+CRI. Optional 90+CRI
R9 value of 56 for 90+CRI
L90 >60,000 hours
5 Year Warranty


MOUNTING

Toolless installation with 3G's proprietary mounting system
Internal, toolless joiner system (latch and hook) easily connects multiple sections together
LED reflectors remain within each fixture section during installation with 3G's click and lock spring system
Adjustable aircraft cable suspension with locking fasteners (60" length standard)
Standard, 18-gauge, 5 conductor single circuit power feed (clear braided finish)
All mounting canopies provided in white finish as standard
Suitable for various architectural ceilings (see mounting details)
Fixture weight: +/- 2.5 lb/ft

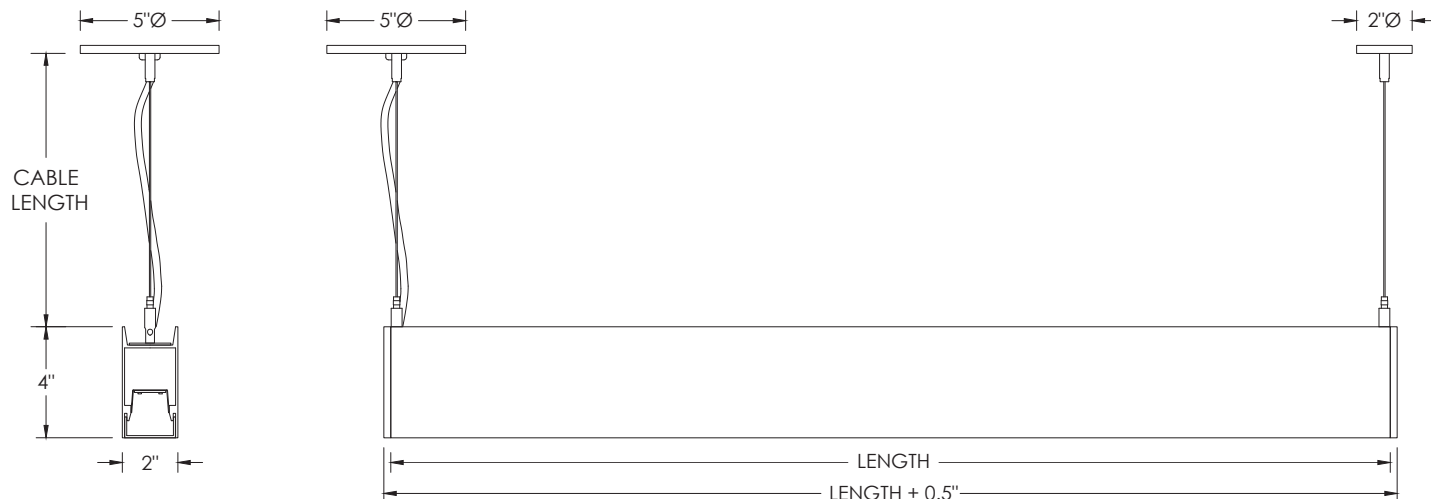


LENS OPTION


FL - FLUSH




DD1 - 1" DROP



DD2 - 2" DROP




DASY - ASYMMETRIC




PATTERNS

Specify pattern shape and overall dimensions as shown below
Patterns are connected with fully illuminated 12"x12" L, T, and X-shaped sections
Please consult factory for custom patterns and shapes not shown below



| L-SHAPE | U-SHAPE | RECTANGLE/SQUARE | T-SHAPE | X-SHAPE |
|--|--|---|---|--|
| Provide dimensions of AxB Example: L - 6'x8' | Provide dimensions of AxBxC Example: U - 8'x10'x6" | Provide dimensions of AxB Example: R - 10'x8' | Provide dimensions of AxB Example: T - 14'x6' | Provide dimensions of AxB Example: X - 14'x14' |
| | | | | |




TYPICAL SECTION MOUNTING

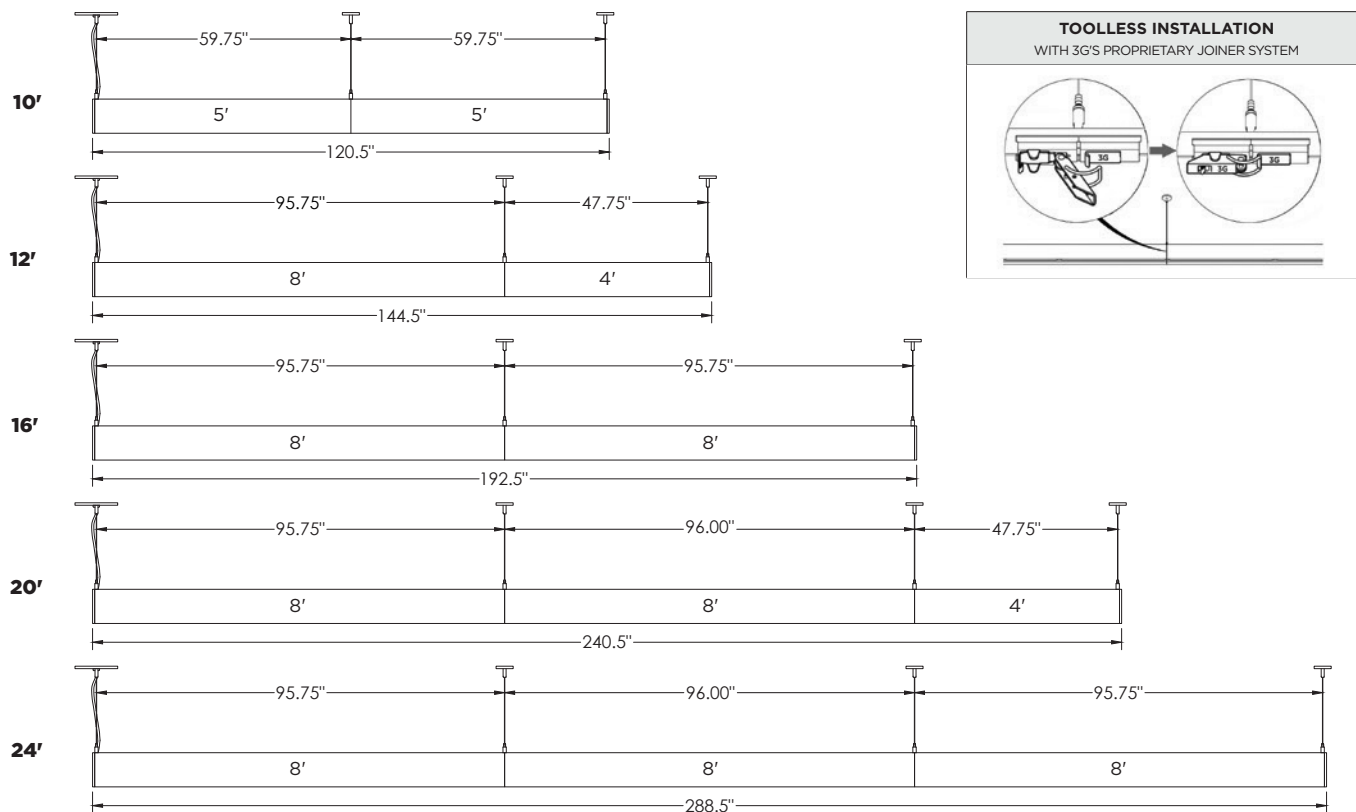

NOTE:

Run lengths and configurations not shown are available in 1" increments as standard

MOUNTING DETAILS
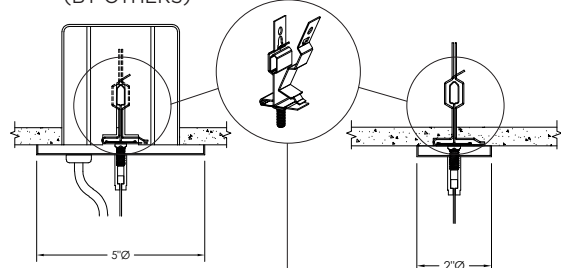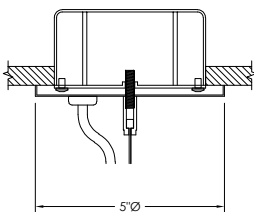
| GRID POWER FEED | GRID NON POWER FEED | DRYWALL POWER FEED | DRYWALL NON POWER FEED |
|--|---------------------|--|---|
| <p>4" SLOTTED JUNCTION BOX (BY OTHERS)</p>  | | <p>OCTAGON JUNCTION BOX (BY OTHERS)</p>  |  |